

89 Series

Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance



The 89 Series is a high-performance axial type resistor. These molded-construction metal-housed resistors are available in higher power ratings than standard axial resistors and are better suited to withstanding vibration, shock and harsh environmental conditions.

The 89 Series Metal-Mite® resistors are aluminum housed to maintain high stability during operation and to permit secure mounting to chassis surfaces.

The metal housing also provides heat-sinking capabilities.



FEATURES

- High Stability: $\pm 0.5\%$ ΔR
- High power to size ratio
- Metal housing allows chassis mounting and provides heat sink capability

SERIES SPECIFICATIONS

Series	Wattage	Ohms	Voltage
805	5	0.10-25K	210
810	10	0.10-50K	320
825	25	0.005-75K	520
850	50	0.005-100K	1170

Non-Inductive versions available. Insert "N" before tolerance code.
Example: 850NF560



CHARACTERISTICS

Housing	Metal, anodized aluminum
Internal Coating	Silicone
Core	Ceramic
Terminals	Solder-coated axial
Derating	Linearly from 100% @ +25°C to 0% @ +275°C.
Tolerance	$\pm 1\%$ and $\pm 5\%$ (other tolerances available).
Power rating	Rating is based on chassis mounting area and temperature stability. Proper heat sink as follows: 5W and 10W units, 4" x 6" x 2" x .040" Aluminum chassis; 25W units, 5" x 7" x 2" x .040" Aluminum chassis; 50W units, 12" x 12" x .059" Aluminum panel.
Maximum ohmic values	See chart.
Overload	5 times rated wattage for 5 seconds.
Temperature coefficient	Under 1 Ω : ± 90 ppm/°C; 1 to 9.99 Ω : ± 50 ppm/°C; 10 Ω and over: ± 20 ppm/°C.
Dielectric withstanding voltage	5W and 10W rating, 1000 VAC; 25 and 50W ratings, 2250 VAC.

(continued)

Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance

(in./mm)

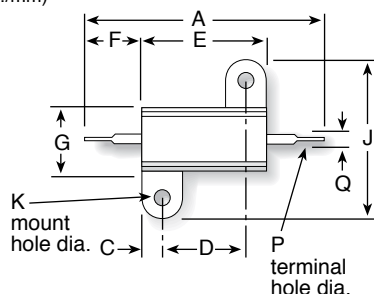

	5 watt	10 watt	25 watt	50 watt
Series (Industrial)	805	810	825	850
Dim. A (in. ± 0.062 / mm ± 1.57)	1.125 / 28.59	1.375 / 34.93	1.938 / 49.23	2.781 / 70.64
Dim. B (in. ± 0.010 / mm ± 0.25)	0.490 / 12.45	0.625 / 15.88	0.781 / 19.84	0.844 / 21.44
Dim. C (in. ± 0.031 / mm ± 0.79)	0.078 / 1.98	0.094 / 2.39	0.172 / 4.37	0.188 / 4.78
Dim. D (in. ± 0.010 / mm ± 0.25)	0.444 / 11.28	0.562 / 14.28	0.719 / 18.26	1.562 / 39.68
Dim. E (in. ± 0.062 / mm ± 1.57)	0.600 / 15.24	0.750 / 19.05	1.062 / 26.98	1.938 / 49.23
Dim. F (in. ± 0.062 / mm ± 1.57)	0.266 / 6.76	0.312 / 7.93	0.438 / 11.13	0.438 / 11.13
Dim. G (in. ± 0.062 / mm ± 1.57)	0.334 / 8.48	0.438 / 11.13	0.531 / 13.49	0.594 / 15.09
Dim. H (in. ± 0.031 / mm ± 0.79)	0.245 / 6.22	0.312 / 7.93	0.391 / 9.93	0.422 / 10.72
Dim. J (in. ± 0.031 / mm ± 0.79)	0.646 / 16.41	0.812 / 20.63	1.094 / 27.79	1.156 / 29.36
Dim. K (in. ± 0.005 / mm ± 0.13)	0.093 / 2.36	0.094 / 2.39	0.125 / 3.18	0.125 / 3.18
Dim. L (in. ± 0.031 / mm ± 0.79)	0.320 / 8.13	0.406 / 10.31	0.562 / 14.28	0.625 / 15.88
Dim. M (in. ± 0.062 / mm ± 1.57)	0.133 / 3.38	0.203 / 5.16	0.281 / 7.14	0.312 / 7.92
Dim. N (in. ± 0.031 / mm ± 0.79)	0.065 / 1.65	0.094 / 2.39	0.094 / 2.39	0.094 / 2.39
Dim. P (in. ± 0.005 / mm ± 0.13)	0.050 / 1.27	0.085 / 2.16	0.085 / 2.16	0.085 / 2.16
Q min AWG	16	12	12	12
Dim. R (in. min/mm.min)	0.085 / 2.16	0.140 / 3.56	0.140 / 3.56	0.140 / 3.56

Non-Inductive Winding ———
Optional (blank = std. winding)

805NF5R0E

Series
805 = 5 Watt
810 = 10 watt
825 = 25 watt
850 = 50 watt

Toleran
F = 1%
J = 5%

Ohms	RoHS Compliant
R005= 0.005Ω	
R10 = 0.1Ω	
1R0 = 1.0Ω	
250 = 250Ω	
1K0 = 1,000Ω	
1K5 = 1,500Ω	
25K = 25,000Ω	

**As of September 2006,
the 89 Series is no longer
offered as Mil. Spec.**

[illegible]

✓ = Standard values

✚ = Non-standard values subject to minimum handling charge per item

Shaded values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling.