
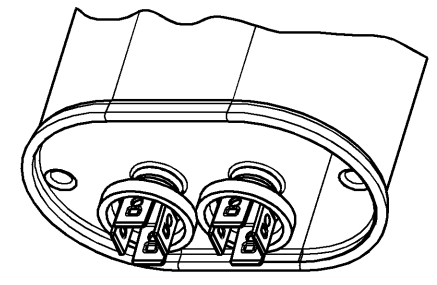
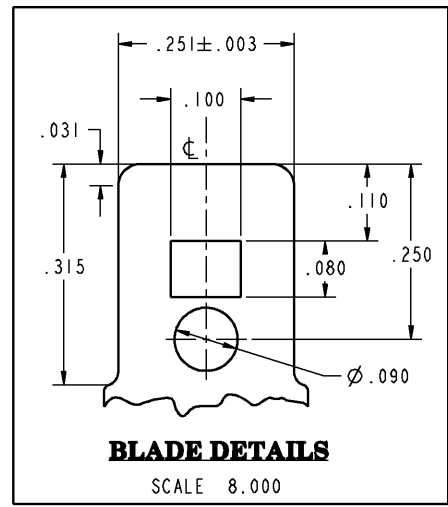


NAME: 501221413 OBJECT: 2T_CAPACITOR_ASM DATE: 21-Nov-05 13:00:18

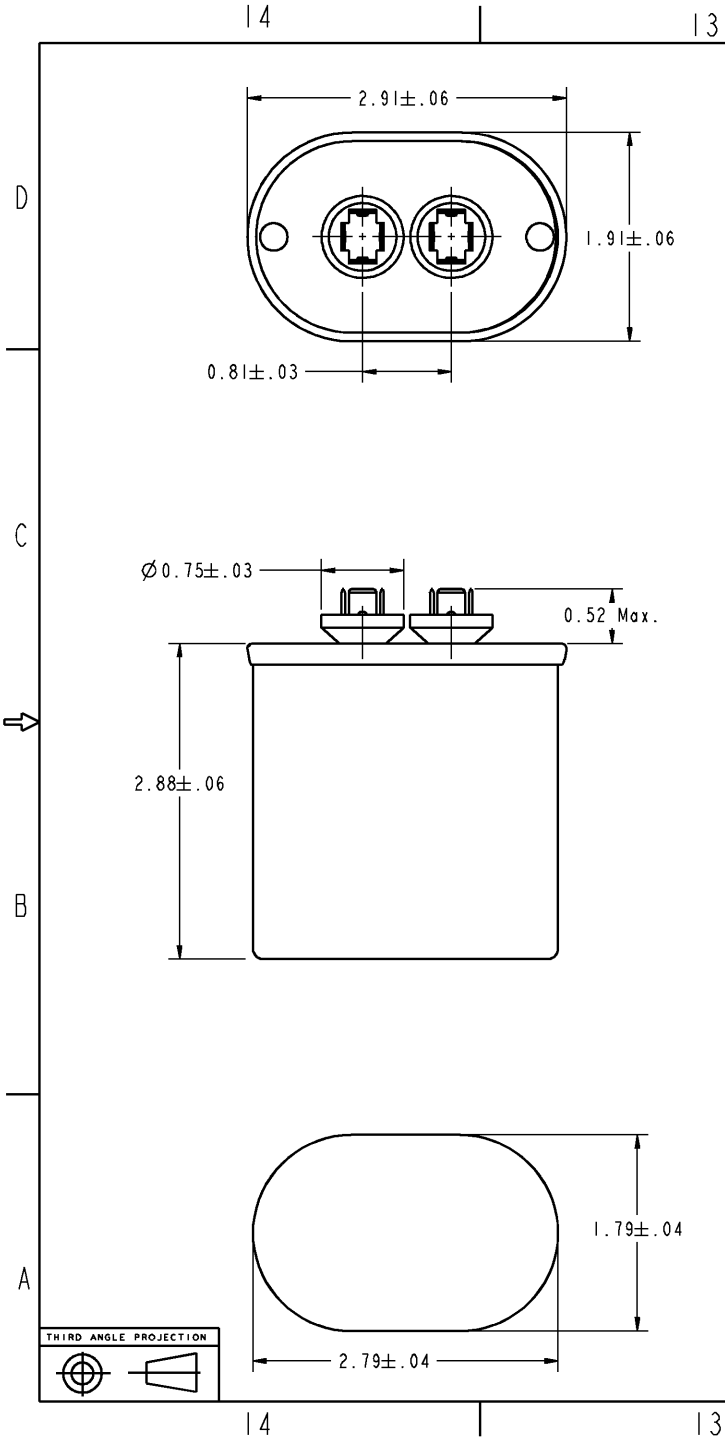

SCALE 1.500

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 20.00 μ F $\pm$ 6%
Secondary Capacitance	: NIL
Volts	: 370AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: TERNPLATE
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE	 REGAL-BELOIT CORPORATION		
APPLIED PRACTICES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MODEL	RAGHU.P.H		05/14/03			
	DETAIL	RAGHU.P.H		05/14/03			
	CHECKED	RAGHU.P.H		05/21/03			
TOLERANCE ON: 1 PL DECIMALS ± 0.1 2 PL DECIMALS ± 0.01 3 PL DECIMALS ± 0.001 ANGLES ± 0.5 FRACTIONS ± FINISH	ENGNG	-	-		GEM III CAPACITOR OUTLINE DRAWING		
	MFG	-	-				
	QUALITY	-	-				
	ISSUED	-	-				
✓		SOLID MODEL: 2TCAPACITOR.ASM		SCALE: 1.250	REF. No: .	97F5463	REV I
MATERIAL						SHEET 1 OF 1	