



RBC PROPRIETARY AND CONFIDENTIAL INFORMATION

This document is the property of REGAL BELLOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the contents thereof be copied, retransmitted, distributed, or otherwise made public without the written consent of RBC, and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon the termination of the loan and may be subject to certain restrictions under U.S. export control laws and regulations.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	Modified per ECN NO. 0627.	11/11/05	HV

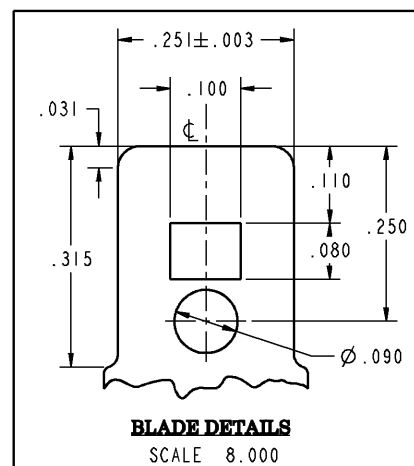

SPECIFICATIONS:

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 48.00 μ F $\pm$ 3%
Secondary Capacitance	: NIL
Volts	: 330AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: TERNPLATE
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE		 REGAL-BELOIT CORPORATION	
APPLIED PRACTICES		MODEL	R. P. HIRURKAR	04/06/05	TITLE GEM III CAPACITOR OUTLINE DRAWING		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DETAIL	R. P. HIRURKAR	04/06/05			
TOLERANCE ON:		CHECKED	R. P. HIRURKAR	04/06/05			
1 PL DECIMALS ± 0.1		ENGRG	-	-			
2 PL DECIMALS ± 0.01		MFG	-	-			
3 PL DECIMALS ± 0.001		QUALITY	-	-	SIZE DRAWING REV C 97F8293 I		
ANGLES ± 0.5		ISSUED	-	-			
FRACTIONS ±							
FINISH	✓	SOLID MODEL: CAPACITOR ASSEMBLY			SCALE: 1:250		REF. No.:
MATERIAL							SHEET I OF I