
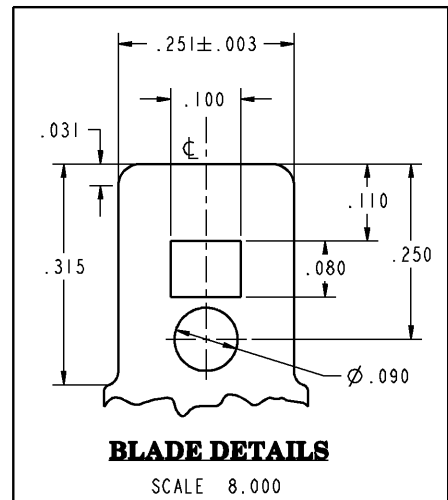



NAME: 501221413 OBJECT: 2T_CAPACITOR_ASM DATE: 21-Nov-05 12:58:44

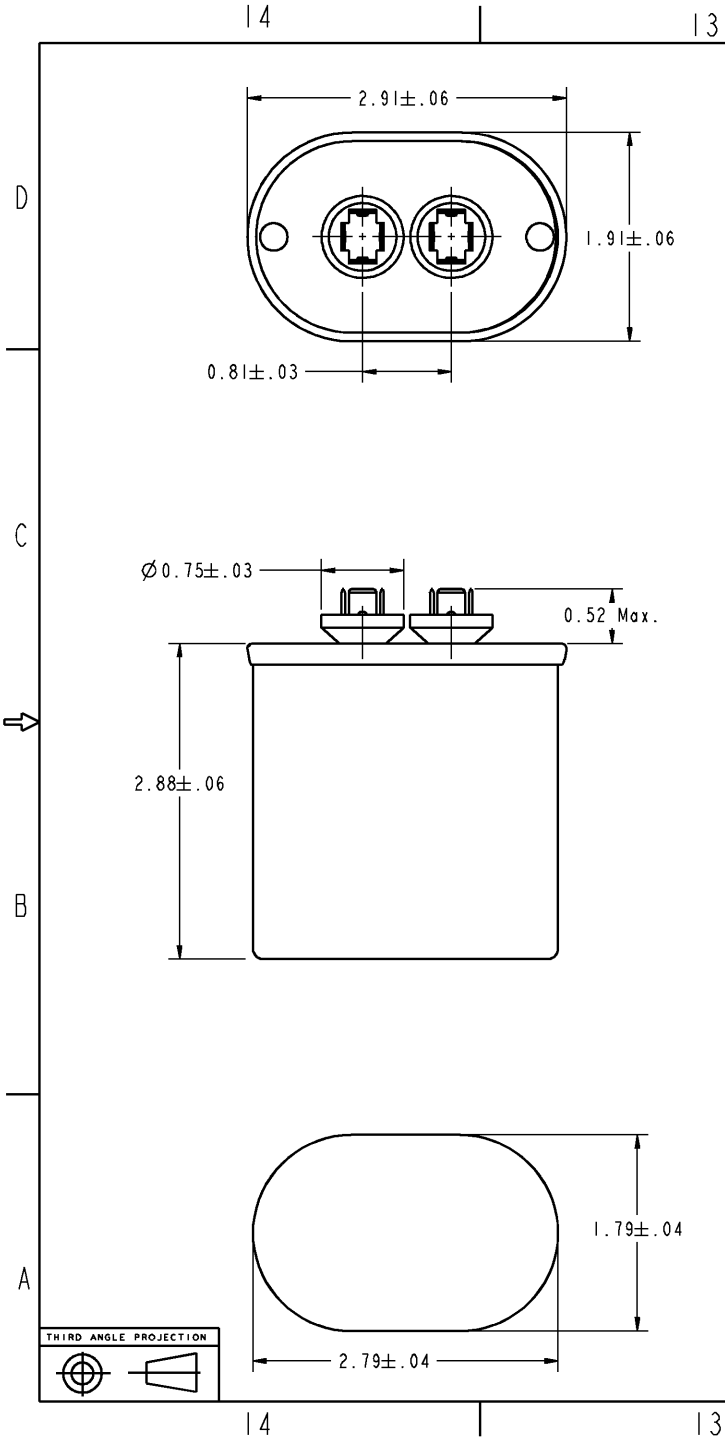

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 20.00 μ F $\pm$ 6%
Secondary Capacitance	: NIL
Volts	: 370AC
Leakage Current	: 30 μ A Max.
Frequency	: 50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	: 60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	: 0.1% MAX.
Case Material	: ALUMINIUM
Cover Material	: TERNPLATE
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	: DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

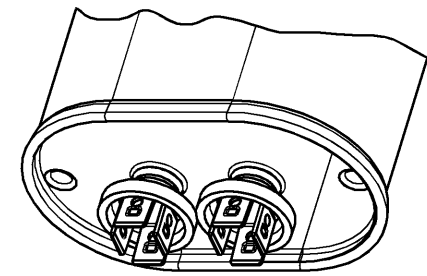

SCALE 1.500

14

13

12

SIZE C DRAWING NO. 97F9603 REV I SHEET 1

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION

This document is the property of REGAL-BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained hereon shall be disclosed in writing without the express written consent of RBC, and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
1	Modified per ECN NO. 0627.	11/11/05	HV

FOR ADDITIONAL INFO REFER TO:

APPLIED PRACTICES	MODEL	RAGHU.P.H	DATE	05/14/03
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DETAIL	RAGHU.P.H	05/14/03	
TOLERANCE ON:	CHECKED	RAGHU.P.H	05/21/03	
1 PL DECIMALS $\pm$ 0.1	ENGRG	-	-	
2 PL DECIMALS $\pm$ 0.01	MFG	-	-	
3 PL DECIMALS $\pm$ 0.001	QUALITY	-	-	
ANGLES $\pm$ 0.5	ISSUED	-	-	
FRACTIONS $\pm$				
FINISH				

MATERIAL

SOLID MODEL: 2TCAPACITOR.ASM

REGAL-BELOIT CORPORATION

TITLE

GEM III CAPACITOR OUTLINE DRAWING

SIZE C DRAWING

97F9603

REV I

SCALE: 1.250

REF. No: .

SHEET 1 OF 1