

CURRENT SENSORS

ELECTRONICS COMPONENTS





Content

Group network map		1
Outline / Applications / Features / Applications map / Guide map		2
Circuit system / Application notes / Part numbering system / Methods of electrical characterization and measurement		6
Important Notice		9
According to UL508 standard and CSA C22.2 No.14 standard		10
Data sheet F-Series, L-Series, S-Series		15

Group network map


Group Network - Overseas

○: Sales □: Factory ▲: R&D

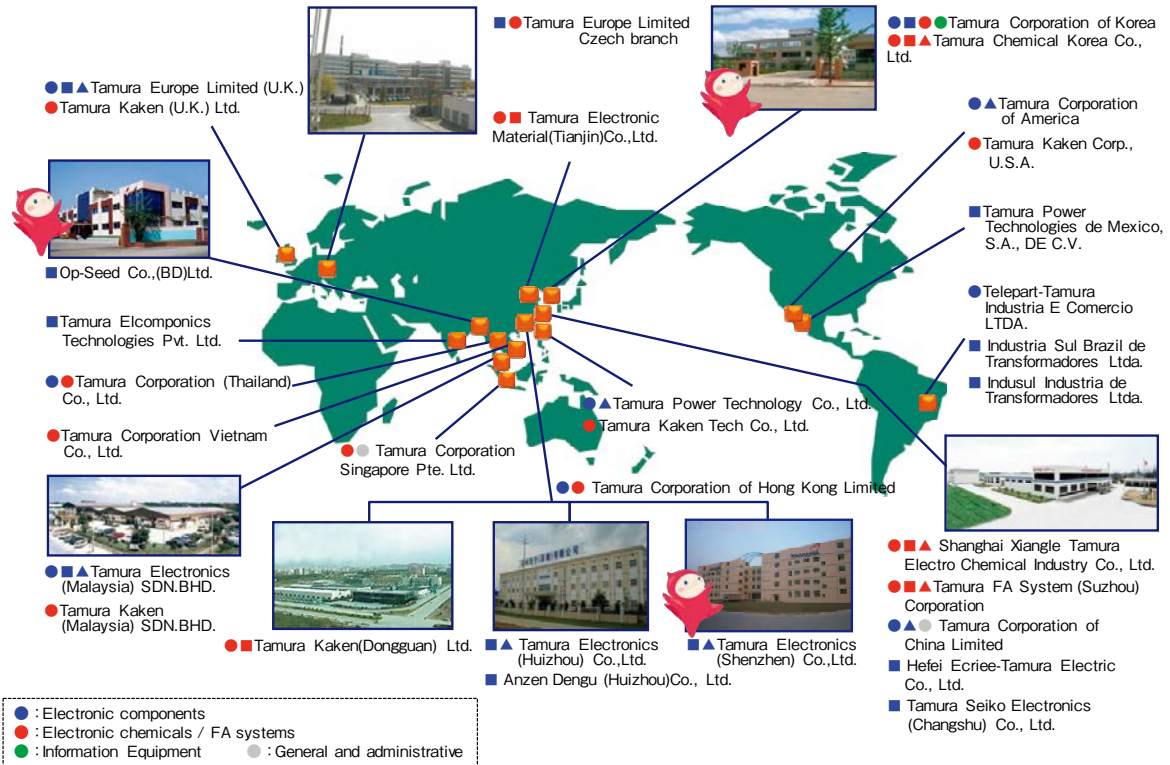

Group Network - Japan

○: Sales □: Factory ▲: R&D

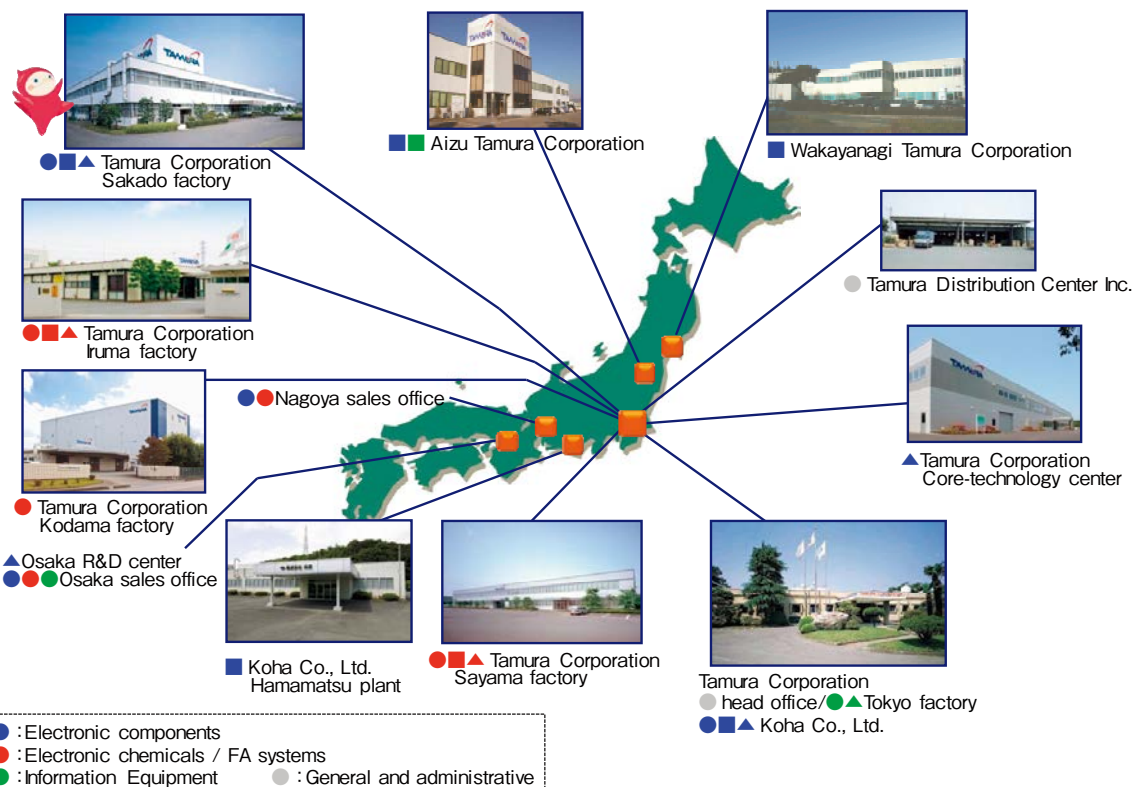

Outline / Applications / Features

Outlines

The current sensor is a sensor to measure the current as its name. However, The current is various. There is a current value up to 10k amperes treated in the power plant from 1mA, and the shape of current waves also has AC, DC, and AC + DC. Since a method and a structure the best in each measuring object are different, there are also various current sensors. Tamura supplies the sensor using the Hall-Effect system for measuring the current value from several amperes to several kilo-ampere.

The Hall-Effect current sensor measures the magnetic flux produced in proportion to the primary current without any direct contact with the primary circuit; the combination of the Hall element and magnetic circuit provide excellent solution for measuring AC/ DC current with galvanic isolation and zero insertion loss.

The diagram in Figure-1 depicts the Hall current sensor basic principle. The magnetic flux produced in proportion to the primary current, I_f , induced in the magnetic circuit, passes through the Hall element inserted in the gap of the magnetic circuit resulting in a potential difference, V_h , expressed by the following formula:

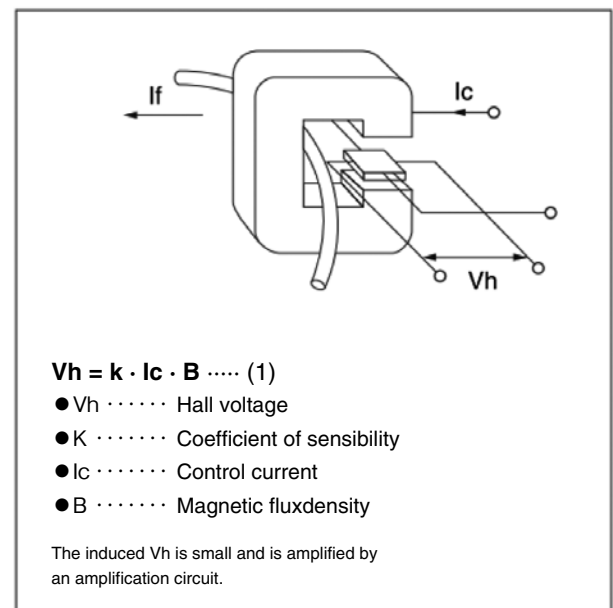


Figure-1

Applications

Current control and detection of over-current in various types of inverters. Used for general-purpose inverter, various types of power conversion equipment to control and to detect over-current. Also used to measure DC current from the battery.

- Various types of inverters (CVCF, vector), Industrial robots, automation, devices, NC
- UPS, Elevator, Laser Cutting Machines, Welding Machines, Various types of Regulated Power Supply
- Solar power generation systems, Wind power systems, Fuel cell systems

Features


Measurement of DC, AC (kHz range), & complex current (AC+DC). Our current range is 3A to 1500A in various mechanical configurations.

- Galvanic isolation with many UL compliant configurations.
- Fast response time
- High Reliability

Applications of Current Sensor

Applications


Series (Example)



L18P	L07P	L06P
L03S	L37S	LA**P
S27S	S28S	S29S




L18P	L08P	L06P
L03S	L37S	S21S
S22S	S27S	S28S



L18P	S22P	S23P
LA**P	F**P	



L03S	L37S	L07P
L08P	S22P	S23P
S21S	S27S	F**P



L03S	L37S	L08P
L34S	S28S	S29S



L18P	L12P	F03P
S22P	S23P	S21S
S27S	S28S	S29S




L03S	L37S	L08P
L06P	L34S	S21S
S27S	S28S	S29S

Current Sensor / Guide map

SERIES	Model	Main Specification					UL R/C	Features
		Circuit System	Mounting Configuration	Primary Conductor	Rated Current	Power Voltage		
F01P 	F01PxxxS05L F01PxxxS05	Fluxgate system	On-board	Built-in bus-bar	6~50A	+5V	●	• Super precision & High stability • F02P & F03P : With reference access • F03P : Longer creepage and clearance distances • Name end "L" ; Backward compatible, Anti-Surge current, Compact
F02P 	F02PxxxS05L F02PxxxS05							
F03P 	F03PxxxS05L F03PxxxS05							
L18P 	L18PxxxD15-OP SL18PxxxD15 L18PxxxD15	Open loop	On-board	Built-in coil/ bus-bar	3~60A	±15V	●	• Low cost • Compact, high performance • Name First "SL18P"; Anti-Sulfurated (Coating, Anti-Sulfurated re-sistance) • Name end "R"; Rated voltage change
	L18PxxxS05 L18PxxxS05R					+5V		
	L18PxxxS12					+12V		
L07P 	L07PxxxD15	Open loop	On-board	Built-in coil	3~30A	±15V	●	• Low cost • Built-in 2 circuits • Name end "S"; Anti-Sulfurated (Coating, Anti-Sulfurated resistance)
	L07PxxxD15S					+5V		
	L07PxxxS05					+5V		
L12P 	L12P025D15	Open loop	On-board	Built-in coil	25A	±15V		• Low cost • Compact
L08P 	L08PxxxD15	Open loop	On-board	Through hole φ16	50~200A	±15V		• Wide range of applications • Name end "W"; Saturation current up, NC pin is deleted.
	L08PxxxD15W/ IPV				100~300A			
L32P 	L32PxxxS05BFS	Open loop	On-board	Built-in bus-bar	50A, 100A	+5V	●	• Ferrite core is used. • With reference access • Used Anti-Sulfurated resistance
	L32PxxxS05FS			Through hole □15×8	50~400A			
L01Z 	L01ZxxxS05	Open loop	On-board	Through hole □15×8	50~600A	+5V		• Wide electrical current range • Compact
L37S NEW 	L37SxxxD15M L37SxxxD15J	Open loop	Connector (MOLEX/JST)	Through hole □20.4×10.4	50~600A	±15V	●	• Design for lower dvdt noise • Succession model of L03SxxxD15W series • Wide electrical current range • Compact
L03S 	L03SxxxD15	Open loop	Connector (MOLEX)	Through hole □20.5×10.5	50~600A	±15V		• Wide electrical current range • Compact • Name end "W"; Saturation current up, Change position of CN (MOLEX or JST)
	L03SxxxD15WM L03SxxxD15WJ		Connector (MOLEX/JST)	Through hole □20.5×10.5	50~800A			
L31S 	L31SxxxS05FS	Open loop	Connector (MOLEX)	Through hole □20.5×10.5	50~600A	+5V	●	• Wide electrical current range • Ferrite core is used. • With reference access • Used Anti-Sulfurated resistance
L06P 	L06PxxxS05	Open loop	On-board	Through hole φ22	300~800A	+5V		• Wide range of applications • Single power supply type
L05Z 	L05Z800S15	Open loop	Connector (JST)	Through hole □20.5×10.5	800A	+15V		• Wide range of applications • Single power supply type

Current Sensor / Guide map

SERIES	Model	Main Specification					UL R/C	Features
		Circuit System	Mounting Configuration	Primary Conductor	Rated Current	Power Voltage		
L34S 	L34SxxxD15	Open loop	Connector (MOLEX)	Through hole □40.5×40.5	200~1500A	±15V	●	- High-Current (1500A_max) - Wide electrical current range - Large aperture
LA01P(M) 	LA01PxxxS05	Open loop	On-board (Discrete)	Built-in bus-bar	35~85A *1	+5V		- Open loop - one chip ASIC model - Low profile package (8.5mm on PCB) - High-speed response *1 : Measurement current range
	LA01MxxxS05		On-board (SMT)		21~41A *1			
LA02P LA03P NEW 	LA02PxxxS03	Open loop	On-board (Discrete)	Built-in bus-bar	21~85A *1	+3.3V	●	- Open loop - one chip ASIC model - Creepage distance : 13mm - Low profile package (9.2mm on PCB) - High-speed response *1 : Measurement current range
	LA03PxxxS05					+5V		
S22P 	S22PxxxS05M2 S22PxxxS05P	Closed loop	On-board	Built-in bus-bar	6~25A	+5V	●	- Voltage - output type - Name end "M2"; Backward compatible of normal model, External magnetic field improvement model - Name end "P"; Short lead model of normal model
S23P 	S23PxxxD15M2 S23PxxxD15M1 S23PxxxD15	Closed loop	On-board	Built-in bus-bar	100A	±15V	●	- High accuracy, High performance - Name end "M2"; Backward compatible, dv/dt improvement type - Name end "M1": Conversion Ratio 1:1000 - Conversion Ratio - Normal & M2 type are 1:2000
S25P 	S25P050D15X S25P100D15Y S25P100D15X S25P150D15Y	Closed loop	On-board	Through hole □13×8.5	50~150A	±15V	●	- High accuracy, High performance - Conversion Ratio 1:1000 (Name end "X"), 1:2000 (Name end "Y")
S21S 	S21S180D15JN	Closed loop	Connector (JST)	Through hole R10	180A	±15V	●	- Semicircle aperture - Conversion Ratio 1:4000
S20S 	S20S200D15M1	Closed loop	Connector (JST)	Through hole φ20.5	200A	±15V		- High accuracy, High performance - Conversion Ratio 1:2000
S26P 	S26P200D15Y	Closed loop	On-board	Through hole □17×11	200A	±15V	●	- High accuracy, High performance - Conversion Ratio 1:2000
S27S 	S27S300D15Y S27S300D15YM	Closed loop	Connector (MOLEX)	Through hole φ20	300A	±20V	●	- High accuracy, High performance - Conversion Ratio 1:2000 - Connector:MOLEX (2 type)
S28S 	S28S500D24Z S28S500D24ZM	Closed loop	Connector (MOLEX)	Through hole φ30	500A	±24V	●	- High-current, High accuracy - Conversion Ratio 1:5000 - Connector:MOLEX (2 type)
S29S 	S29S1T0D24Z S29S1T0D24ZM S29S1T0D24ZJ	Closed loop	Connector (MOLEX/JST)	Through hole φ38.5	1000A	±24V	●	- High-current, High accuracy - Conversion Ratio 1:5000 - Connector:MOLEX (2 type), JST (1 type)

Circuit system

Tamura offers multiple current sensor options to meet application requirements: Open Loop or Linear type (magnetic proportionality); Closed Loop or Servo-type (magnetic balance); Flux-Gate (magnetic equilibrium).

Open loop

If the current is applied to the cable, the magnetic field proportional to the current in surroundings of the cable is generated on Ampere's rule. The magnetic core is set in surroundings of the cable to improve the sensitivity. The Magnetic field is converted into the voltage by the linear type - hall element is placed in the gap of the magnetic core. But the output voltage of hall element is several tens of milli-volt, It enlarges it to the output voltage of the product specification (several volts) by the operational amplifier.

The sensor output voltage is linearly proportional to the magnetic flux generated by the measured current. In general, the open loop sensor is voltage output. The characteristic (accuracy, linearity, response, temperature property, and high-frequency current*1, etc.) of the current sensor is not a little better than that of other circuit methods because of the difference of the circuit configuration (magnetic circuit, magnetism-electric conversion and amplification of electrical circuit). However, the size can be reduced and it is lower-cost more than other circuit methods.

*1-We use silicon steel and permalloy in internal magnetic core of the open-loop sensors in order to improve the measurement possible current and hysteresis error. Therefore, at the frequency of the applied current exceeds more than several KHz, there is a possibility that the internal circuit may be damaged by the heat generation of the core loss.

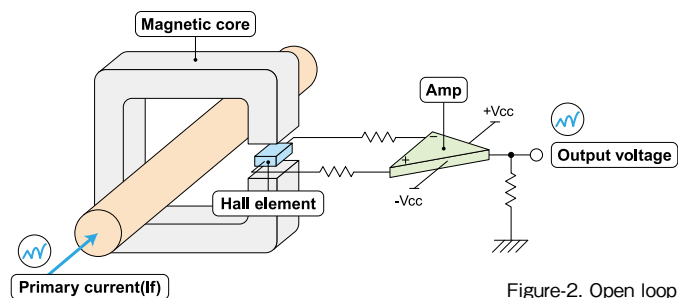


Figure-2. Open loop

Closed loop

The closed loop type current sensor measures the applied current on the condition that the magnetic flux density in the magnetic core is extremely zero. Therefore, there is no influence on accuracy by the non-linearity and hysteresis in the core because the flux density in the magnetic core operates in the starting point of the B-H curve in the operation region*1. The characteristic of the closed loop type is better than the open loop type current sensor.

The addition of a secondary winding (1000-5000 turns) on the magnetic core allows feedback current to be supplied in opposition to measured current to compensate or cancel the magnetic flux generated by the measured current. The output of the closed loop sensor is a current output proportional to the measured current divided by the number of secondary winding turns*2.

*1-At the high-frequency current (1-2kHz or more) and the pulse current, current sensor should operate at ACCT (transformer) because the loop gain of the feedback control decreases. Under such a condition, the magnetic flux in the magnetic core is generated.

*2-Output current = (Primary current) / (Secondary winding turns)

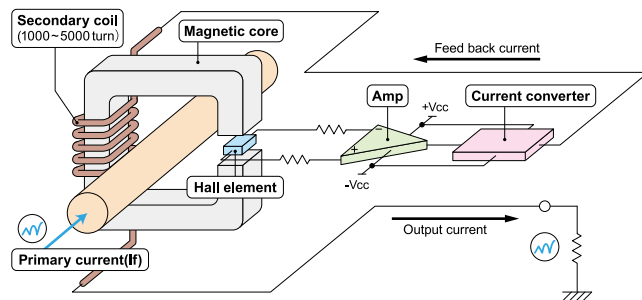


Figure-3. Closed loop

Fluxgate system

The flux-gate current sensor replaces the Hall element with probe coil made of highly saturable material. The magnetic offset of the probe coil does not occur in order to be driven by high-frequency current. The flux-gate utilizes a magnetic balance system to achieve high accuracy, temperature stable current output typically converted to a voltage output with an internal high precision resistor.

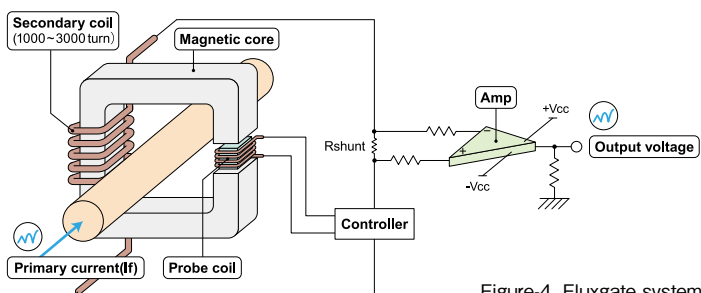


Figure-4. Fluxgate system

Application notes

<General Considerations>

1. The sensor uses polar electronic components. When the polarity of the power supply is mistaken, the sensor is damaged.
2. Static electricity or excessive voltage can increase an offset voltage in the Hall element, and cause offset voltage to change. Please exercise care in handling and application.
3. In order to prevent the influence of noise, the use of twisted cable or shielded cable for the output line is recommended
4. If using this device within a magnetic field generated by other devices, the specified accuracy may not be obtainable.
5. Our products (several models are excluded) are adjusted with the trimming method by the measurement condition (Load resistance, Power supply voltage) of specification sheets. Therefore, characteristics (Offset, Output, etc.) and its deviation may be changed in different circuit conditions from the measurement condition. All change characteristic items are not indicated on specification sheets.
6. The performance of current sensors with through-hole (aperture) is dependent on the position of the primary conductor. Tamura specifications are based on a primary conductor completely filling the through-hole (aperture) area.
7. The current sensor rated current in DC Amps.
8. Please use mating connector with equivalent terminal plating material to insure proper operation and avoid possibility of 'galvanic corrosion' .
9. Please do not store in high-temperature and high-humidity storage environment. Please use it after confirming soldering when it is kept for six months or more. (product soldered with substrate)
10. We recommend performing a zero offset adjustment by measuring the offset voltage at startup. In continuously operation for a few months, or at change of ambient temperature or humidity is large, we recommend regularly performing a zero offset adjustment at being idling (it is clear that the current is not apply) .

<Open loop>

1. High frequency primary current may result in excessive heating in iron magnetic core and cause damage to internal circuitry; for high frequency applications select current sensor with ferrite core material.
2. If the measured current exceeds the rated current, magnetic core saturation will occur and the output voltage signal will not be linearly proportional to the measured current.

<Closed Loop>

1. For closed loop current sensors please insure the power supply voltage is balanced, symmetrical, and, applied simultaneously to avoid potential increase in DC offset error.
2. Maximum rated current measurement duration is timedependent. Maximum rated current applied in excess of the time limit can result in damage to internal electronic circuitry; please consult Tamura for assistance.
3. When using a measurement resistor to convert current output to voltage output select a resistor with stable temperature characteristic to insure accuracy of the output voltage.
4. Compensation current supplied to the secondary winding varies in proportion to the measured current based on the conversion ratio. (If/ KN ; KN = secondary turns) Please insure the PSU has required current capacity to supply compensation current to the secondary winding.

<Flux-Gate>

1. Compensation current supplied to the secondary winding varies in proportion to the measured current. Please insure the PSU has required current capacity to supply compensation current to the secondary winding.
2. There is 450kHz ripple voltage present on the output and reference output voltage signals . An external capacitor maybe added if necessary.

Part numbering system

Outlines

Ex)

L03 S * D 15**
S22 P * S 05**
① ② ③ ④ ⑤ ⑥

① Model (3 figures or 4 figures)

L ** : Open loop system (Magnetic Proportion System)
S ** : Closed loop system (Servo system)
F ** : Fluxgate system
LA ** : Open loop system - One chip ASIC

② Mounting configuration (1 figure)

P : Through Hole Mounting Device
M : Surface Mount Device
S : Bolt-on Device

③ Rated current (3 figures)

Ex)

2R5 : 2.5A **005** : 5A
050 : 50A **500** : 500A
1T0 : 1000A

④ Control power supply type (1 figure)

S : Single supply **D** : Dual supply

⑤ Power supply voltage (2 figures)

15 : 15V **05** : 5V

⑥ Special specification (4 figures_MAX.)

Ex)

Figures	Special specification
B	With a busbar
C	With a cover
J	Connector Maker : JST
M	Connector Maker : Molex
W	Saturation current is increased.
X	Secondary coil :1000 Turns
Z	Secondary coil : 5000 Turns
Y	Secondary coil : 2000 Turns

Important Notice

1. The content of this information is subject to change without prior notice for the purpose of improvements, etc. Ensure that you are in possession of the most up-to-date information when using this product.
2. This product is intended to be used in general electronics applications (electric home appliances, business equipment, information equipment, communication terminal equipment, measuring devices, industrial equipment, and so on). This product is neither intended nor warranted for use in following equipment or devices:
Special application (such as for medical devices, transportation equipment, traffic signal control equipment, fire and crime prevention equipment, aeronautics and space devices, nuclear power control, fuel control, in-vehicle equipment, safety devices, and so on) in which extremely high quality and high reliability is required, or if the malfunction or failures of product could be cause loss of human life, bodily injury.
Tamura Corporation shall not be held responsible for any damage incurred by customers or any third party when products are used in special application, unless specifically permitted in this document.
3. Tamura Corporation constantly strives to improve quality and reliability, but malfunction or failures are bound to occur with some probability in current sensor. To ensure that failures do not cause accidents resulting in injury or death, fire accidents, social damage, and so on, users are to thoroughly verify the safety of their designs in devices and/or systems.
4. The operation examples and circuit examples shown in this information are for reference purposes only, and Tamura Corporation disclaims all responsibility for any violations of industrial property rights, intellectual property rights and any other rights owned by Tamura Corporation or third parties that these may entail.
5. The circuit examples and part constants listed in these specifications are provided as reference for the verification of characteristics. The user is to perform design, verification, and judgment under his or her own responsibility, taking into account the various conditions.
6. The products are designed for use in environments where consumer electronics are commonly used. It is not designed for use in special environments such as listed below, and if such use is considered, the user is to perform thorough safety and reliability checks under his/her responsibility.
7. This product is not designed to resist radiation.
 - Use in liquids such as water, oil, chemical solutions, or organic solvents, and use in locations where the product will be exposed to such liquids.
 - Use that involves exposure to direct sunlight, outdoor exposure, or dusty conditions.
 - Use in locations where corrosive gases such as sea winds, Cl₂, H₂S, NH₃, SO₂, or NO₂, are present. (Some product improves durability)
 - Use in environments with strong static electricity or electromagnetic radiation.
 - Use that involves placing inflammable material next to the product.
 - Use of this product either sealed with a resin filling or coated with resin.
 - Use of water or a water soluble detergent for flux cleaning.
 - Use in locations where condensation is liable to occur.
8. Do not use or otherwise make available the TAMURA products or the technology described in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of mass destruction weapons (e.g. nuclear, chemical, or biological weapons or missile technology products). When exporting and re-exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations including, without limitation, Japan -Foreign Exchange and Foreign Trade Control Law and U.S.-Export Administration Regulations. The TAMURA products and related technology should not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
9. Please contact your TAMURA sales office for details as to environmental matters such as the RoHS compatibility of Product. Please use TAMURA products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TAMURA assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
10. TAMURA assumes no liability for damages or losses incurred by you or third parties as a result of unauthorized use of TAMURA products.
11. This document and any information herein may not be reproduced in whole or in part without prior written permission from TAMURA.

According to UL508 standard and CSA C22.2 No.14 standard

Note

Models F01P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, or L, may be followed by slash and any numbers from 01 through 99 or blank. Models F02P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P0, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank. Models F03P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank.

Power Circuit and Motor-mounted Apparatus - Component UL FILE No.E243511

Series	Model	Requirements Evaluated to (US and/or CN)
F01P	F01P *** S05	USR
F02P	F02P *** S05	USR
F03P	F03P *** S05	USR
L07P	L07P *** D15	USR, CNR
	L07P *** D15S	
	L07P *** S05	
L18P	L18P *** D15	USR, CNR
	L18P *** D15C	
	L18P *** D15-OP	
	L18P *** S05	
	L18P *** S05R	
	L18P *** S12	
	SL18P *** D15	
L31S	L31S *** S05S	USR, CNR
	L31S *** S05FS	USR
L32P	L32P *** S05(B)FS	USR
L34S	L34S *** D15	USR, CNR
L37S	L37S *** D15J L37S *** D15M	USR
S21S	S21S180D15JN	USR, CNR
S22P	S22P *** S05	USR, CNR
	S22P *** S05P	
	S22P *** S05M2	
S23P	S23P50/100D15	USR, CNR
	S23P50/100D15M1	
	S23P50/100D15M2	
S25P	S25P *** D15 *	USR, CNR
S26P	S26P200D15Y	USR, CNR
S27S	S27S300D15Y	USR, CNR
	S27S300D15YM	
S28S	S28S500D24Z	USR
	S28S500D24ZM	
S29S	S29S1T0D24Z	USR
	S29S1T0D24ZM	
	S29S1T0D24ZJ	
F23P	F23P *** S05	USR, CNR
LA02P	LA02P *** S03	USR, CNR
LA03P	LA03P *** S05	USR, CNR

Ratings - Environmental

Series	Model	Environmental	
		Maximum Surrounding Air Temperature rating	Pollution Degree
F01P	F01P *** S05	105°C.	2
F02P	F02P *** S05	105°C.	2
F03P	F03P *** S05	105°C.	2
L07P	L07P *** D15	80°C.	2
	L07P *** D15S		
	L07P *** S05		
L18P	L18P *** D15	80°C.	2
	L18P *** D15C		
	L18P *** D15-OP		
	L18P *** S05		
	L18P *** S05R		
	L18P *** S12		
	SL18P *** D15		
L31S	L31S *** S05S	85°C.	2
	L31S *** S05FS		
L32P	L32P *** S05(B)FS	85°C.	2
L34S	L34S *** D15	80°C.	2
L37S	L37S *** D15J L37S *** D15M	85°C.	2
S21S	S21S180D15JN	80°C.	2
S22P	S22P *** S05	85°C.	2
	S22P *** S05P		
	S22P *** S05M2		
S23P	S23P50/100D15	85°C.	2
	S23P50/100D15M1		
	S23P50/100D15M2		
S25P	S25P *** D15 *	85°C.	2
S26P	S26P200D15Y	85°C.	2
S27S	S27S300D15Y	85°C.	2
	S27S300D15YM		
S28S	S28S500D24Z	70°C.	2
	S28S500D24ZM		
S29S	S29S1T0D24Z	85°C.	2
	S29S1T0D24ZM		
	S29S1T0D24ZJ		
F23P	F23P *** S05	85°C.	2
LA02P	LA02P *** S03	110°C.	2
LA03P	LA03P *** S05	110°C.	2

Note

US indicates United States Standard.
CN indicates Canadian National Standard.

According to UL508 standard and CSA C22.2 No.14 standard

Note

Models F01P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, or L, may be followed by slash and any numbers from 01 through 99 or blank. Models F02P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P0, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank. Models F03P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank.

Ratings - Electrical

Series	Model	Primary (Feed-through)	Secondary (Sensing)	
			Input	Output
F01P	F01P006S05	6 A, 600 Vrms	5 Vdc, 25 mA	2.5 ± 2.2 Vdc, ± 0.5 mA
	F01P015S05	15 A, 600 Vrms	5 Vdc, 30 mA	
	F01P025S05	25 A, 600 Vrms	5 Vdc, 35 mA	
	F01P050S05	50 A, 600 Vrms	5 Vdc, 55 mA	
F02P	F02P006S05	6 A, 600 Vrms	5 Vdc, 25 mA	2.5 ± 2.2 Vdc, ± 0.5 mA
	F02P015S05	15 A, 600 Vrms	5 Vdc, 30 mA	
	F02P025S05	25 A, 600 Vrms	5 Vdc, 35 mA	
	F02P050S05	50 A, 600 Vrms	5 Vdc, 55 mA	
F03P	F03P006S05	6 A, 600 Vrms	5 Vdc, 25 mA	2.5 ± 2.2 Vdc, ± 0.5 mA
	F03P015S05	15 A, 600 Vrms	5 Vdc, 30 mA	
	F03P025S05	25 A, 600 Vrms	5 Vdc, 35 mA	
	F03P050S05	50 A, 600 Vrms	5 Vdc, 55 mA	
L07P	L07P003D15	3 A, 600 Vrms	± 15 Vdc, ± 30 mA	0 – 4 Vdc, 0.4 mA
	L07P003D15S			
	L07P005D15	5 A, 600 Vrms		
	L07P005D15S			
	L07P010D15	10 A, 600 Vrms		
	L07P010D15S			
	L07P015D15	15 A, 600 Vrms		
	L07P015D15S			
	L07P020D15	20 A, 600 Vrms		
	L07P020D15S			
	L07P025D15	25 A, 600 Vrms		
	L07P025D15S			
	L07P030D15	30 A, 600 Vrms		
	L07P030D15S			
	L07P003S05	3 A, 600 Vrms	5 Vdc, 30 mA	0–3.75 Vdc, 0.4 mA
	L07P005S05			
	L07P010S05			
	L07P015S05			
	L07P020S05			
	L07P025S05			
	L07P030S05			
	L07P030S05			
L18P	L18P003D15	3 A, 600 Vrms	± 15 Vdc, ± 15 mA	0–4 Vdc, 0.4 mA
	L18P005D15	5 A, 600 Vrms		
	L18P010D15	10 A, 600 Vrms		
	L18P015D15	15 A, 600 Vrms		
	L18P020D15	20 A, 600 Vrms		
	L18P025D15	25 A, 600 Vrms		
	L18P030D15	30 A, 600 Vrms		
	L18P040D15	40 A, 600 Vrms		
	L18P050D15	50 A, 600 Vrms		
L18P060D15	60 A, 600 Vrms			

Note

US indicates United States Standard.
CN indicates Canadian National Standard.

Ratings - Electrical

Series	Model	Primary (Feed-through)	Secondary (Sensing)	
			Input	Output
L18P	L18P003D15C	3 A, 600 Vrms	± 15 Vdc, ± 15 mA	0 - 4 Vdc, 0.4 mA
	L18P005D15C	5 A, 600 Vrms		
	L18P010D15C	10 A, 600 Vrms		
	L18P015D15C	15 A, 600 Vrms		
	L18P020D15C	20 A, 600 Vrms		
	L18P025D15C	25 A, 600 Vrms		
	L18P030D15C	30 A, 600 Vrms		
	L18P040D15C	40 A, 600 Vrms		
	L18P050D15C	50 A, 600 Vrms		
	L18P060D15C	60 A, 600 Vrms		
L18P	L18P003D15-OP	3 A, 600 Vrms	± 15 Vdc, ± 15 mA	0 - 4 Vdc, 0.4 mA
	L18P005D15-OP	5 A, 600 Vrms		
	L18P010D15-OP	10 A, 600 Vrms		
	L18P015D15-OP	15 A, 600 Vrms		
	L18P020D15-OP	20 A, 600 Vrms		
	L18P025D15-OP	25 A, 600 Vrms		
	L18P030D15-OP	30 A, 600 Vrms		
	L18P040D15-OP	40 A, 600 Vrms		
	L18P050D15-OP	50 A, 600 Vrms		
	L18P060D15-OP	60 A, 600 Vrms		
L18P	L18P003S05	3 A, 600 Vrms	5 Vdc, 15 mA	0 - 4 Vdc, 0.4 mA
	L18P005S05	5 A, 600 Vrms		
	L18P010S05	10 A, 600 Vrms		
	L18P015S05	15 A, 600 Vrms		
	L18P020S05	20 A, 600 Vrms		
	L18P025S05	25 A, 600 Vrms		
	L18P030S05	30 A, 600 Vrms		
	L18P040S05	40 A, 600 Vrms		
	L18P050S05	50 A, 600 Vrms		
	L18P060S05	60 A, 600 Vrms		
L18P	L18P003S05R	3 A, 600 Vrms	5 Vdc, 15 mA	0 - 3.2 Vdc, 0.32 mA
	L18P005S05R	5 A, 600 Vrms		
	L18P010S05R	10 A, 600 Vrms		
	L18P015S05R	15 A, 600 Vrms		
	L18P020S05R	20 A, 600 Vrms		
	L18P025S05R	25 A, 600 Vrms		
	L18P030S05R	30 A, 600 Vrms		
	L18P040S05R	40 A, 600 Vrms		
	L18P050S05R	50 A, 600 Vrms		
	L18P060S05R	60 A, 600 Vrms		

According to UL508 standard and CSA C22.2 No.14 standard

Ratings - Electrical

Series	Model	Primary (Feed-through)	Secondary (Sensing)	
			Input	Output
L18P	L18P003S12	3 A, 600 Vrms	12 Vdc, 15 mA	0 – 4 Vdc, 0.4 mA
	L18P005S12	5 A, 600 Vrms		
	L18P010S12	10 A, 600 Vrms		
	L18P015S12	15 A, 600 Vrms		
	L18P020S12	20 A, 600 Vrms		
	L18P025S12	25 A, 600 Vrms		
	L18P030S12	30 A, 600 Vrms		
	L18P040S12	40 A, 600 Vrms		
	L18P050S12	50 A, 600 Vrms		
	L18P060S12	60 A, 600 Vrms		
L18P	SL18P003D15	3 A, 600 Vrms	± 15 Vdc, ± 15 mA	0 – 4 Vdc, 0.4 mA
	SL18P005D15	5 A, 600 Vrms		
	SL18P010D15	10 A, 600 Vrms		
	SL18P015D15	15 A, 600 Vrms		
	SL18P020D15	20 A, 600 Vrms		
	SL18P025D15	25 A, 600 Vrms		
	SL18P030D15	30 A, 600 Vrms		
	SL18P040D15	40 A, 600 Vrms		
	SL18P050D15	50 A, 600 Vrms		
	SL18P060D15	60 A, 600 Vrms		
L31S	L31S050S05S	50 A, 600 Vrms	5 Vdc, 15 mA	1.875 – 3.125 Vdc, 0.3125 mA
	L31S050S05FS			
	L31S100S05S	100 A, 600 Vrms		
	L31S100S05FS			
	L31S200S05S	200 A, 600 Vrms		
	L31S200S05FS			
	L31S300S05S	300 A, 600 Vrms		
	L31S300S05FS			
	L31S400S05S	400 A, 600 Vrms		
	L31S400S05FS			
	L31S500S05S	500 A, 600 Vrms		
	L31S500S05FS			
	L31S600S05S	600 A, 600 Vrms		
	L31S600S05FS			
L32P	L32P050S05FS	50 A, 600 Vrms	5 Vdc, 15 mA	1.875 – 3.125 Vdc, 0.3125 mA
	L32S050S05BFS			
	L32P100S05FS	100 A, 600 Vrms		
	L32P100S05BFS			
	L32P150S05FS	150 A, 600 Vrms		
	L32P200S05FS	200 A, 600 Vrms		
	L32P300S05FS	300 A, 600 Vrms		
	L32P400S05FS	400 A, 600 Vrms		
L34S	L34S200D15	200 A, 600 Vrms	± 15 Vdc, ± 25mA	0 – 4 Vdc, 0.4 mA
	L34S300D15	300 A, 600 Vrms		
	L34S400D15	400 A, 600 Vrms		
	L34S500D15	500 A, 600 Vrms		
	L34S600D15	600 A, 600 Vrms		
	L34S1T0D15	1000 A, 600 Vrms		
	L34S1T2D15	1200 A, 600 Vrms		
	L34S1T5D15	1500 A, 600 Vrms		

Ratings - Electrical

Series	Model	Primary (Feed-through)	Secondary (Sensing)	
			Input	Output
L37S	L37S050D15J L37S050D15M	50 A, 600 Vrms	± 15 Vdc, ± 25mA	0 – 4 Vdc, 0.4 mA
	L37S100D15J L37S100D15M	100 A, 600 Vrms		
	L37S200D15J L37S200D15M	200 A, 600 Vrms		
	L37S300D15J L37S300D15M	300 A, 600 Vrms		
	L37S400D15J L37S400D15M	400 A, 600 Vrms		
	L37S500D15J L37S500D15M	500 A, 600 Vrms		
	L37S600D15J L37S600D15M	600 A, 600 Vrms		
S21S	S21S180D15JN	180 A, 600 Vrms	± 15 Vdc, ± 25mA	0 – 1.35 Vdc, 45mA
S22P	S22P006S05	6 A, 600 Vrms	5 Vdc, 12.5 mA	0 – 3.125 Vdc, 3mA
	S22P006S05P			
	S22P006S05M2			
	S22P015S05	15 A, 600 Vrms		0 – 3.125 Vdc, 7.5mA
	S22P015S05P			
	S22P015S05M2			
	S22P025S05	25 A, 600 Vrms		0 – 3.125 Vdc, 12.5mA
	S22P025S05P			
S22P025S05M2				
S23P	S23P50/100D15	100 A, 600 Vrms	MAX. ± 15 Vdc, ± 62.5 mA	-2.5 – 2.5 Vdc; -50 – 50mA
	S23P50/100D15M1	100 A, 600 Vrms	MAX. ± 15 Vdc, ± 112.5 mA	-5 – 5 Vdc; -100 – 100mA
	S23P50/100D15M2	100 A, 600 Vrms	MAX. ± 15 Vdc, ± 62.5 mA	-2.5 – 2.5 Vdc; -50 – 50mA
S25P	S25P050D15X	50 A, 600 Vrms	MAX. ± 15 Vdc, ± 62.5 mA	-5 – 5 Vdc; -50 – 50mA
	S25P100D15X	100 A, 600 Vrms	MAX. ± 15 Vdc, ± 112.5 mA	-5 – 5 Vdc; -100 -100mA
	S25P100D15Y	100 A, 600 Vrms	MAX. ± 15 Vdc, ± 62.5 mA	-5 – 5 Vdc; -50 – 50mA
	S25P150D15Y	150 A, 600 Vrms	MAX. ± 15 Vdc, ± 87.5 mA	-3.75 – 3.75 Vdc; -75 – 75mA
S26P	S26P200D15Y	200 A, 600 Vrms	MAX. ± 15 Vdc, ± 112.5 mA	-5 – 5 Vdc; -100 – 100mA
S27S	S27S300D15Y	300 A, 600 Vrms	± 15 Vdc, ± 162.5 mA	0 – ± 7.5 Vdc, ± 150mA
	S27S300D15YM	300 A, 600 Vrms		
S28S	S28S500D24Z	500 A, 600 Vrms	± 24 Vdc, ± 130 mA	0 – ± 5 Vdc, ± 100mA
	S28S500D24ZM	500 A, 600 Vrms		
S29S	S28S1T2D24Z	1000 A, 600 Vrms	± 24 Vdc, ± 235 mA	0 – ± 10 Vdc, ± 200mA
	S29S1T2D24ZM	1000 A, 600 Vrms		
	S29S1T2D24ZJ	1000 A, 600 Vrms		
F23P	F23P050S05	50 A, 600 Vrms	5 Vdc, 55mA	2.5 ± 2.2 Vdc, ± 0.5mA
	F23P100S05	100 A, 600 Vrms	5 Vdc, 110mA	
LA02P	LA02P021S03 LA02P035S03 LA02P054S03 LA02P085S03	50 A, 480 Vac	3.3Vdc, 0.5mA	3.3Vdc, 0.5mA
LA03P	LA03P021S05 LA03P035S05 LA03P054S05 LA03P085S05	50 A, 480 Vac	5Vdc, 0.5mA	5Vdc, 0.5mA

According to UL508 standard and CSA C22.2 No.14 standard

Note

Models F01P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, or L, may be followed by slash and any numbers from 01 through 99 or blank. Models F02P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P0, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank. Models F03P; followed by 006, 015, 025 or 050, followed by S05, may be followed by D, L, -P1, -P2, -P3, -P4, -P5, -P6, -P7, -P8, -P9, -PA, -PB, -PC, -PD, -PE or -PF, may be followed by slash and any numbers from 01 through 99 or blank.

CAUTION

The descriptions are directed from UL.

Series	Model	CAUTION / Notice
F01P	F01P *** S05	- / Notice : The maximum temperature at top of case shall not be higher than 110° C and busbar shall not be higher than 108° C in the end-use product.
F02P	F02P *** S05	
F03P	F03P *** S05	
L07P	L07P *** D15	- / -
	L07P *** D15S	
	L07P *** S05	
L18P	L18P *** D15	- / -
	L18P *** D15C	
	L18P *** D15-OP	
	L18P *** S05	
	L18P *** S05R	
	L18P *** S12	
	SL18P *** D15	
L31S	L31S *** S05S	- / Notice : Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings.
	L31S *** S05FS	
L32P	L32P *** S05(B)FS	- / Notice : Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings. The maximum temperature at case should not exceed 150°C by the case's insulation performance.
L34S	L34S *** D15	CAUTION : Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings. / -
L37S	L37S *** D15J L37S *** D15M	- / Notice: The maximum temperature of busbar shall not be higher than 102.3°C respectively at the end-use application.
S21S	S21S180D15JN	CAUTION : Do not wrap the primary conductor around the core part of the product to increase measured current. / -
S22P	S22P *** S05	- / -
	S22P *** S05P	
	S22P *** S05M2	
S23P	S23P50/100D15	CAUTION : Provide two min. 100 by 85 mm, 0.5mm thick copper conductor-cum- heat sink as primary conductor of each side for safe usage. / Notice : The primary conductor temperature and PCB should not exceed 100°C by the temperature regulations of internal parts.
	S23P50/100D15M1	
	S23P50/100D15M2	
S25P	S25P *** D15 *	CAUTION : Do not wrap the primary conductor around the core part of the product to increase measured current. / -

CAUTION

The descriptions are directed from UL.

Series	Model	CAUTION / Notice
S26P	S26P200D15Y	CAUTION: Do not wrap the primary conductor around the core part of the product to increase measured current. / -
S27S	S27S300D15Y	- / Notice: Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings.
	S27S300D15YM	
S28S	S28S500D24Z	- / Notice: Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings. The maximum temperature at case should not exceed 140°C by the case's insulation performance.
	S28S500D24ZM	
S29S	S29S1T0D24Z	- / Notice: Do not wrap the primary conductor around the core part of the product for preventing to reduce the required Spacings. The primary conductor temperature should not exceed 95°C by the temperature regulations of internal parts.
	S29S1T0D24ZM	
	S29S1T0D24ZJ	
F23P	F23P *** S05	Notice: The devices have been evaluated with the provision of the two copper conductor-cum-heat sink as the primary conductor, measured 100 by 85 mm, 0.5 mm thick.
LA02P	LA02P *** S03	- / -
LA03P	LA03P *** S05	- / -

Note

US indicates United States Standard.
CN indicates Canadian National Standard.

Fluxgate system / Voltage-output type, Anti-Surge current, Compact


F01P S05L, F02P S05L, F03P S05L SERIES



F01PxxxS05L



F02PxxxS05L



F03PxxxS05L



RoHS

- Backward compatible to F01PxxxS05, F02PxxxS05, F03PxxxS05 Series.
- Anti-Surge current (4kAT, 8/20uS, single)
- Mounting area reduced, however, pin compatibility. Longitudinal dimension reduced.
- Super precision & High stability (Low temperature drift) .
- Unipolar power voltage; +5V. Rated Current; 6 ~ 50A. Multi-range models. MAX_Temp.105°C . Voltage-output type.
- F01PxxxS05L series are designed by the pin compatibility as high-end models of S22PxxxS05M2 series.

Comparison of the main features

Series	Features
F01PxxxS05L	Without reference access.
F02PxxxS05L	With reference access, Ref_in / Ref_out.
F03PxxxS05L	With reference access, Ref_in / Ref_out. Higher creepage and clearance distances.


***: Rated Current symbol

SPECIFICATIONS

Spec	Types	Value		
		F01PxxxS05L	F02PxxxS05L	F03PxxxS05L
Maximum peak current		4kAT (2kA × 2. Number of primary turns is two turns.)		
Rated Current If (xxx: Rated Current symbol)		6A (006) / 15A (015) / 25A (025) / 50A (050)		
Maximum current (At Vcc=+5V, Ta=+105°C)		± 20A (If=6A) / ± 51A (If=15A) / ± 85A (If=25A) / ± 150A (If=50A)		
Existence of reference access		No	Yes	
Number of primary busbar		3pcs		4pcs
Clearance distance, Primary ↔ Secondary		7.7mm	7.5mm	8.2mm
STANDARDS		UL508 (file No. E243511), EN50178, EN61010-1, EN60950-1		
Ambient operating temperature		− 40°C ~ +105°C		

Mounting area

The mounting area has been reduced more than the F01P / F02P / F03PxxxS05 series. However, the F01P / F02P / F03PxxxS05L series series are 100% compatible with the F01P / F02P / F03PxxxS05series in regards to the footprint mounting.

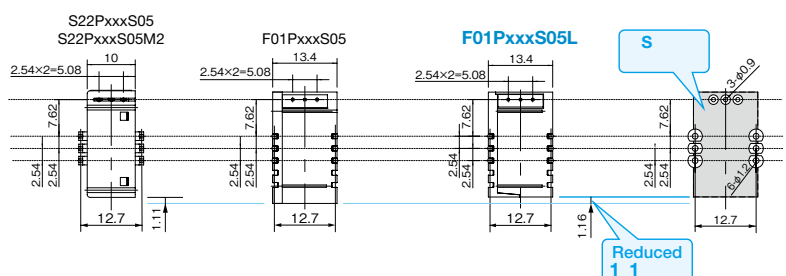

The F02P/F03PxxxS05L series also similarly reduces the mounting area.

The above-mentioned comparison tables are the auxiliary data for understanding each series. For details, please confirm the next page or subsequent ones. >>>

Fluxgate system / Voltage-output type Anti-Surge current, Compact size

F01P L SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V _{CC}	V	7	
Primary conductor temperature	—	°C	110	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω
Maximum peak current	—	kAT	4	Current waveform : • Front time 8μs • Time to half value 20μs • single

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V _d	—	AC4200V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	d _{CI}	—	7.7mm (TYP)	Primary ⇔ Secondary
Creepage distance	d _{CP}	—	7.7mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178, EN61010
	—	—	600V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178, EN61010

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T _a	°C	− 40		+ 105	
Ambient storage temperature	T _S	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F01P006S05L	If	A		6		
	F01P015S05L				15		
	F01P025S05L				25		
	F01P050S05L				50		
Maximum current (at Vcc= + 5V, Ta= + 105°C)	F01P006S05L	I _{pmax}	A	− 20		20	
	F01P015S05L			− 51		51	
	F01P025S05L			− 85		85	
	F01P050S05L			− 150		150	
Supply Voltage		V _{cc}	V	4.75	5.00	5.25	
Number of primary turns		N _p	T	1, 2, 3			
Number of secondary turns	F01P006S05L	N _s	T		1816		
	F01P015S05L				1737		
	F01P025S05L				1764		
	F01P050S05L				1600		
Consumption current (at If)	F01P006S05L	I _{cc}	mA		25		I _{cc} =15 + I _p (mA) / N _s
	F01P015S05L				30		
	F01P025S05L				35		
	F01P050S05L				55		
Output voltage		V _o	V	0.375		4.625	
Output voltage (at I _p =0A)		V _o	V		2.5		
Electrical offset voltage * 1	F01P006S05L	V _{oe}	mV	− 10.40		10.40	
	F01P015S05L			− 7.10		7.10	
	F01P025S05L			− 6.25		6.25	
	F01P050S05L			− 5.80		5.80	
Electrical offset current referred to primary	F01P006S05L	I _{oe}	A	− 0.10		0.10	
	F01P015S05L			− 0.17		0.17	
	F01P025S05L			− 0.25		0.25	
	F01P050S05L			− 0.46		0.46	
Temperature coefficient of Output voltage (at I _p =0A)	F01P006S05L	TCV _o	ppm/K		± 10.0	± 80.0	ppm/K of 2.5V (− 40°C~+ 105°C)
	F01P015S05L				± 7.5	± 70.0	
	F01P025S05L				± 6.5	± 60.0	
	F01P050S05L				± 6.0	± 60.0	
Sensitivity (Theoretical value)	F01P006S05L	G _{th}	mV/A		104.2		625mV/If
	F01P015S05L				41.67		
	F01P025S05L				25		
	F01P050S05L				12.5		
Sensitivity error		ε _G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta= − 40°C~+ 105°C)		TCG	ppm/K			± 40	
Output Linearity		ε _L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		I _{OM}	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)	F01P006S05L	I _{no}	μA/ (Hz) ^{1/2}		36		RL=1k Ω
	F01P015S05L				90		
	F01P025S05L				150		
	F01P050S05L				300		

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f typ =450kHz)	F01P006S05L	—	mV	40	160	RL=1k Ω
	F01P015S05L			15	60	
	F01P025S05L			10	40	
	F01P050S05L			5	20	
Reaction time (at 10% of If)	F01P006S05L	tra	μs		0.3	RL=1k Ω, di/dt=18A/μs
	F01P015S05L				0.3	RL=1k Ω, di/dt=44A/μs
	F01P025S05L				0.3	RL=1k Ω, di/dt=68A/μs
	F01P050S05L				0.3	RL=1k Ω, di/dt=100A/μs
Response time 1 (at 90% of If)	F01P006S05L	tr	μs		0.3	RL=1k Ω, di/dt=18A/μs
	F01P015S05L				0.3	RL=1k Ω, di/dt=44A/μs
	F01P025S05L				0.3	RL=1k Ω, di/dt=68A/μs
	F01P050S05L				0.3	RL=1k Ω, di/dt=100A/μs
Response time 2 (at 10% of If to 90% of Vo)	tr	μs			0.6	RL=1k Ω, di/dt=If/μs
Frequency bandwidth (± 1dB)	BW	kHz	200			RL=1k Ω
Frequency bandwidth (± 3dB)	BW	kHz	300			RL=1k Ω
Output Voltage Accuracy (Overall)	F01P006S05L	X _G	%		2.5	X _G = (100 × V _{oe} /625) + ε _G + ε _L
	F01P015S05L				1.9	
	F01P025S05L				1.8	
	F01P050S05L				1.7	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No.E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve TYP

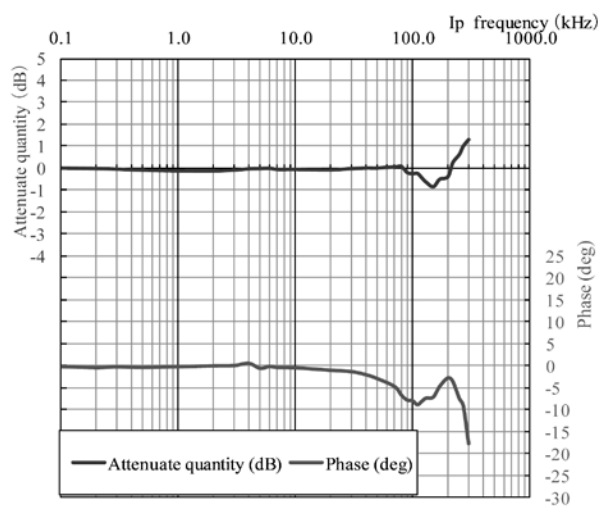
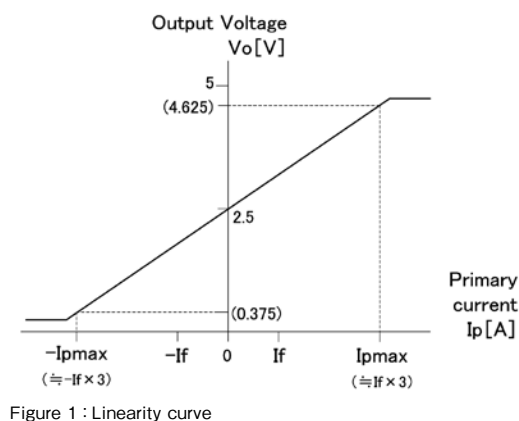


Figure 2 : Frequency response curve

ex) F01P025S05L

Measurement condition Ta=+25°C, RL=1k Ω, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

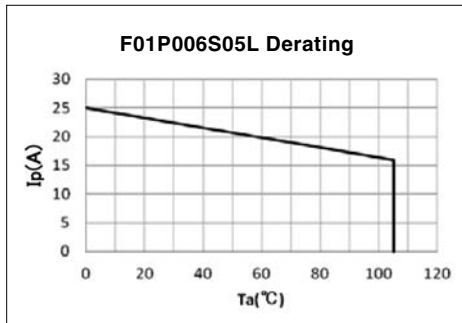


Figure 3 : Ip vs Ta for F01P006S05L

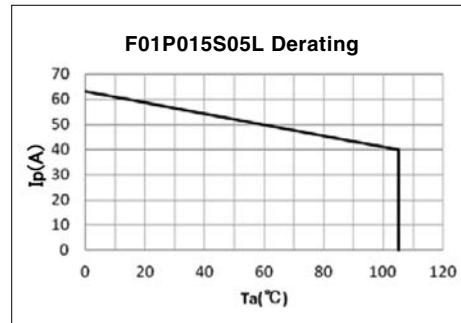


Figure 4 : Ip vs Ta for F01P015S05L

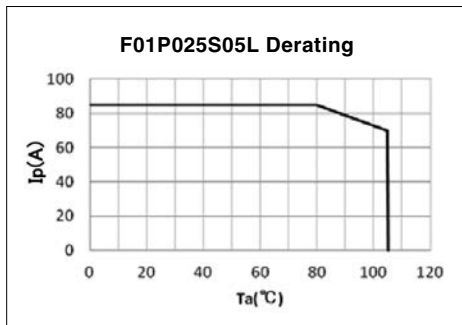


Figure 5 : Ip vs Ta for F01P025S05L

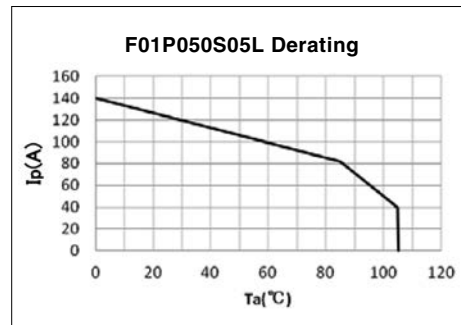


Figure 6 : Ip vs Ta for F01P050S05L

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^\circ\text{C}$
- ③ Primary conductor temperature $< 110^\circ\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating






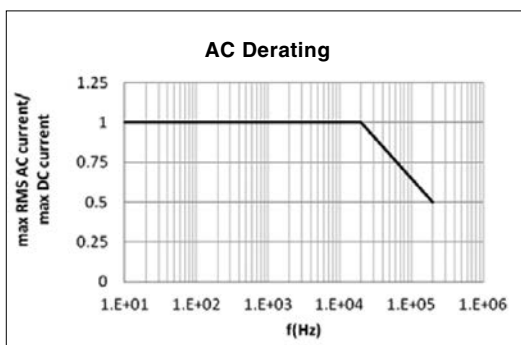


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency



CURRENT SENSORS

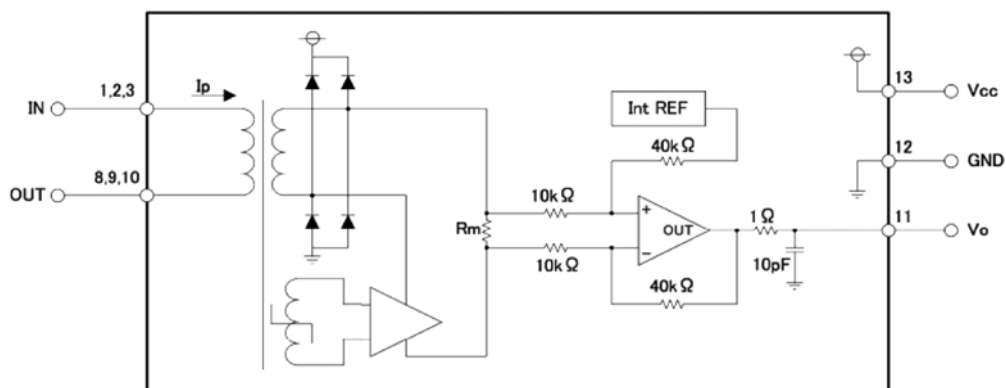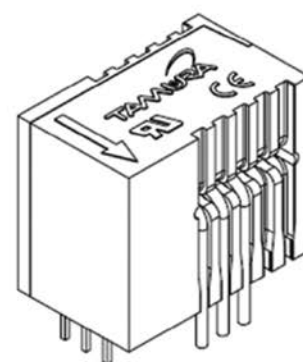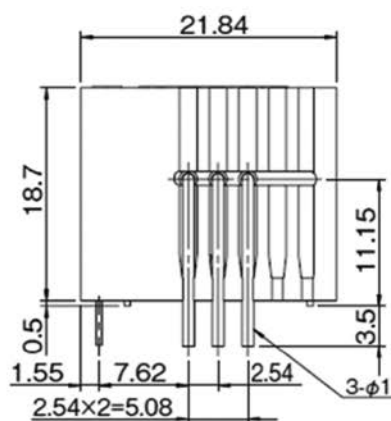


DIMENSIONS (mm)

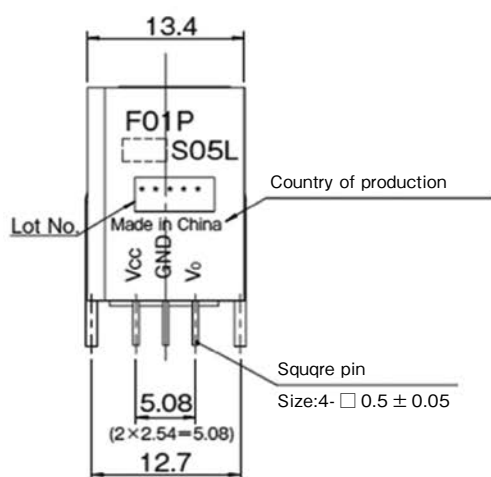

Terminal number	Note
① Input	1. Unless otherwise specified, tolerances shall be $\pm 0.25\text{mm}$
② Input	
③ Input	2. Unit is [mm]
④ —	
⑤ —	⑪ Vo
⑥ —	⑫ GND
⑦ —	⑬ Vcc



RECOMMENDED HOLE DIAMETER (mm)

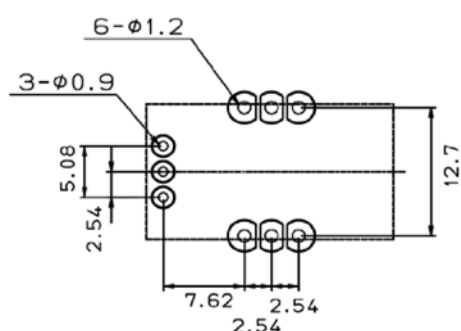


Identification marking

The top side of product is marked for identification with the previous model.

Rated current 6A ... Blue color
 Rated current 15A ... White color
 Rated current 25A ... Orange color
 Rated current 50A ... Green color

Ex) Marking example



↑ Mark shape : L

Fluxgate system / Voltage-output type Anti-Surge current, Compact size

F02P L SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	Vcc	V	7	
Primary conductor temperature	—	°C	110	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω
Maximum peak current	—	kAT	4	Current waveform : • Front time 8μs • Time to half value 20μs • single

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	Vd	—	AC4100V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	dCi	—	7.5mm (TYP)	Primary ⇔ Secondary
Creepage distance	dCp	—	7.5mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index: (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178, EN61010
	—	—	600V, CAT III, PD2	Simple isolation, non uniform field according to EN50178, EN61010

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	Ta	°C	− 40		+ 105	
Ambient storage temperature	T _S	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10k Ω, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F02P006S05L	If	A		6		
	F02P015S05L				15		
	F02P025S05L				25		
	F02P050S05L				50		
Maximum current (at Vcc= + 5V, Ta= + 105°C)	F02P006S05L	I _{pmax}	A	− 20		20	
	F02P015S05L			− 51		51	
	F02P025S05L			− 85		85	
	F02P050S05L			− 150		150	
Supply Voltage		Vcc	V	4.75	5.00	5.25	
Number of primary turns		Np	T	1, 2, 3			
Number of secondary turns	F02P006S05L	Ns	T		1816		
	F02P015S05L				1737		
	F02P025S05L				1764		
	F02P050S05L				1600		
Consumption current (at If)	F02P006S05L	I _{cc}	mA		25		I _{cc} =15 + I _p (mA) / Ns
	F02P015S05L				30		
	F02P025S05L				35		
	F02P050S05L				55		
Internal reference voltage (at I _p =0A)		V _{ref1}	V	2.495	2.500	2.505	Ref OUT mode
External reference voltage		V _{ref2}	V	0		4	Ref IN mode
Output voltage		V _o	V	0.375		4.625	
Output voltage (at I _p =0A)		V _o	V		V _{ref1} , V _{ref2}		
Electrical offset voltage * 1	F02P006S05L	V _{oe}	mV	− 5.300		5.300	
	F02P015S05L			− 2.210		2.210	
	F02P025S05L			− 1.350		1.350	
	F02P050S05L			− 0.725		0.725	
Electrical offset current referred to primary	F02P006S05L	I _{oe}	mA	− 51		51	
	F02P015S05L			− 53		53	
	F02P025S05L			− 54		54	
	F02P050S05L			− 58		58	
Temperature coefficient of Internal reference voltage		TCV _{ref1}	ppm/K		± 5.0	± 50	
Temperature coefficient of Output voltage (at I _p =0A)	F02P006S05L	TCV _o	ppm/K		± 6.0	± 14	ppm/K of 2.5V (− 40°C~+ 105°C)
	F02P015S05L				± 2.3	± 6	
	F02P025S05L				± 1.4	± 4	
	F02P050S05L				± 0.7	± 3	
Sensitivity (Theoretical value)	F02P006S05L	G _{th}	mV/A		104.2		625mV/If
	F02P015S05L				41.67		
	F02P025S05L				25		
	F02P050S05L				12.5		
Sensitivity error		ε _G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta= − 40°C~+ 105°C)		TCG	ppm/K			± 40	
Output Linearity		ε _L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		I _{OM}	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)		I _{no}	μA/(Hz) ^{1/2}		20		RL=1k Ω

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f _{typ} = 450kHz)	F02P006S05L	—	mV	40	160	RL=1kΩ
	F02P015S05L			15	60	
	F02P025S05L			10	40	
	F02P050S05L			5	20	
Reaction time (at 10% of I _f)	F02P006S05L	tra	μs		0.3	RL=1kΩ, di/dt=18A/μs
	F02P015S05L				0.3	RL=1kΩ, di/dt=44A/μs
	F02P025S05L				0.3	RL=1kΩ, di/dt=68A/μs
	F02P050S05L				0.3	RL=1kΩ, di/dt=100A/μs
Response time 1 (at 90% of I _f)	F02P006S05L	tr	μs		0.3	RL=1kΩ, di/dt=18A/μs
	F02P015S05L				0.3	RL=1kΩ, di/dt=44A/μs
	F02P025S05L				0.3	RL=1kΩ, di/dt=68A/μs
	F02P050S05L				0.3	RL=1kΩ, di/dt=100A/μs
Response time 2 (at 10% of I _f to 90% of V _o)	tr	μs			0.6	RL=1kΩ, di/dt=I _f /μs
Frequency bandwidth (± 1dB)	BW	kHz	200			RL=1kΩ
Frequency bandwidth (± 3dB)	BW	kHz	300			RL=1kΩ
Output Voltage Accuracy (Overall)	F02P006S05L	X _G	%		1.7	X _G = (100 × V _{oe} /625) + ε _G + ε _L
	F02P015S05L				1.2	
	F02P025S05L				1.0	
	F02P050S05L				0.9	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No. E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

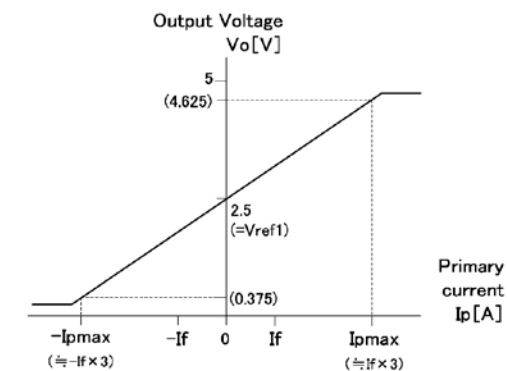


Figure 1 : Linearity curve (Internal reference voltage)

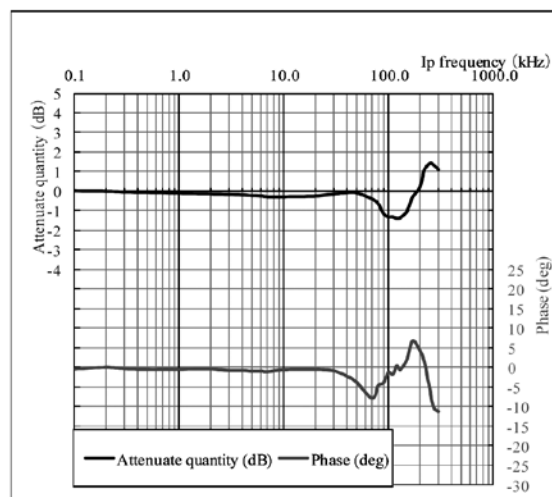


Figure 2 : Frequency response curve

ex) F02P025S05L

Measurement condition Ta=+25°C, RL=1kΩ, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

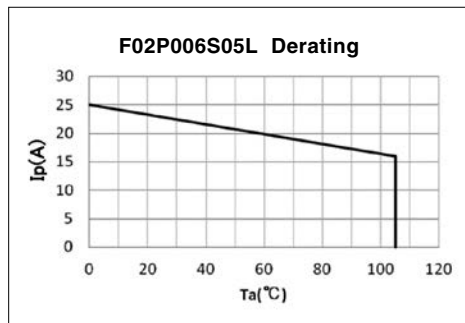


Figure 3 : Ip vs Ta for F02P006S05L

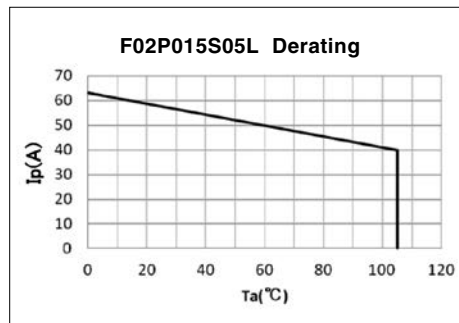


Figure 4 : Ip vs Ta for F02P015S05L

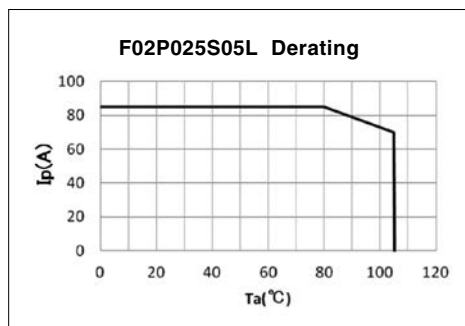


Figure 5 : Ip vs Ta for F02P025S05L

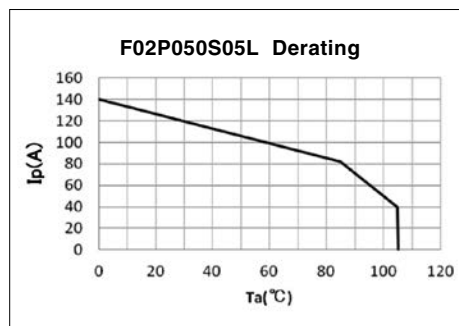


Figure 6 : Ip vs Ta for F02P050S05L

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^{\circ}\text{C}$
- ③ Primary conductor temperature $< 110^{\circ}\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

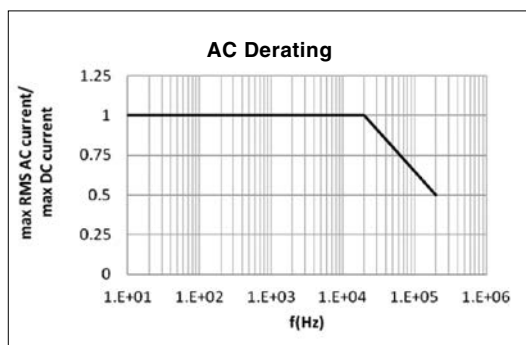


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency

Reference voltage

The Ref pin has two modes Ref IN and Ref OUT :

< Ref OUT mode >


The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurements;

< Ref IN mode >

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V , its voltage is used as the reference voltage at the time of measurement.


- either to source a typical current of $(V_{ref} - 2.5) / 680$, the maximum value will be 2.2mA typ.when $V_{ref2} = 4V$.
- or to sink a typical current of $(2.5 - V_{ref2}) / 680$, the maximum value will be 3.68mA typ.when $V_{ref2} = 0V$.

The following graphs show how the measuring range of each transducer version depends on external reference voltage value V_{ref2} .

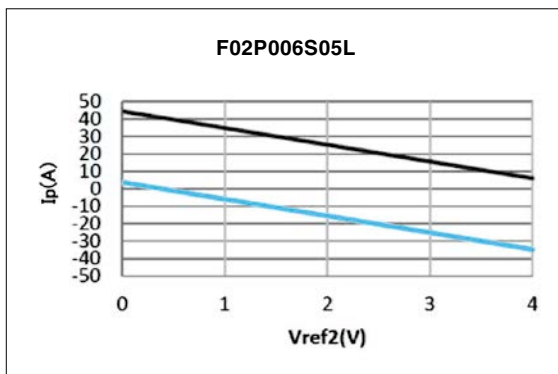


Upper limit : $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2} = 0...4V$)


Lower limit : $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2} = 0...4V$)

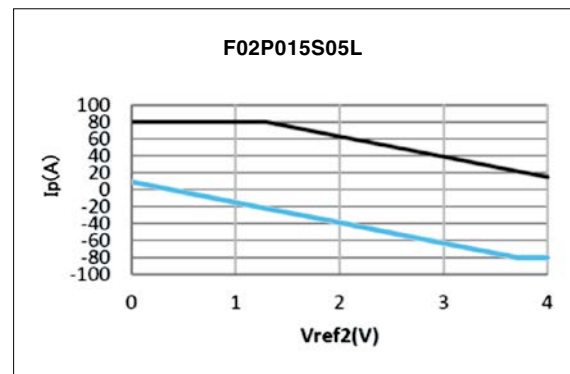

Upper limit : $I_p = 80$ ($V_{ref2} = 0...1.29V$)
 $I_p = -24 \times V_{ref2} + 111$ ($V_{ref2} = 1.29...4V$)
 Lower limit : $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2} = 0...3.7V$)
 $I_p = -80$ ($V_{ref2} = 3.7...4V$)

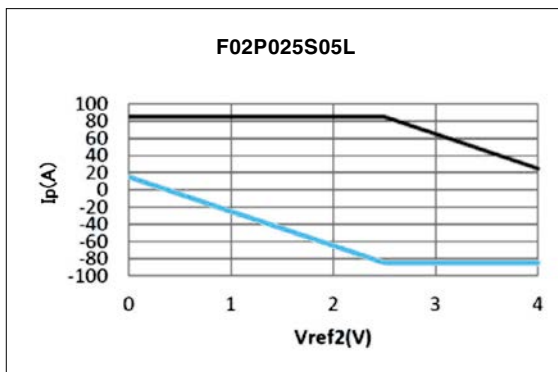



Upper limit : $I_p = 85$ ($V_{ref2} = 0...2.5V$)
 $I_p = -40 \times V_{ref2} + 185$ ($V_{ref2} = 2.5...4V$)
 Lower limit : $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2} = 0...2.5V$)
 $I_p = -85$ ($V_{ref2} = 2.5...4V$)

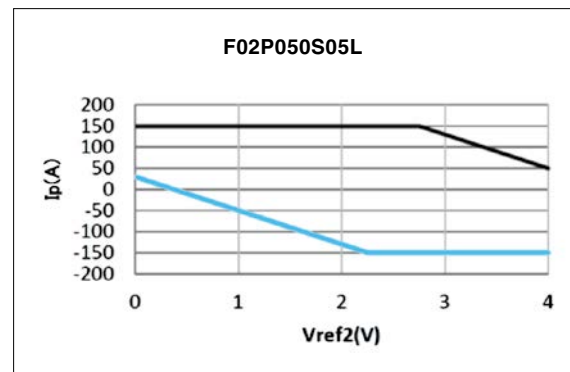






Upper limit : $I_p = 150$ ($V_{ref2} = 0...2.75V$)
 $I_p = -80 \times V_{ref2} + 370$ ($V_{ref2} = 2.75...4V$)
 Lower limit : $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2} = 0...2.25V$)
 $I_p = -150$ ($V_{ref2} = 2.25...4V$)

If you do not want to use the Ref pin, please unconnected.

DIMENSIONS (mm)

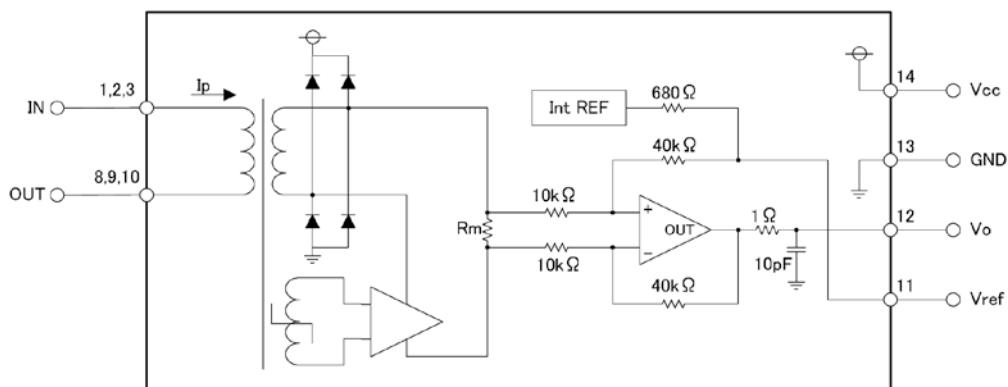


DIMENSIONS (mm)

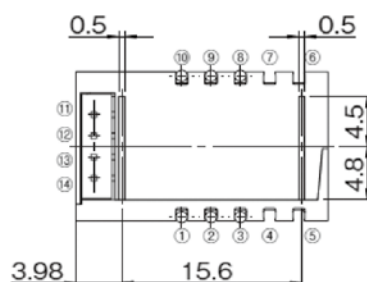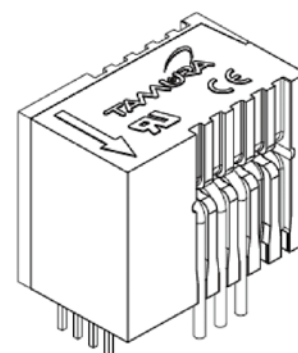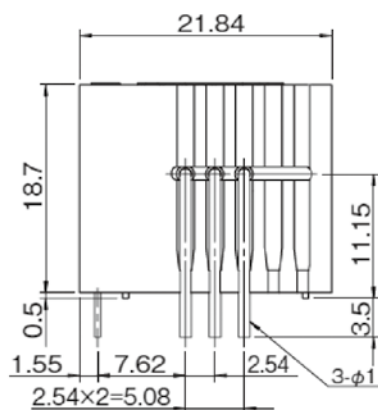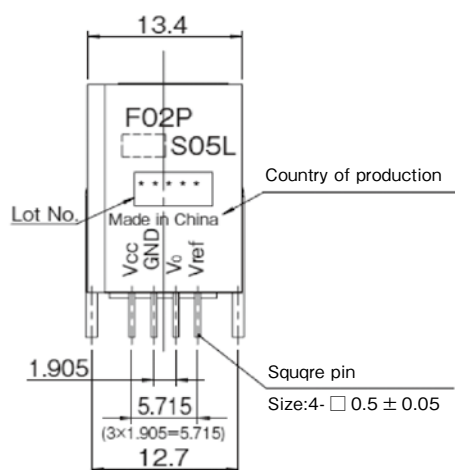

Terminal number	Note
① Input	1. Unless otherwise specified, tolerances shall be $\pm 0.25\text{mm}$ 2. Unit is [mm]
② Input	
③ Input	
④ —	
⑤ —	
⑥ —	
⑦ —	
⑧ Output	
⑨ Output	
⑩ Output	
⑪ Vref	
⑫ Vo	
⑬ GND	
⑭ Vcc	

RECOMMENDED HOLE DIAMETER (mm)

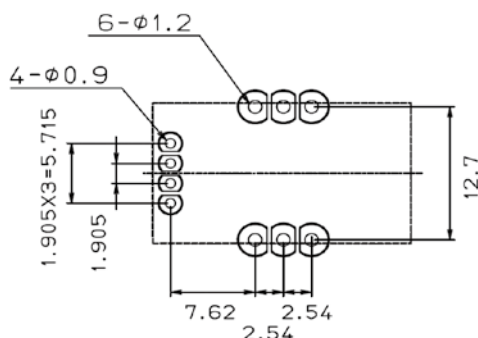

Identification marking

The top side of product is marked for identification with the previous model.

Rated current 6A ... Blue color
Rated current 15A ... White color
Rated current 25A ... Orange color
Rated current 50A ... Green color


Ex) Marking exeample



↑ Mark shape : L

Fluxgate system / Voltage-output type Anti-Surge current, Compact size

F03P L SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	Vcc	V	7	
Primary conductor temperature	—	°C	110	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω
Maximum peak current	—	kAT	4	Current waveform : • Front time 8μs • Time to half value 20μs • single

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	Vd	—	AC4300V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	dCi	—	8.2mm (TYP)	Primary ⇔ Secondary
Creepage distance	dCp	—	8.2mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN61010
	—	—	600V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178
	—	—	1000V, CAT III, PD2	Simple isolation, non uniform field according to EN50178

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	Ta	°C	− 40		+ 105	
Ambient storage temperature	T _s	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F03P006S05L	If	A		6		
	F03P015S05L				15		
	F03P025S05L				25		
	F03P050S05L				50		
Maximum current	F03P006S05L	I _{pmax}	A	− 20		20	
	F03P015S05L			− 51		51	
	F03P025S05L			− 85		85	
	F03P050S05L			− 150		150	
Supply Voltage		V _{cc}	V	4.75	5.00	5.25	
Number of primary turns		N _p	T	1, 2, 3, 4			
Number of secondary turns	F03P006S05L	N _s	T		1816		
	F03P015S05L				1737		
	F03P025S05L				1764		
	F03P050S05L				1600		
Consumption current (at If)	F03P006S05L	I _{cc}	mA		25		I _{cc} = 15 + I _p (mA) / N _s
	F03P015S05L				30		
	F03P025S05L				35		
	F03P050S05L				55		
Internal reference voltage (at I _p = 0A)		V _{ref1}	V	2.495	2.500	2.505	Ref OUT mode
External reference voltage		V _{ref2}	V	0		4	Ref IN mode
Output voltage		V _o	V	0.375		4.625	
Output voltage (at I _p = 0A)		V _o	V		V _{ref1} , V _{ref2}		
Electrical offset voltage * 1	F03P006S05L	V _{oe}	mV	− 5.300		5.300	
	F03P015S05L			− 2.210		2.210	
	F03P025S05L			− 1.350		1.350	
	F03P050S05L			− 0.725		0.725	
Electrical offset current referred to primary	F03P006S05L	I _{oe}	mA	− 51		51	
	F03P015S05L			− 53		53	
	F03P025S05L			− 54		54	
	F03P050S05L			− 58		58	
Temperature coefficient of Internal reference voltage		TCV _{ref1}	ppm/K		± 5.0	± 50	
Temperature coefficient of Output voltage (at I _p = 0A)	F03P006S05L	TCV _o	ppm/K		± 6.0	± 14	ppm/K of 2.5V (− 40°C ~ + 105°C)
	F03P015S05L				± 2.3	± 6	
	F03P025S05L				± 1.4	± 4	
	F03P050S05L				± 0.7	± 3	
Sensitivity (Theoretical value)	F03P006S05L	G _{th}	mV/A		104.2		625mV/If
	F03P015S05L				41.67		
	F03P025S05L				25		
	F03P050S05L				12.5		
Sensitivity error		ε _G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta = − 40°C ~ + 105°C)		TCG	ppm/K			± 40	
Output Linearity (at If)		ε _L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		I _{OM}	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)		I _{no}	μA/ (Hz) ^{1/2}		20		RL = 1k Ω

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f typ = 450kHz)	F03P006S05L	—	mV	40	160	RL = 1kΩ
	F03P015S05L			15	60	
	F03P025S05L			10	40	
	F03P050S05L			5	20	
Reaction time (at 10% of If)	F03P006S05L	tra	μs		0.3	RL = 1kΩ, di/dt = 18A/μs
	F03P015S05L				0.3	RL = 1kΩ, di/dt = 44A/μs
	F03P025S05L				0.3	RL = 1kΩ, di/dt = 68A/μs
	F03P050S05L				0.3	RL = 1kΩ, di/dt = 100A/μs
Response time 1 (at 90% of If)	F03P006S05L	tr	μs		0.3	RL = 1kΩ, di/dt = 18A/μs
	F03P015S05L				0.3	RL = 1kΩ, di/dt = 44A/μs
	F03P025S05L				0.3	RL = 1kΩ, di/dt = 68A/μs
	F03P050S05L				0.3	RL = 1kΩ, di/dt = 100A/μs
Response time 2 (at 10% of If to 90% of Vo)	tr	μs			0.6	RL = 1kΩ, di/dt = If/μs
Frequency bandwidth (± 1dB)	BW	kHz	200			RL = 1kΩ
Frequency bandwidth (± 3dB)	BW	kHz	300			RL = 1kΩ
Output Voltage Accuracy (Overall)	F03P006S05L	X _G	%		1.7	X _G = (100 × V _{oe} /625) + ε _G + ε _L
	F03P015S05L				1.2	
	F03P025S05L				1.0	
	F03P050S05L				0.9	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No. E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

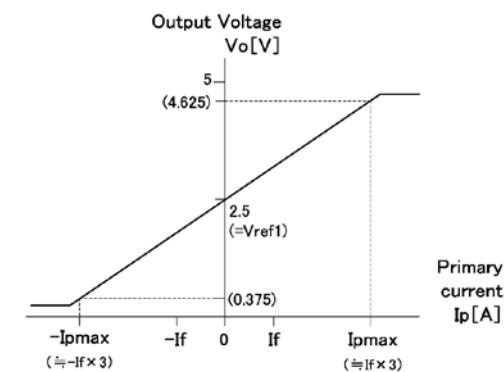


Figure 1 : Linearity curve (Internal reference voltage)

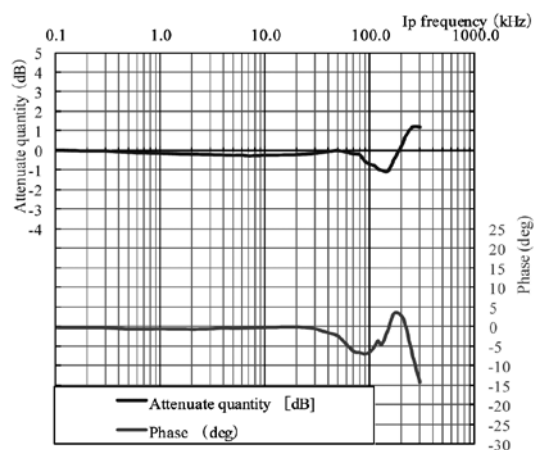


Figure 2 : Frequency response curve

ex) F03P025S05L

Measurement condition Ta=+25°C, RL=1kΩ, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

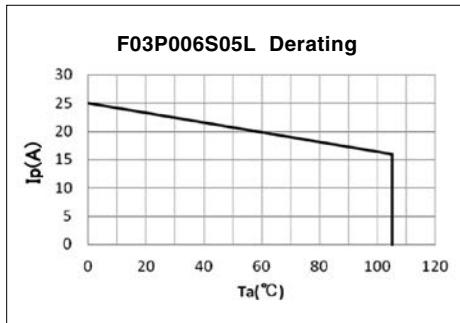


Figure 3 : Ip vs Ta for F03P006S05L

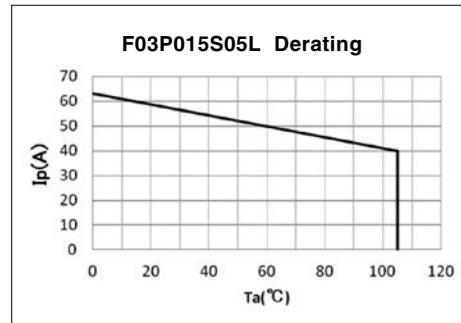


Figure 4 : Ip vs Ta for F03P015S05L

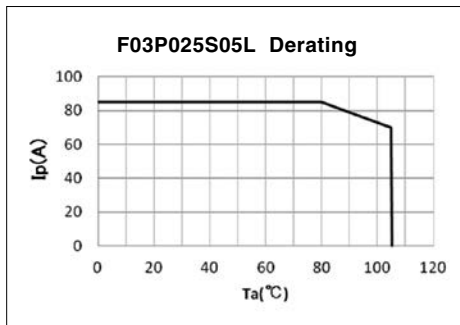


Figure 5 : Ip vs Ta for F03P025S05L

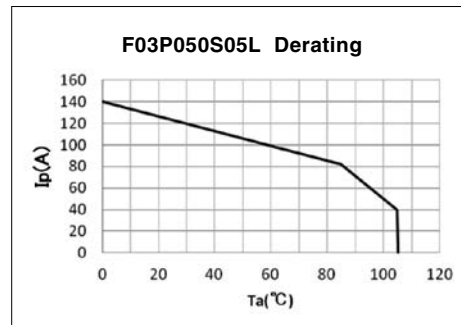


Figure 6 : Ip vs Ta for F03P050S05L

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^\circ\text{C}$
- ③ Primary conductor temperature $< 110^\circ\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

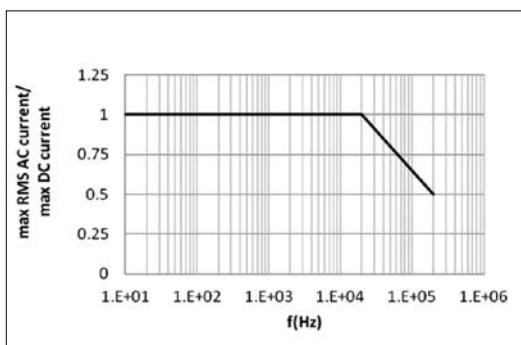


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency

Reference voltage

The Ref pin has two modes Ref IN and Ref OUT :

< Ref OUT mode >


The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurements;

< Ref IN mode >

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V, its voltage is used as the reference voltage at the time of measurement.


- either to source a typical current of $(V_{ref} - 2.5) / 680$, the maximum value will be 2.2mA typ.when $V_{ref2} = 4V$.
- or to sink a typical current of $(2.5 - V_{ref2}) / 680$, the maximum value will be 3.68mA typ.when $V_{ref2} = 0V$.

The following graphs show how the measuring range of each transducer version depends on external reference voltage value V_{ref2} .

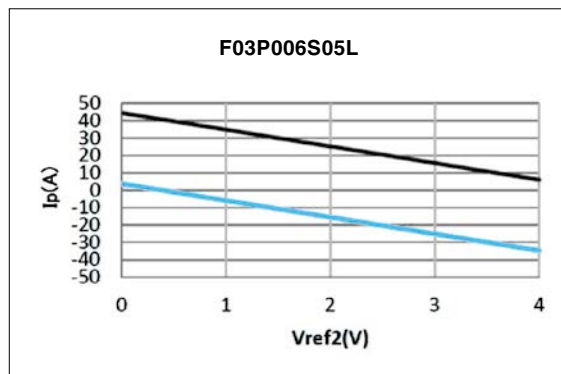


Upper limit : $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2} = 0...4V$)


Lower limit : $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2} = 0...4V$)

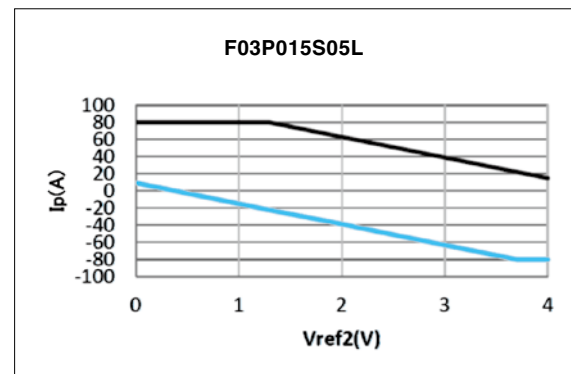

Upper limit : $I_p = 80$ ($V_{ref2} = 0...1.29V$)
 $I_p = -24 \times V_{ref2} + 111$ ($V_{ref2} = 1.29...4V$)
 Lower limit : $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2} = 0...3.7V$)
 $I_p = -80$ ($V_{ref2} = 3.7...4V$)

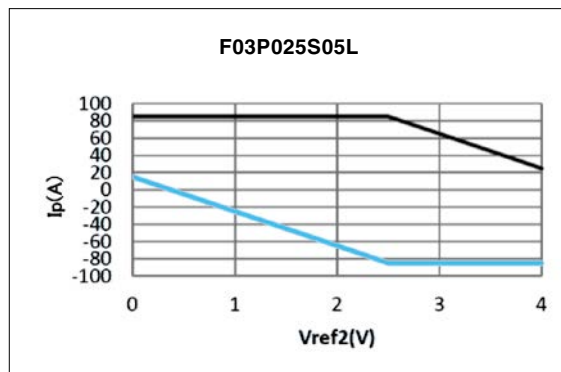


Upper limit : $I_p = 85$ ($V_{ref2} = 0...2.5V$)
 $I_p = -40 \times V_{ref2} + 185$ ($V_{ref2} = 2.5...4V$)
 Lower limit : $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2} = 0...2.5V$)
 $I_p = -85$ ($V_{ref2} = 2.5...4V$)



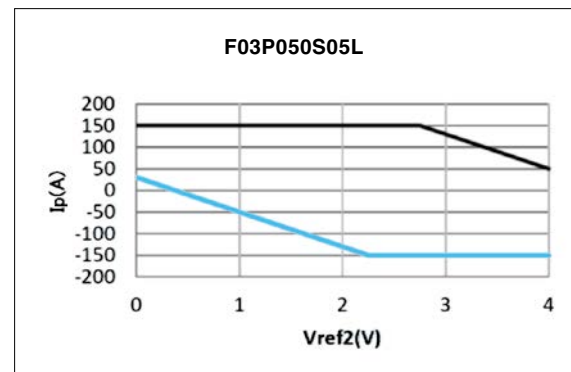


Upper limit : $I_p = 150$ ($V_{ref2} = 0...2.25V$)
 $I_p = -80 \times V_{ref2} + 370$ ($V_{ref2} = 2.25...4V$)
 Lower limit : $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2} = 0...2.25V$)
 $I_p = -150$ ($V_{ref2} = 2.25...4V$)




If you do not want to use the Ref pin, please unconnected.

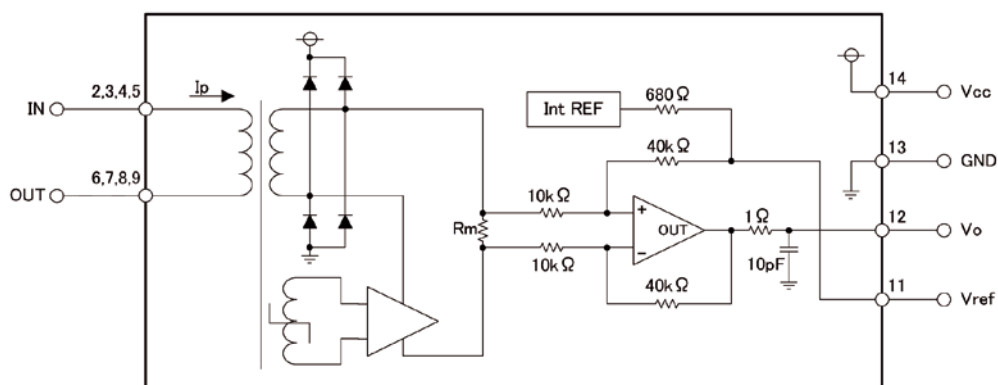

If/4	
If/2	
If	

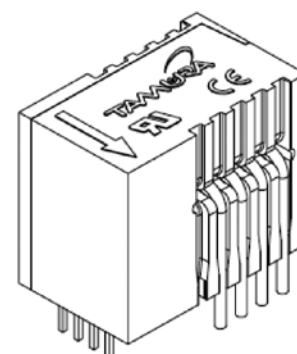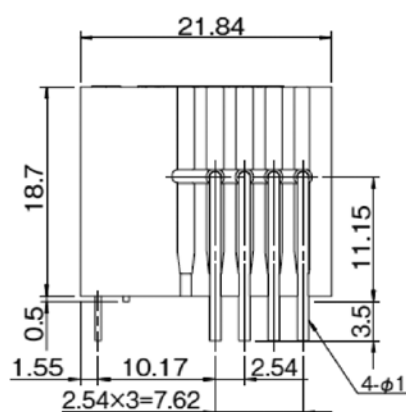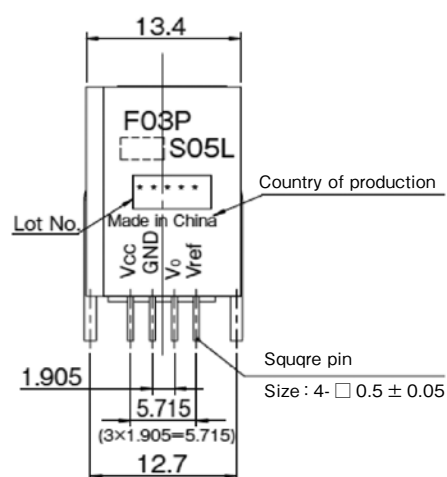


Terminal number	Note
① — ⑧ Output	1. Unless otherwise specified, tolerances shall be $\pm 0.25\text{mm}$
② Input ⑨ Output	2. Unit is [mm]
③ Input ⑩ —	
④ Input ⑪ Vref	
⑤ Input ⑫ Vo	
⑥ Output ⑬ GND	
⑦ Output ⑭ Vcc	

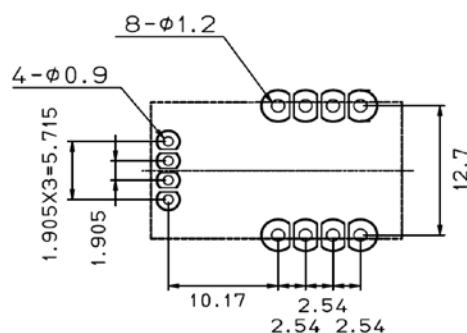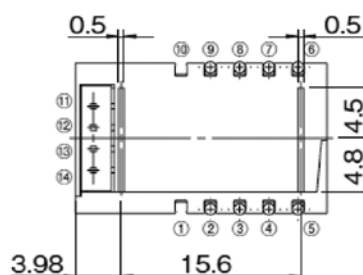

The top side of product is marked for identification with the previous model.

Rated current 6A ··· Blue color
Rated current 15A ··· White color
Rated current 25A ··· Orange color
Rated current 50A ··· Green color

Ex) Marking exeample




↑ Mark shape : L

Fluxgate system / Voltage-output type


F01P***S05, F02P***S05, F03P***S05 SERIES



F01P SERIES



F02P SERIES



F03P SERIES



RoHS

- Super precision & High stability (Low temperature drift) .
- Unipolar power voltage; +5V. Rated Current; 6 ~ 50A.
Multi-range models. MAX_Temp.105°C . Voltage-output type.

Comparison of the main features

Series	Features
F01P***S05	Without reference access.
F02P***S05	With reference access.
F03P***S05	With reference access. Higher creepage and clearance distances.

*** : Rated Current symbol

SPECIFICATIONS

Spec	Types	F01P***S05	F02P***S05	F03P***S05
Rated Current If (*** : Rated Current symbol)		6A (006) / 15A (015) / 25A (025) / 50A (050)		
Maximum current (At Vcc=+5V, Ta=+105°C)		± 20A (If=6A) / ± 51A (If=15A) / ± 85A (If=25A) / ± 150A (If=25A)		
Supply Voltage		+5.00V ± 0.25V		
Output Voltage Accuracy (Overall) <Accuracy of F02P series & F03P series> When the accuracy of output voltage is calculated on the basis of reference output voltage.	If=6A	≤ 2.5%	≤ 1.7%	
	If=15A	≤ 1.9%	≤ 1.2%	
	If=25A	≤ 1.8%	≤ 1.0%	
	If=50A	≤ 1.7%	≤ 0.9%	
Existence of reference access		No	Yes	
Number of primary busbar		3pcs		4pcs
Number of secondary pin		3pcs	4pcs	
Clearance distance, Primary ⇄ Secondary		7.7mm	7.5mm	8.2mm
Creepage distance, Primary ⇄ Secondary		7.7mm	7.5mm	8.2mm
for 1minute (Sensing current 0.5mA) Insulation voltage, Primary ⇄ Secondary		AC4200V	AC4100V	AC4300V
Case material (Flame Rating) / Comparative Tracking Index;		UL94 V-0 / CTI 600V		
STANDARDS		UL508 (file No E243511) ,EN50178, EN61010-1, EN60950-1		
Ambient operating temperature		- 40°C ~ +105°C		

The above-mentioned comparison tables are the auxiliary data for understanding each series. For details, please confirm the next page or subsequent ones. >>>

Fluxgate system / Voltage-output type

F01P SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V _{CC}	V	7	
Primary conductor temperature	—	°C	110	
Non repetitive primary current pulse (20μS), in powered or unpowered state.	i _p	A	20 × I _f	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V _d	—	AC4200V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	d _{CI}	—	7.7mm (TYP)	Primary ⇔ Secondary
Creepage distance	d _{CP}	—	7.7mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index; (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation,non uniform field according to EN50178, EN61010
	—	—	600V, CAT III, PD2	Simple isolation,non uniform field according to EN50178, EN61010

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T _a	°C	− 40		+ 105	
Ambient storage temperature	T _s	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, RL=10kΩ, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F01P006S05	If	A		6		
	F01P015S05				15		
	F01P025S05				25		
	F01P050S05				50		
Maximum current (at Vcc= + 5V, Ta= + 105°C)	F01P006S05	Ipmax	A	− 20		20	
	F01P015S05			− 51		51	
	F01P025S05			− 85		85	
	F01P050S05			− 150		150	
Supply Voltage		Vcc	V	4.75	5.00	5.25	
Number of primary turns		Np	T	1, 2, 3			
Number of secondary turns	F01P006S05	Ns	T		1816		
	F01P015S05				1737		
	F01P025S05				1764		
	F01P050S05				1600		
Consumption current (at If)	F01P006S05	Icc	mA		25		Icc = 15 + Ip(mA) / Ns
	F01P015S05				30		
	F01P025S05				35		
	F01P050S05				55		
Output voltage		Vo	V	0.375		4.625	
Output voltage (at Ip = 0A)		Vo	V		2.5		
Electrical offset voltage * 1	F01P006S05	Voe	mV	− 10.40		10.40	
	F01P015S05			− 7.10		7.10	
	F01P025S05			− 6.25		6.25	
	F01P050S05			− 5.80		5.80	
Electrical offset current referred to primary	F01P006S05	Ioe	A	− 0.10		0.10	
	F01P015S05			− 0.17		0.17	
	F01P025S05			− 0.25		0.25	
	F01P050S05			− 0.46		0.46	
Temperature coefficient of Output voltage (at Ip = 0A)	F01P006S05	TCVo	ppm/K		± 10.0	± 80.0	ppm/K of 2.5V (− 40°C~+ 105°C)
	F01P015S05				± 7.5	± 70.0	
	F01P025S05				± 6.5	± 60.0	
	F01P050S05				± 6.0	± 60.0	
Sensitivity (Theoretical value)	F01P006S05	Gth	mV/A		104.2		625mV/If
	F01P015S05				41.67		
	F01P025S05				25		
	F01P050S05				12.5		
Sensitivity error		εG	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta = − 40°C~+ 105°C)		TCG	ppm/K			± 40	
Output Linearity		εL	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		IOM	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)	F01P006S05	Ino	μA/ (Hz) ^{1/2}		36		RL = 1k Ω
	F01P015S05				90		
	F01P025S05				150		
	F01P050S05				300		

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f typ = 450kHz)	F01P006S05	—	mV	40	160	RL = 1kΩ
	F01P015S05			15	60	
	F01P025S05			10	40	
	F01P050S05			5	20	
Reaction time (at 10% of If)	F01P006S05	tra	μs		0.3	RL = 1kΩ, di/dt = 18A/μs
	F01P015S05				0.3	RL = 1kΩ, di/dt = 44A/μs
	F01P025S05				0.3	RL = 1kΩ, di/dt = 68A/μs
	F01P050S05				0.3	RL = 1kΩ, di/dt = 100A/μs
Response time 1 (at 90% of If)	F01P006S05	tr	μs		0.3	RL = 1kΩ, di/dt = 18A/μs
	F01P015S05				0.3	RL = 1kΩ, di/dt = 44A/μs
	F01P025S05				0.3	RL = 1kΩ, di/dt = 68A/μs
	F01P050S05				0.3	RL = 1kΩ, di/dt = 100A/μs
Response time 2 (at 10% of If to 90% of Vo)	tr	μs			0.6	RL = 1kΩ, di/dt = If/μs
Frequency bandwidth (± 1dB)	BW	kHz	200			RL = 1kΩ
Frequency bandwidth (± 3dB)	BW	kHz	300			RL = 1kΩ
Output Voltage Accuracy (Overall)	F01P006S05	X _G	%		2.5	X _G = (100 × V _{oe} /625) + ε _G + ε _L
	F01P015S05				1.9	
	F01P025S05				1.8	
	F01P050S05				1.7	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No. E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

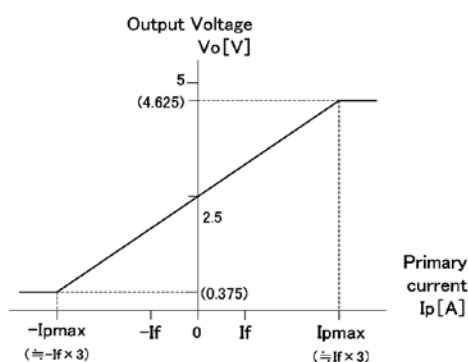


Figure 1 : Linearity curve

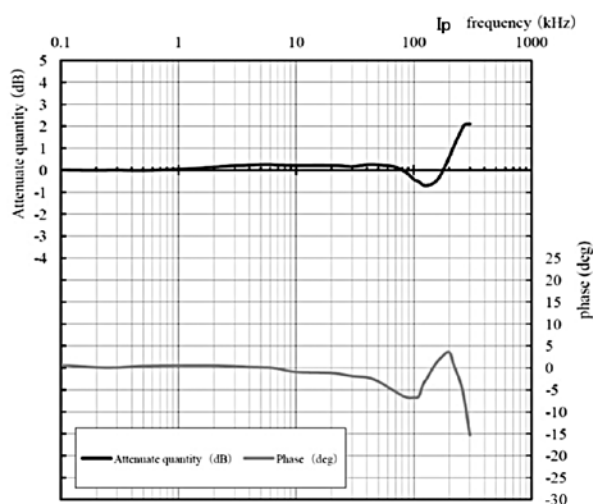


Figure 2 : Frequency response curve

ex) F01P025S05

Measurement condition Ta=+25°C, RL=1kΩ, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

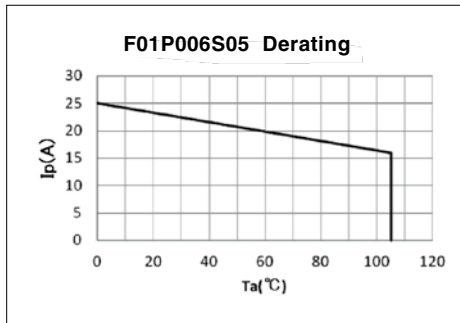


Figure 3 : Ip vs Ta for F01P006S05

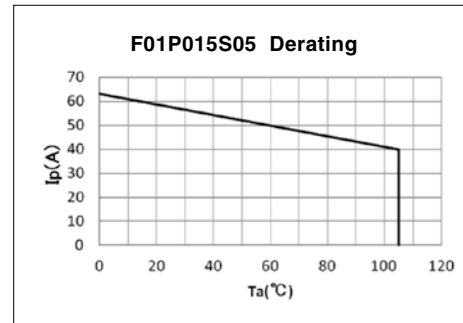


Figure 4 : Ip vs Ta for F01P015S05

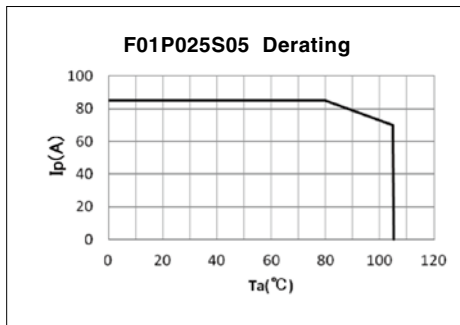


Figure 5 : Ip vs Ta for F01P025S05

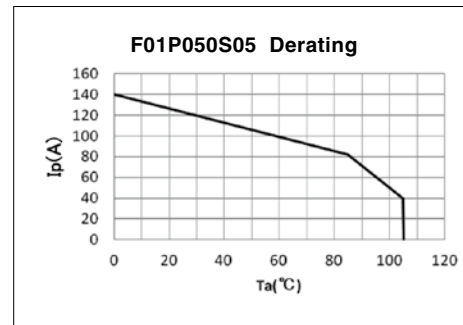


Figure 6 : Ip vs Ta for F01P050S05

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^{\circ}\text{C}$
- ③ Primary conductor temperature $< 110^{\circ}\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating




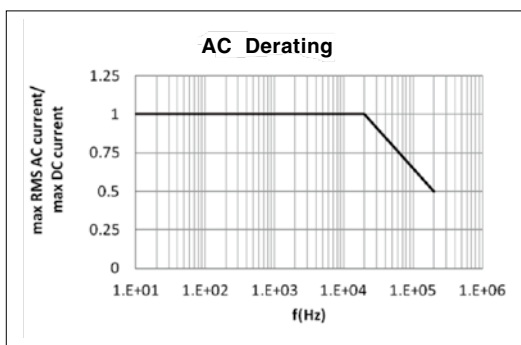


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency


CONNECTION

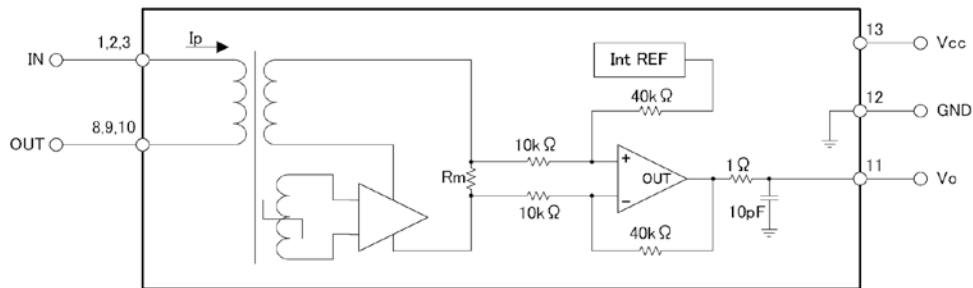

DIMENSIONS (mm)

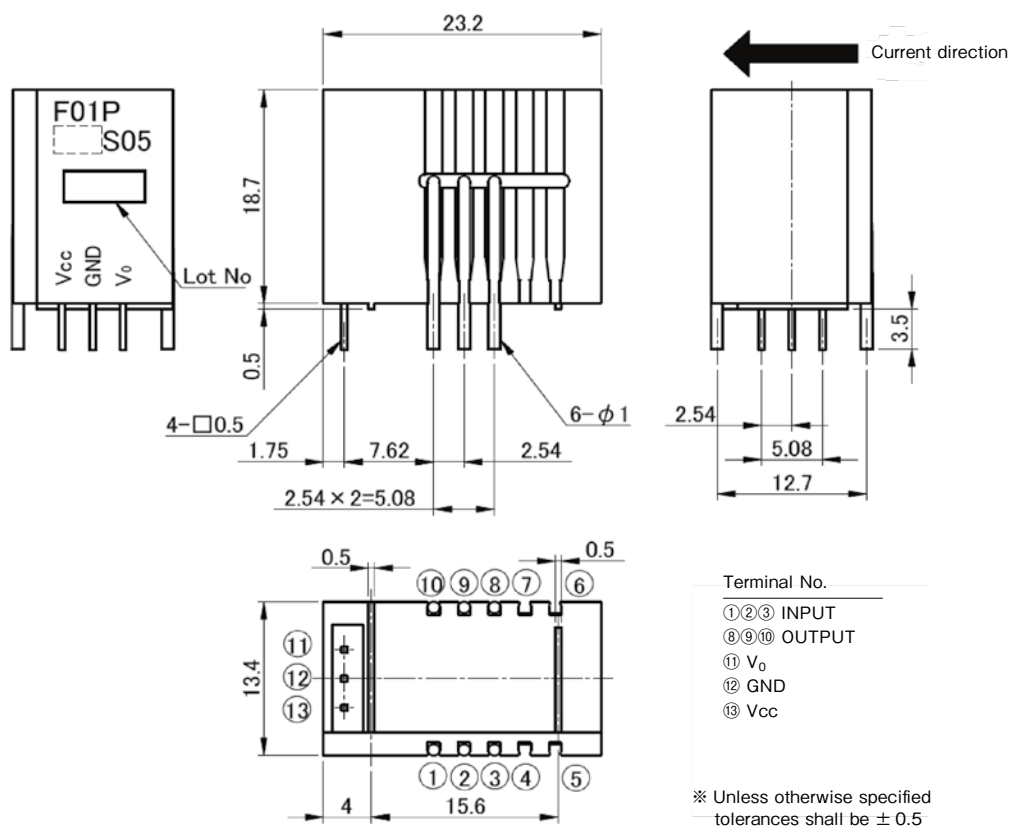


RECOMMENDED HOLE DIAMETER (mm)

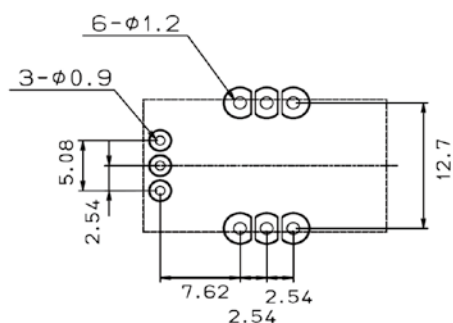

Fluxgate system / Voltage-output type

F02P SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	Vcc	V	7	
Primary conductor temperature	—	°C	110	
Non repetitive primary current pulse (20μS), in powered or unpowered state.	Ip	A	20 × If	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	Vd	—	AC4100V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	dCi	—	7.5mm (TYP)	Primary ⇔ Secondary
Creepage distance	dCp	—	7.5mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation,non uniform field according to EN50178, EN61010
	—	—	600V, CAT III, PD2	Simple isolation,non uniform field according to EN50178, EN61010

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	Ta	°C	− 40		+ 105	
Ambient storage temperature	T _s	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, RL=10kΩ, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F02P006S05	If	A		6		
	F02P015S05				15		
	F02P025S05				25		
	F02P050S05				50		
Maximum current (at Vcc= + 5V, Ta= + 105°C)	F02P006S05	Ipm _{max}	A	− 20		20	
	F02P015S05			− 51		51	
	F02P025S05			− 85		85	
	F02P050S05			− 150		150	
Supply Voltage		Vcc	V	4.75	5.00	5.25	
Number of primary turns		Np	T	1, 2, 3			
Number of secondary turns	F02P006S05	Ns	T		1816		
	F02P015S05				1737		
	F02P025S05				1764		
	F02P050S05				1600		
Consumption current (at If)	F02P006S05	Icc	mA		25		Icc = 15 + Ip(mA) / Ns
	F02P015S05				30		
	F02P025S05				35		
	F02P050S05				55		
Internal reference voltage (at Ip = 0A)		Vref1	V	2.495	2.500	2.505	Ref OUT mode
External reference voltage		Vref2	V	0		4	Ref IN mode
Output voltage		Vo	V	0.375		4.625	
Output voltage (at Ip = 0A)		Vo	V		Vref1, Vref2		
Electrical offset voltage * 1	F02P006S05	Voe	mV	− 5.300		5.300	
	F02P015S05			− 2.210		2.210	
	F02P025S05			− 1.350		1.350	
	F02P050S05			− 0.725		0.725	
Electrical offset current referred to primary	F02P006S05	Ioe	mA	− 51		51	
	F02P015S05			− 53		53	
	F02P025S05			− 54		54	
	F02P050S05			− 58		58	
Temperature coefficient of Internal reference voltage		TCVref1	ppm/K		± 5.0	± 50	
Temperature coefficient of Output voltage (at Ip = 0A)	F02P006S05	TCVo	ppm/K		± 6.0	± 14	ppm/K of 2.5V (− 40°C ~ + 105°C)
	F02P015S05				± 2.3	± 6	
	F02P025S05				± 1.4	± 4	
	F02P050S05				± 0.7	± 3	
Sensitivity (Theoretical value)	F02P006S05	Gth	mV/A		104.2		625mV/If
	F02P015S05				41.67		
	F02P025S05				25		
	F02P050S05				12.5		
Sensitivity error		ε _G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta = − 40°C ~ + 105°C)		TCG	ppm/K			± 40	
Output Linearity		ε _L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		I _{OM}	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)		I _{no}	μA/ (Hz) ^{1/2}		20		RL = 1k Ω

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f typ = 450kHz)	F02P006S05	—	mV	40	160	RL = 1k Ω
	F02P015S05			15	60	
	F02P025S05			10	40	
	F02P050S05			5	20	
Reaction time (at 10% of If)	F02P006S05	tra	μs		0.3	RL = 1k Ω, di/dt = 18A/μs
	F02P015S05				0.3	RL = 1k Ω, di/dt = 44A/μs
	F02P025S05				0.3	RL = 1k Ω, di/dt = 68A/μs
	F02P050S05				0.3	RL = 1k Ω, di/dt = 100A/μs
Response time 1 (at 90% of If)	F02P006S05	tr	μs		0.3	RL = 1k Ω, di/dt = 18A/μs
	F02P015S05				0.3	RL = 1k Ω, di/dt = 44A/μs
	F02P025S05				0.3	RL = 1k Ω, di/dt = 68A/μs
	F02P050S05				0.3	RL = 1k Ω, di/dt = 100A/μs
Response time 2 (at 10% of If to 90% of Vo)	tr	μs			0.6	RL = 1k Ω, di/dt = If/μs
Frequency bandwidth (± 1dB)	BW	kHz	200			RL = 1k Ω
Frequency bandwidth (± 3dB)	BW	kHz	300			RL = 1k Ω
Output Voltage Accuracy (Overall)	F02P006S05	X _G	%		1.7	X _G = (100 × V _{oe} /625) + ε _G + ε _L
	F02P015S05				1.2	
	F02P025S05				1.0	
	F02P050S05				0.9	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No. E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

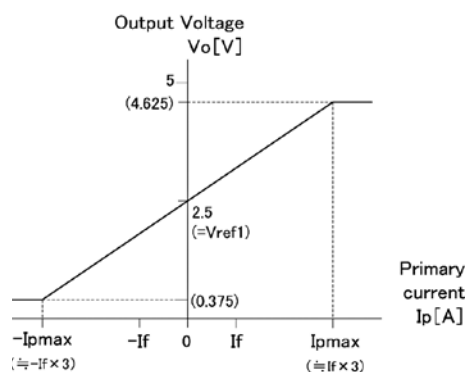


Figure 1 : Linearity curve (Internal reference voltage)

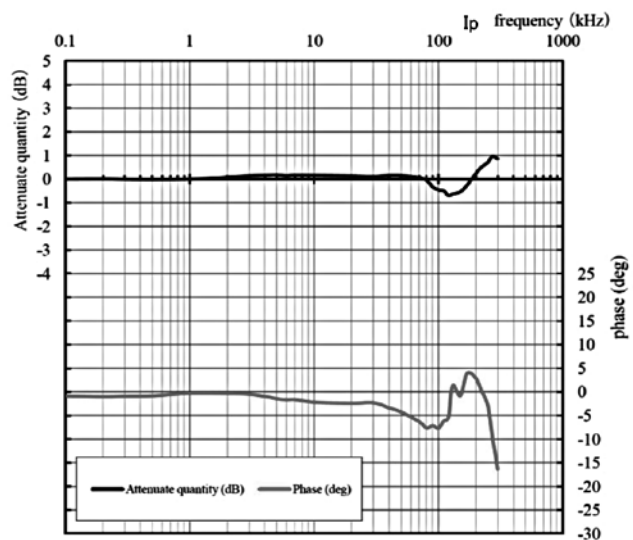


Figure 2 : Frequency response curve

ex) F02P025S05

Measurement condition Ta=+25°C, RL=1k Ω, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

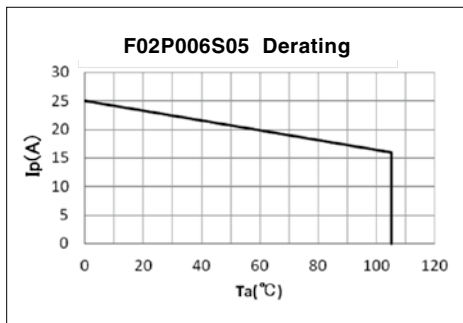


Figure 3 : Ip vs Ta for F02P006S05

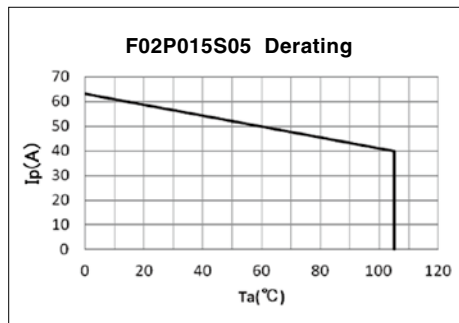


Figure 4 : Ip vs Ta for F02P015S05

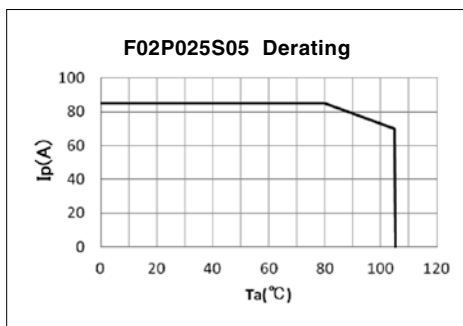


Figure 5 : Ip vs Ta for F02P025S05

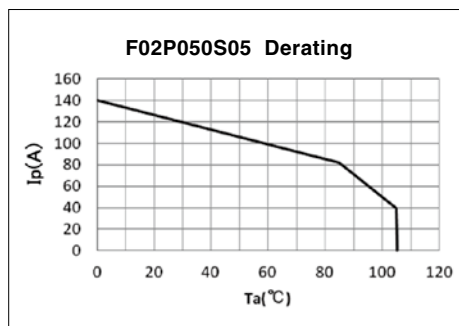


Figure 6 : Ip vs Ta for F02P050S05

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^{\circ}\text{C}$
- ③ Primary conductor temperature $< 110^{\circ}\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

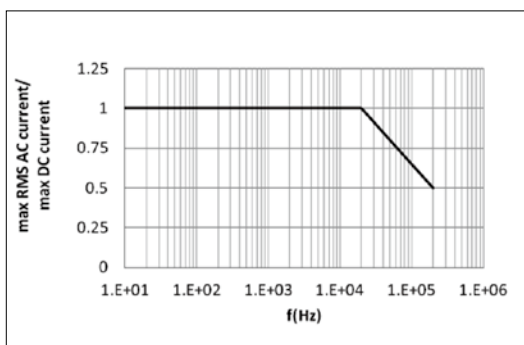


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency

Reference voltage

The Ref pin has two modes Ref IN and Ref OUT:

< Ref OUT mode >

The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurements;


< Ref IN mode >

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V , its voltage is used as the reference voltage at the time of measurement.

-either to source a typical current of $(V_{ref} - 2.5) / 680$, the maximum value will be 2.2mA typ. when $V_{ref2} = 4V$.


-or to sink a typical current of $(2.5 - V_{ref2}) / 680$, the maximum value will be 3.68mA typ. when $V_{ref2} = 0V$.

The following graphs show how the measuring range of each transducer version depends on external reference voltage value V_{ref2} .

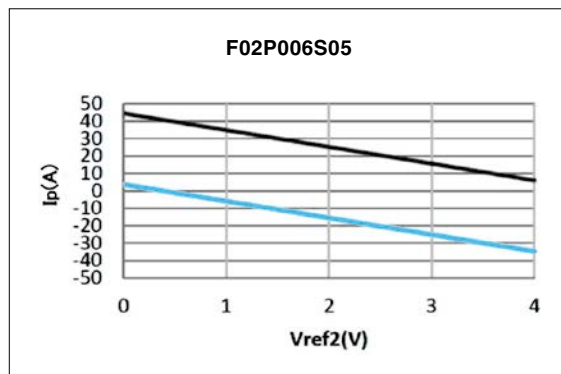

Upper limit : $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2} = 0 \dots 4V$)

Lower limit : $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2} = 0 \dots 4V$)

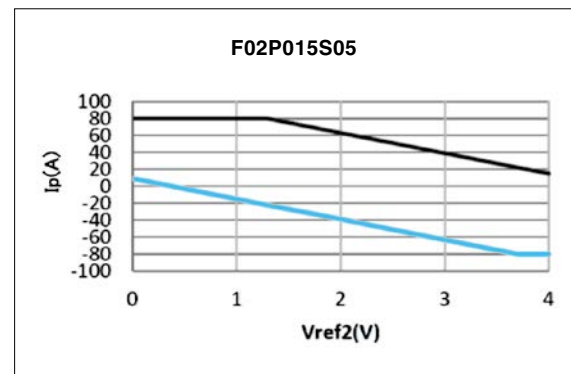


Upper limit : $I_p = 80$ ($V_{ref2} = 0 \dots 1.29V$)

$I_p = -24 \times V_{ref2} + 111$ ($V_{ref2} = 1.29 \dots 4V$)

Lower limit : $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2} = 0 \dots 3.7V$)

$I_p = -80$ ($V_{ref2} = 3.7 \dots 4V$)

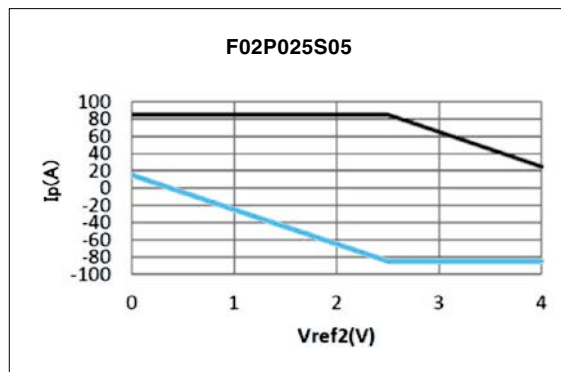


Upper limit : $I_p = 85$ ($V_{ref2} = 0 \dots 2.5V$)

$I_p = -40 \times V_{ref2} + 185$ ($V_{ref2} = 2.5 \dots 4V$)

Lower limit : $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2} = 0 \dots 2.5V$)

$I_p = -85$ ($V_{ref2} = 2.5 \dots 4V$)

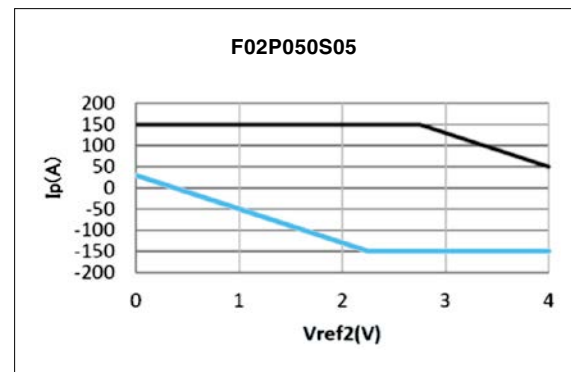

Upper limit : $I_p = 150$ ($V_{ref2} = 0 \dots 2.75V$)


$I_p = -80 \times V_{ref2} + 370$ ($V_{ref2} = 2.75 \dots 4V$)

Lower limit : $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2} = 0 \dots 2.25V$)


$I_p = -150$ ($V_{ref2} = 2.25 \dots 4V$)

If you do not want to use the Ref pin, please unconnected.


CONNECTION

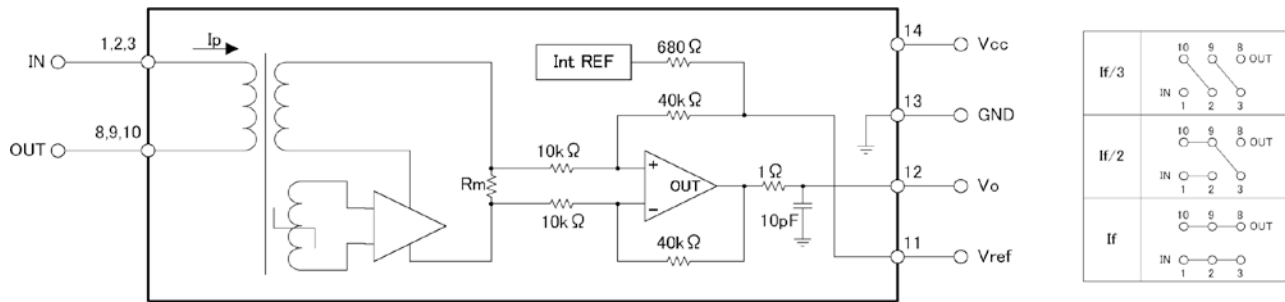

DIMENSIONS (mm)

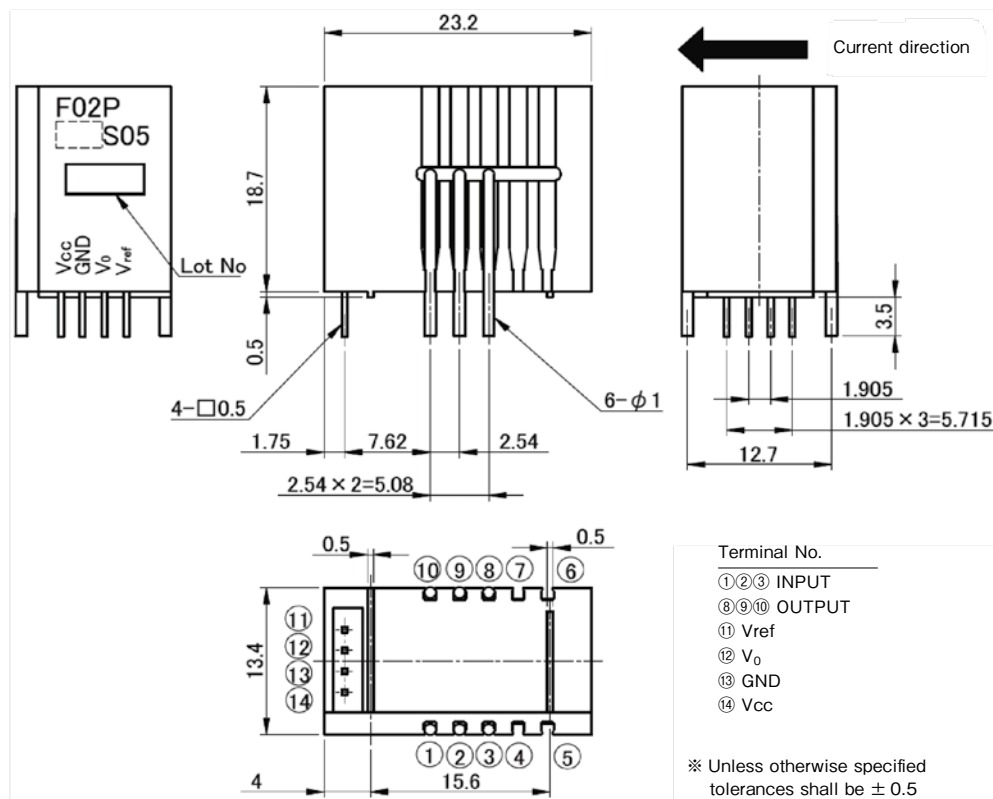

RECOMMENDED HOLE DIAMETER (mm)

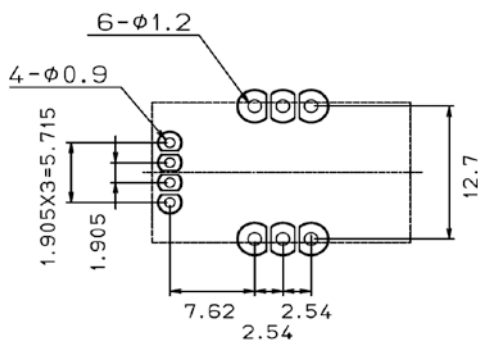

Fluxgate system / Voltage-output type

F03P SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V _{CC}	V	7	
Primary conductor temperature	—	°C	110	
Non repetitive primary current pulse (20μS), in powered or unpowered state.	I _p	A	20 × I _f	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V _d	—	AC4300V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	d _{CI}	—	8.2mm (TYP)	Primary ⇔ Secondary
Creepage distance	d _{CP}	—	8.2mm (TYP)	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN61010
	—	—	600V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178
	—	—	1000V, CAT III, PD2	Simple isolation, non uniform field according to EN50178

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T _a	°C	− 40		+ 105	
Ambient storage temperature	T _s	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Rated Current	F03P006S05	If	A		6		
	F03P015S05				15		
	F03P025S05				25		
	F03P050S05				50		
Maximum current	F03P006S05	I _{pmax}	A	− 20		20	
	F03P015S05			− 51		51	
	F03P025S05			− 85		85	
	F03P050S05			− 150		150	
Supply Voltage		V _{cc}	V	4.75	5.00	5.25	
Number of primary turns		N _p	T	1, 2, 3, 4			
Number of secondary turns	F03P006S05	N _s	T		1816		
	F03P015S05				1737		
	F03P025S05				1764		
	F03P050S05				1600		
Consumption current (at If)	F03P006S05	I _{cc}	mA		25		I _{cc} =15+I _p (mA)/N _s
	F03P015S05				30		
	F03P025S05				35		
	F03P050S05				55		
Internal reference voltage (at I _p =0A)		V _{ref1}	V	2.495	2.500	2.505	Ref OUT mode
External reference voltage		V _{ref2}	V	0		4	Ref IN mode
Output voltage		V _o	V	0.375		4.625	
Output voltage (at I _p =0A)		V _o	V		V _{ref1} , V _{ref2}		
Electrical offset voltage * 1	F03P006S05	V _{oe}	mV	− 5.300		5.300	
	F03P015S05			− 2.210		2.210	
	F03P025S05			− 1.350		1.350	
	F03P050S05			− 0.725		0.725	
Electrical offset current referred to primary	F03P006S05	I _{oe}	mA	− 51		51	
	F03P015S05			− 53		53	
	F03P025S05			− 54		54	
	F03P050S05			− 58		58	
Temperature coefficient of Internal reference voltage		TCV _{ref1}	ppm/K		± 5.0	± 50	
Temperature coefficient of Output voltage (at I _p =0A)	F03P006S05	TCV _o	ppm/K		± 6.0	± 14	ppm/K of 2.5V (− 40°C~+ 105°C)
	F03P015S05				± 2.3	± 6	
	F03P025S05				± 1.4	± 4	
	F03P050S05				± 0.7	± 3	
Sensitivity (Theoretical value)	F03P006S05	G _{th}	mV/A		104.2		625mV/If
	F03P015S05				41.67		
	F03P025S05				25		
	F03P050S05				12.5		
Sensitivity error		ε _G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at Ta= − 40°C~+ 105°C)		TCG	ppm/K			± 40	
Output Linearity (at If)		ε _L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at 10 × If)		I _{OM}	A	− 0.1		0.1	
Output current noise referred to primary (at 100Hz ~ 100kHz)		I _{no}	μ A/(Hz) ^{1/2}		20		RL=1k Ω

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

Ta=+25°C, Np=1T, RL=10kΩ, Vcc=+5V

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency (f typ =450kHz)	F03P006S05	—	mV	40	160	RL=1kΩ
	F03P015S05			15	60	
	F03P025S05			10	40	
	F03P050S05			5	20	
Reaction time (at 10% of If)	F03P006S05	tra	μs		0.3	RL=1kΩ, di/dt=18A/μs
	F03P015S05				0.3	RL=1kΩ, di/dt=44A/μs
	F03P025S05				0.3	RL=1kΩ, di/dt=68A/μs
	F03P050S05				0.3	RL=1kΩ, di/dt=100A/μs
Response time 1 (at 90% of If)	F03P006S05	tr	μs		0.3	RL=1kΩ, di/dt=18A/μs
	F03P015S05				0.3	RL=1kΩ, di/dt=44A/μs
	F03P025S05				0.3	RL=1kΩ, di/dt=68A/μs
	F03P050S05				0.3	RL=1kΩ, di/dt=100A/μs
Response time 2 (at 10% of If to 90% of Vo)	tr	μs			0.6	RL=1kΩ, di/dt=If/μs
Frequency bandwidth (±1dB)	BW	kHz	200			RL=1kΩ
Frequency bandwidth (±3dB)	BW	kHz	300			RL=1kΩ
Output Voltage Accuracy (Overall)	F03P006S05	XG	%		1.7	$X_G = (100 \times V_{oe}/625) + \varepsilon_G + \varepsilon_L$
	F03P015S05				1.2	
	F03P025S05				1.0	
	F03P050S05				0.9	

STANDARDS

EN50178, EN61010-1, EN60950-1, UL508 (file No. E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

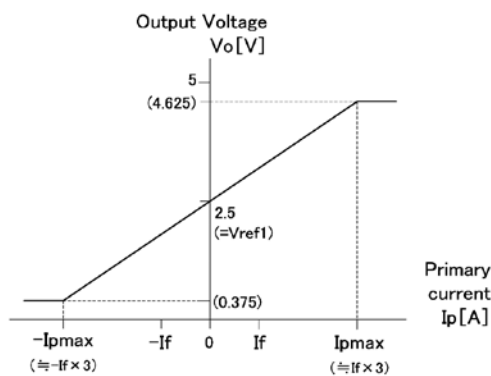


Figure 1 : Linearity curve (Internal reference voltage)

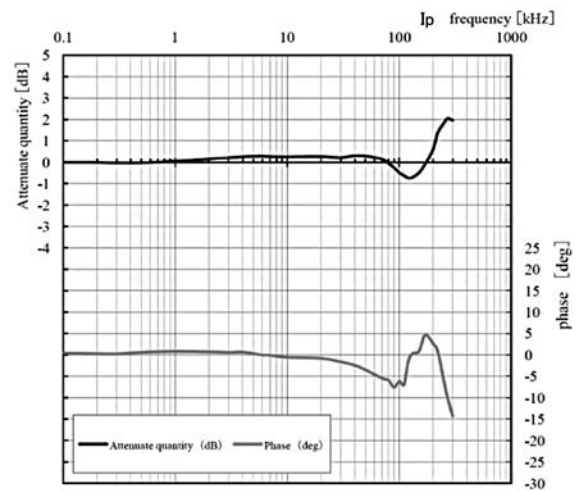


Figure 2 : Frequency response curve

ex) F03P025S05L

Measurement condition Ta=+25°C, RL=1kΩ, Ip=3A, Vcc=+5V

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

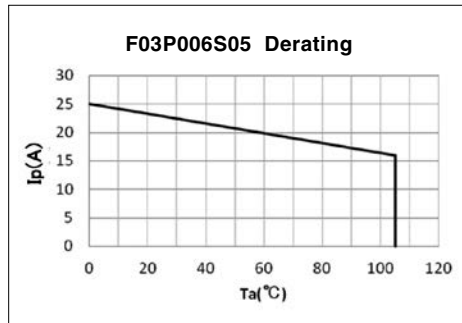


Figure 3 : Ip vs Ta for F03P006S05

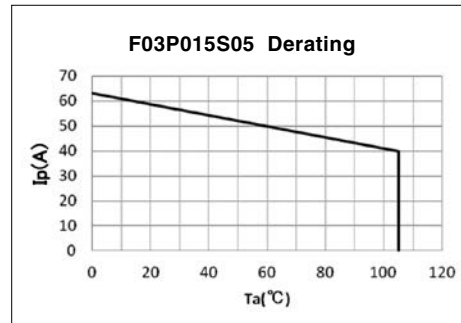


Figure 4 : Ip vs Ta for F03P015S05

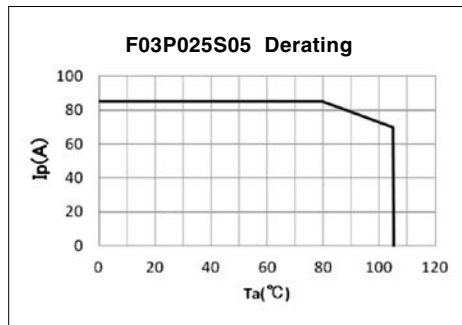


Figure 5 : Ip vs Ta for F03P025S05

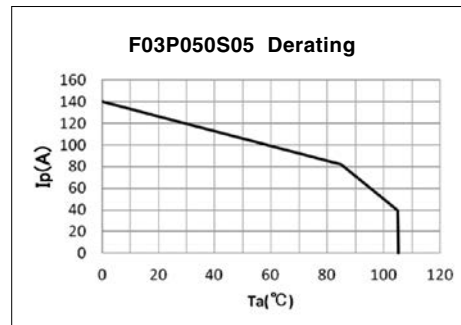


Figure 6 : Ip vs Ta for F03P050S05

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^\circ\text{C}$
- ③ Primary conductor temperature $< 110^\circ\text{C}$
- ④ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

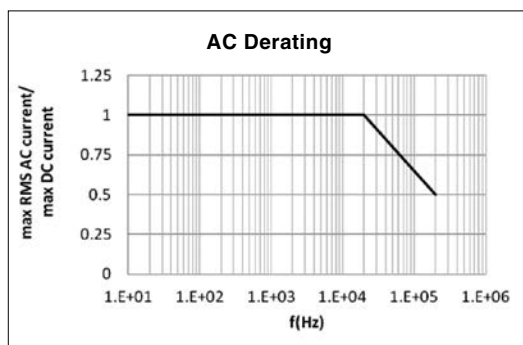


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency

Reference voltage

The Ref pin has two modes Ref IN and Ref OUT :

< Ref OUT mode >


The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurements;

< Ref IN mode >

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V, its voltage is used as the reference voltage at the time of measurement.


- either to source a typical current of $(V_{ref} - 2.5) / 680$, the maximum value will be 2.2mA typ. when $V_{ref2} = 4V$.
- or to sink a typical current of $(2.5 - V_{ref2}) / 680$, the maximum value will be 3.68mA typ. when $V_{ref2} = 0V$.

The following graphs show how the measuring range of each transducer version depends on external reference voltage value V_{ref2} .

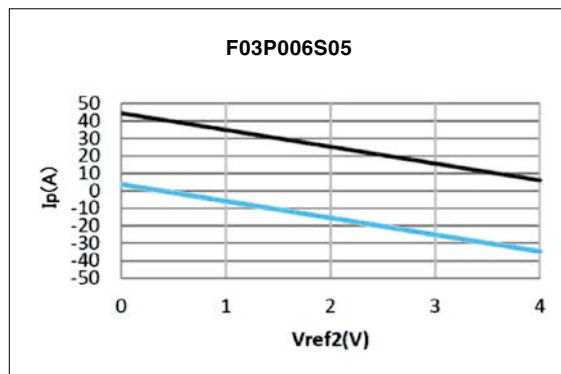

Upper limit : $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2} = 0...4V$)

Lower limit : $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2} = 0...4V$)

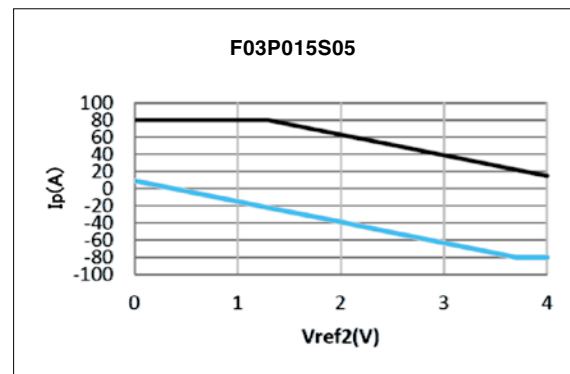


Upper limit : $I_p = 80$ ($V_{ref2} = 0...1.29V$)

$I_p = -24 \times V_{ref2} + 111$ ($V_{ref2} = 1.29...4V$)

Lower limit : $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2} = 0...3.7V$)

$I_p = -80$ ($V_{ref2} = 3.7...4V$)

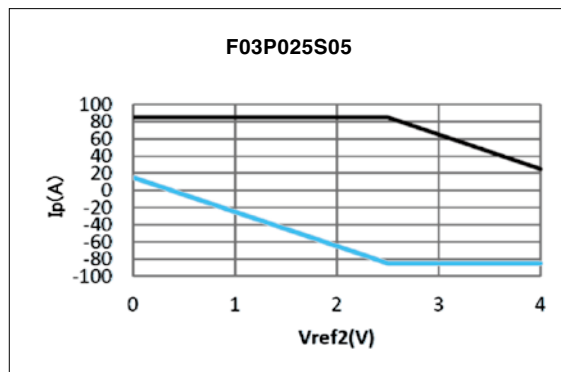


Upper limit : $I_p = 85$ ($V_{ref2} = 0...2.5V$)

$I_p = -40 \times V_{ref2} + 185$ ($V_{ref2} = 2.5...4V$)

Lower limit : $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2} = 0...2.5V$)

$I_p = -85$ ($V_{ref2} = 2.5...4V$)

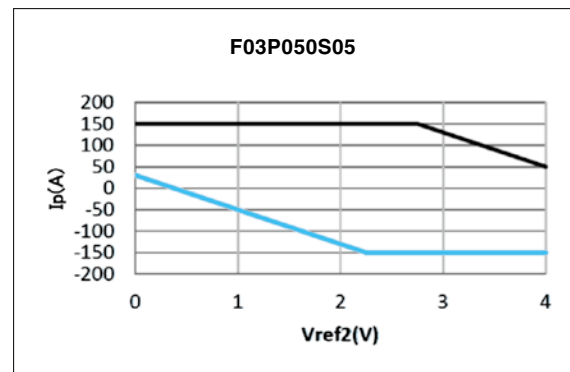

Upper limit : $I_p = 150$ ($V_{ref2} = 0...2.75V$)


$I_p = -80 \times V_{ref2} + 370$ ($V_{ref2} = 2.75...4V$)

Lower limit : $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2} = 0...2.25V$)

$I_p = -150$ ($V_{ref2} = 2.25...4V$)


If you do not want to use the Ref pin, please unconnected.

CONNECTION

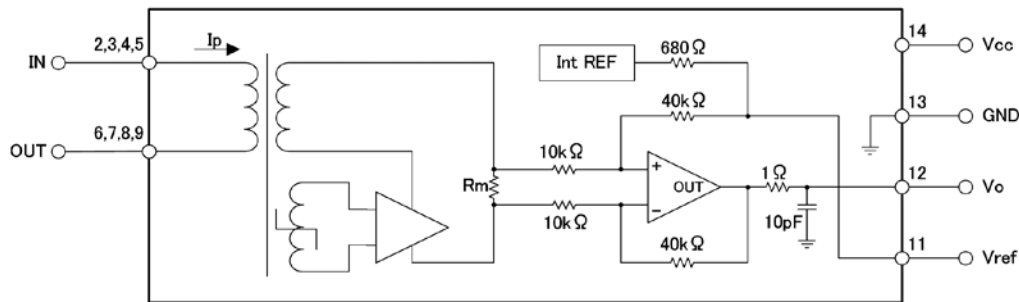


If/4	9	8	7	6	OUT
IN	2	3	4	5	
If/2	9	8	7	6	OUT
IN	2	3	4	5	
If	9	8	7	6	OUT
IN	2	3	4	5	

DIMENSIONS (mm)

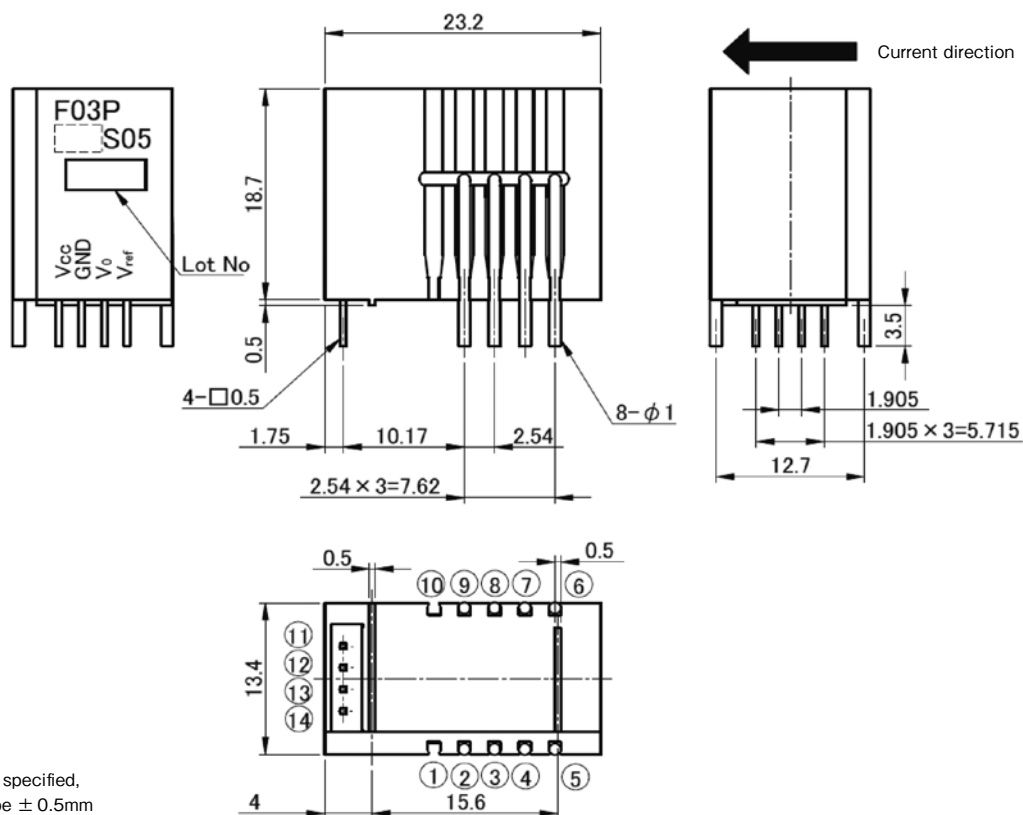


RECOMMENDED HOLE DIAMETER (mm)

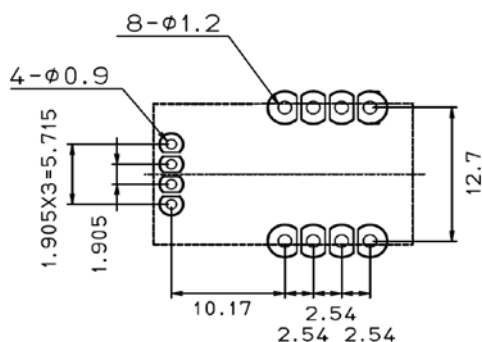

Magnetic Proportion System

L18P D15-OP SERIES

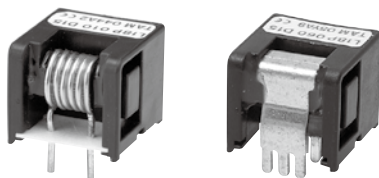

RoHS



SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc= ±15V

Spec	Types	L18P***D15-OP ***: Primary current code									
	*** :	003	005	010	015	020	025	030	040	050	060
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3		
Saturation current	If max	If × 3 *1									
Rated output voltage	Vo	4V ± 0.040V (at If)							4V ± 0.050V (at If)		
Offset voltage*2	Vof	≤± 0.040V (at If = 0A)							≤± 0.050V (at If = 0A)		
Output linearity (without offset)	ε _L	≤± 1% (at If)									
Power supply voltage	Vcc	± 12V (± 5%) ~ ± 15V (± 5%)									
Consumption current	Icc	± 14mA (typ) , ≤± 18mA									
di/dt Response time	tr	≤ 5μs (di/dt = If / μs)									
Thermal drift of gain	T _c Vo	≤± 0.1% / °C (Without T _c Vof)									
Thermal drift of offset	T _c Vof	≤± 1.5mV / °C									
Hysteresis error	V _{oH}	≤ 25mV (at If = 0A → If → 0A)							≤ 40mV (at If = 0A → If → 0A)		
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary									
Insulation resistance	R _{is}	≥ 500M Ω (at DC500V) Primary ⇔ Secondary									
Ambient Operating temperature	T _A	- 30℃~+ 80℃									
Ambient storage temperature	T _S	- 40℃~+ 85℃									

* 1 Also operate at Vcc = ± 12V power supplies, measuring range reduced to 2.5 x If. * 2 Offset voltage value is after removal of core hysteresis.
* Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

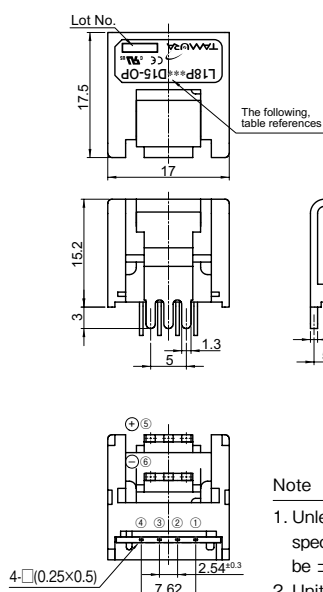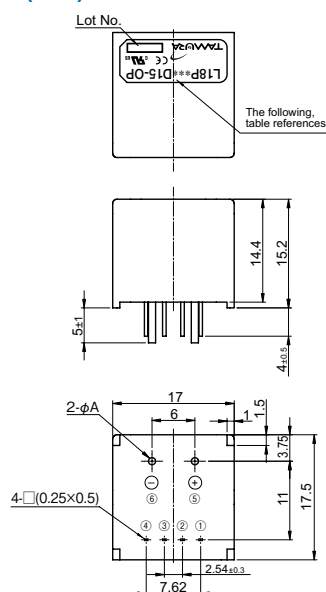

Terminal number

- ① - Vcc (- 15V)
- ② GND
- ③ + Vcc (+ 15V)
- ④ Vout
- ⑤ Primary input current (+)
- ⑥ Primary input current (-)

Current	***	φA
3A	003	φ0.6
5A	005	φ0.8
10A	010	φ1.1
15A	015	φ1.4
20A	020	φ1.6
25A	025	φ1.6
30A	030	φ1.6
40A	040	Busbar
50A	050	Busbar
60A	060	Busbar

Weight:


8g

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System

SL18P D15 SERIES

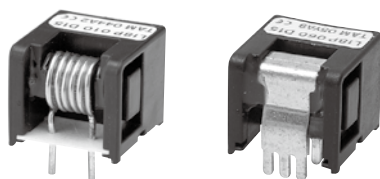

RoHS

Anti-Sulfurated



SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Types		SL18P***D15***: Primary current code									
Spec	***:	003	005	010	015	020	025	030	040	050	060
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3		
Saturation current	If max	If × 3*1									
Rated output voltage	Vo	4V ± 0.040V (at If)							4V ± 0.050V (at If)		
Offset voltage*2	Vof	± 0.040V (at If = 0A)							± 0.050V (at If = 0A)		
Output linearity (without offset)	εL	± 1% (at If)									
Power supply voltage	Vcc	± 12V (± 5%) ~ ± 15V (± 5%)									
Consumption current	Icc	± 12mA (typ) , ≤ 15mA									
di/dt Response time	tr	≤ 5μs (di/dt = If / μs)									
Thermal drift of gain	TcVo	± 0.1% / °C (Without Tc Vof)									
Thermal drift of offset	TcVof	± 1.5mV / °C									
Hysteresis error	Voh	≤ 25mV (at If = 0A → If → 0A)							≤ 40mV (at If = 0A → If → 0A)		
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary									
Insulation resistance	Ris	≥ 500M Ω (at DC500V) Primary ⇔ Secondary									
Ambient Operating temperature	TA	- 30℃~+ 80℃									
Ambient storage temperature	TS	- 40℃~+ 85℃									

* 1 Also operate at Vcc = ± 12V power supplies, measuring range reduced to 2.5 x If. * 2 Offset voltage value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition. * Anti-Sulfurated (Used resistors : Gold internal Electrodes, PCB coating : HumiSeal®) * Reliability test High Temperature and High Humidity Operation Test (85°C, 85%RH, 1000h, N=11, Pass)

DIMENSIONS

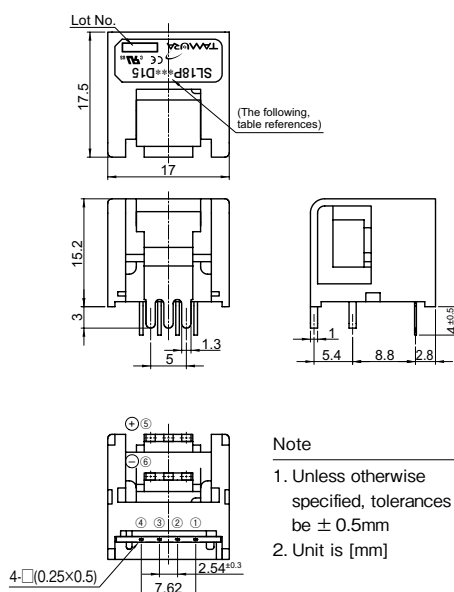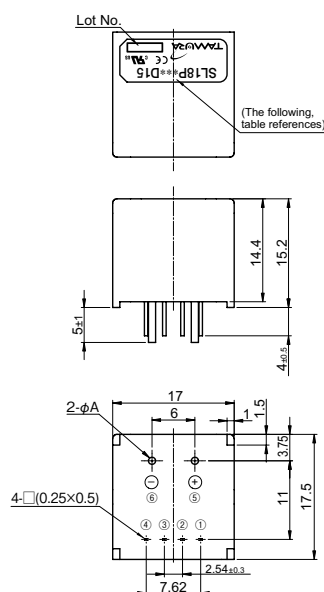

Terminal number

- ① - Vcc (- 15V)
- ② GND
- ③ + Vcc (+ 15V)
- ④ Vout
- ⑤ Primary input current (+)
- ⑥ Primary input current (-)

Current	***	φA
3A	003	φ0.6
5A	005	φ0.8
10A	010	φ1.1
15A	015	φ1.4
20A	020	φ1.6
25A	025	φ1.6
30A	030	φ1.6
40A	040	Busbar
50A	050	Busbar
60A	060	Busbar

Note


1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Weight:

8g

Magnetic Proportion System

L18P D15 SERIES

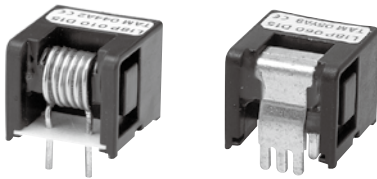

RoHS

TAMURA recommends L18P D15-OP series as a succession model.


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Spec		Types		L18P003D15	L18P005D15	L18P010D15	L18P015D15	L18P020D15	L18P025D15	L18P030D15	L18P040D15	L18P050D15	L18P060D15
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A		
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3				
Saturation current	If max	If × 3											
Rated output voltage	Vo	4V ± 0.040V (at If)								4V ± 0.050V (at If)			
Offset voltage	Vof	≤± 0.040V (at If = 0A) * 1								≤± 0.050V (at If = 0A) * 1			
Output linearity (without offset)	ε _L	≤± 1% (at If)											
Power supply voltage	Vcc	± 15V ± 5%											
Consumption current	Icc	± 12mA (typ) , ≤± 15mA											
di/dt Response time	tr	≤ 5μs (di/dt = If / μs)											
Thermal drift of gain	T _C Vo	≤± 0.1% / °C (Without Tc Vof)											
Thermal drift of offset	T _C Vof	≤± 1.5mV / °C											
Hysteresis error	V _{OH}	≤ 25mV (at If = 0A → If → 0A)								≤ 40mV (at If = 0A → If → 0A)			
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary											
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) Primary ⇔ Secondary											
Ambient Operating temperature	T _A	- 30℃~-+ 80℃											
Ambient storage temperature	T _S	- 40℃~-+ 85℃											

* 1 Offset voltage value is after removal of core hysteresis. Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

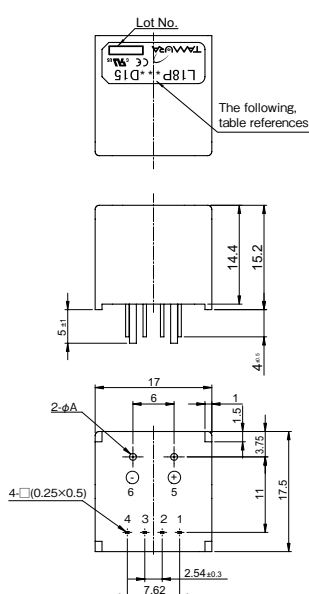


Terminal number

- 1 - Vcc
- 2 GND
- 3 + Vcc
- 4 OUT
- 5 + IN
- 6 - IN

Current	***	φA
3A	003	φ0.6
5A	005	φ0.8
10A	010	φ1.1
15A	015	φ1.4
20A	020	φ1.6
25A	025	φ1.6
30A	030	φ1.6

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Unit is [mm]

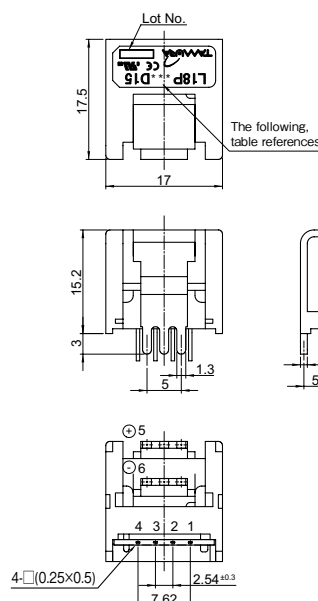

Terminal number

- 1 - Vcc
- 2 GND
- 3 + Vcc
- 4 OUT
- 5 + IN
- 6 - IN


Current	***
40A	040
50A	050
60A	060

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Unit is [mm]

Magnetic Proportion System

L18P S05 SERIES

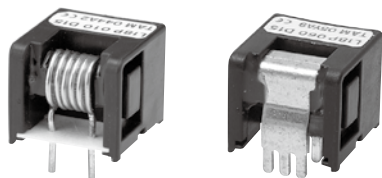

RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc= +5V

Spec		Types		L18P003S05	L18P005S05	L18P010S05	L18P015S05	L18P020S05	L18P025S05	L18P030S05	L18P040S05	L18P050S05	L18P060S05
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A		
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3				
Saturation current	If max	If × 1.5 *1											
Rated output voltage	Vo	Vof + 1.5V ± 0.045V (at If)											
Offset voltage	Vof	Vcc/2 ± 0.035V (at If = 0A) *2											
Output linearity (without offset)	ε _L	≤± 1% (at If)											
Power supply voltage	Vcc	+ 5V ± 5%											
Consumption current	Icc	≤ 15mA											
di/dt Response time	tr	≤ 5μs (di/dt = If /μs)											
Thermal drift of gain	T _c Vo	≤± 2.0mV / °C (Without Tc Vof)											
Thermal drift of offset	T _c Vof	≤± 2.0mV / °C											
Hysteresis error	V _{OH}	≤ 25mV (at If = 0A → If → 0A)											
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary											
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) Primary ⇔ Secondary											
Ambient Operating temperature	T _A	− 30℃~+ 80℃											
Ambient storage temperature	T _S	− 40℃~+ 85℃											

* 1 Vcc= + 5.0V (depending on Vcc) * 2 Offset voltage value is after removal of core hysteresis. Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

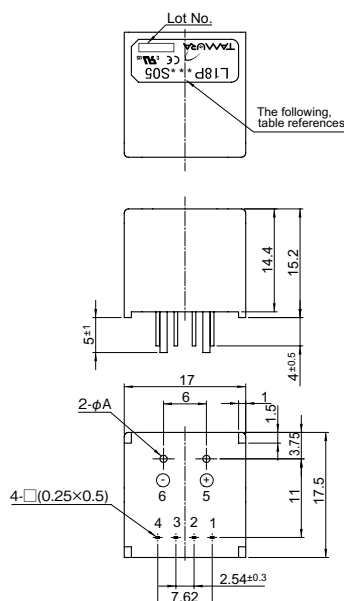


Terminal number

1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN

Current	***	φA
3A	003	φ0.6
5A	005	φ0.8
10A	010	φ1.1
15A	015	φ1.4
20A	020	φ1.6
25A	025	φ1.6
30A	030	φ1.6

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

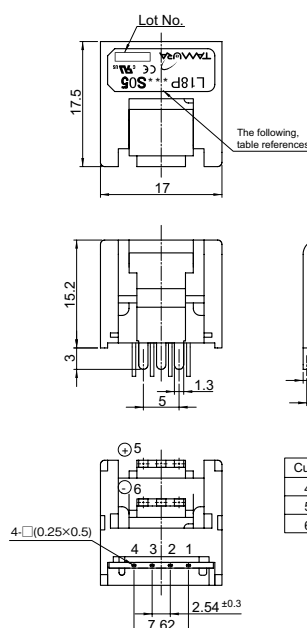

Terminal number

1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN


Current	***
40A	040
50A	050
60A	060

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System

L18P S05R SERIES

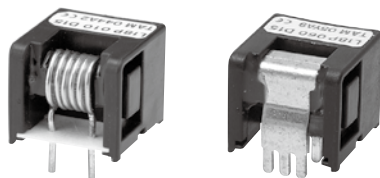

RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc= +5V

Spec		Types	L18P003 S05R	L18P005 S05R	L18P010 S05R	L18P015 S05R	L18P020 S05R	L18P025 S05R	L18P030 S05R	L18P040 S05R	L18P050 S05R	L18P060 S05R
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A	
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3			
Saturation current	If max	If × 3										
Rated output voltage	Vo	Vof + 0.625V ± 0.045V (at If)										
Offset voltage	Vof	2.5V ± 0.035V (at If = 0A) *1										
Output linearity (without offset)	ε _L	≤± 1% (at If)										
Power supply voltage	Vcc	+ 5V ± 5%										
Consumption current	Icc	≤ 15mA										
di / dt Response time	tr	≤ 5 μs (di/dt = If / μs)										
Thermal drift of gain	T _c Vo	≤± 0.1% / °C (Without T _c Vof)										
Thermal drift of offset	T _c Vof	≤± 1.0mV / °C										
Hysteresis error	V _{OH}	≤ 25mV (at If = 0A → If → 0A)										
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary										
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) Primary ⇔ Secondary										
Ambient Operating temperature	T _A	− 30°C~+ 80°C										
Ambient storage temperature	T _S	− 40°C~+ 85°C										

* 1 Offset voltage value is after removal of core hysteresis. Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

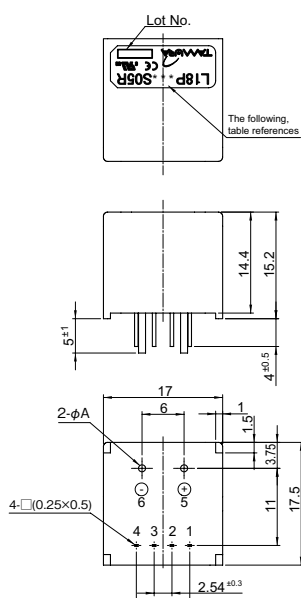


Terminal number

1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN

Current	***	φA
3A	003	φ0.6
5A	005	φ0.8
10A	010	φ1.1
15A	015	φ1.4
20A	020	φ1.6
25A	025	φ1.6
30A	030	φ1.6

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

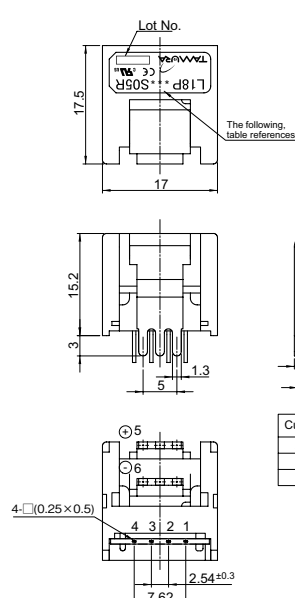

Terminal number

1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN

Current	***
40A	040
50A	050
60A	060

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System

L18P S12 SERIES




SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+12V

Spec		Types		L18P003S12	L18P005S12	L18P010S12	L18P015S12	L18P020S12	L18P025S12	L18P030S12	L18P040S12	L18P050S12	L18P060S12
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A	40A	50A	60A		
Primary wire	φ	0.6mm	0.8mm	1.1mm	1.4mm	1.6mm			bus-bar 1.0 × 6.3				
Saturation current	If max	If × 1.25											
Rated output voltage	Vo	Vof + 1.5V ± 0.045V (at If)											
Offset voltage	Vof	2.5V ± 0.035V (at If = 0A) *1											
Output linearity (without offset)	ε _L	≤± 1% (at If)											
Power supply voltage	Vcc	+ 12V ± 5%											
Consumption current	Icc	≤ 15mA											
di/dt Response time	tr	≤ 5μs (di/dt = If / μs)											
Thermal drift of gain	T _c Vo	≤± 2.0mV / °C (Without Tc Vof)											
Thermal drift of offset	T _c Vof	≤± 2.0mV / °C											
Hysteresis error	V _{OH}	≤ 25mV (at If = 0A → If → 0A)											
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Sacondary											
Insulation resistance	R _{is}	≥ 500M Ω (at DC500V) Primary ⇔ Sacondary											
Ambient Operating temperature	T _A	− 30℃~+ 80℃											
Ambient storage temperature	T _S	− 40℃~+ 85℃											

*1 Offset voltage value is after removal of core hysteresis. Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

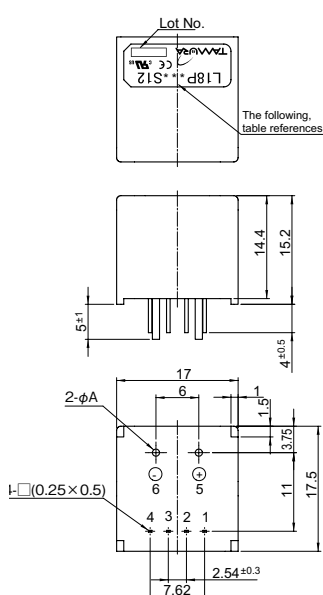


Terminal number

1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

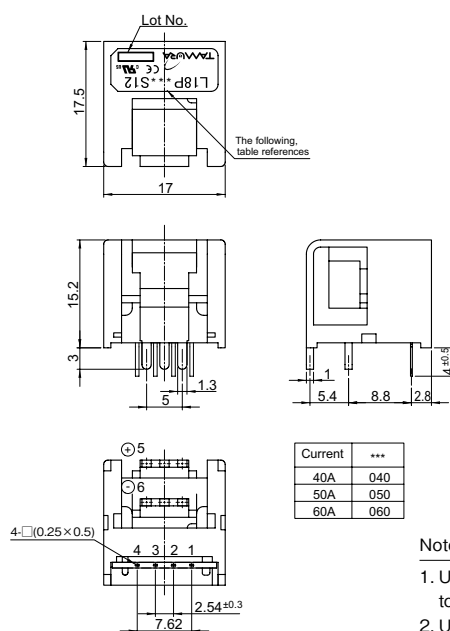

Terminal number


1. GND
2. GND
3. + Vcc
4. OUT
5. + IN
6. - IN

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System, 2 Circuits Type

L07P D15 SERIES



RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L07P003D15	L07P005D15	L07P010D15	L07P015D15	L07P020D15	L07P025D15	L07P030D15
Spec								
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A
Saturation current	If max	If × 3						
Rated output voltage	Vo	4V ± 0.060V (at If)						
Offset voltage	Vof	≤ ± 0.060V (at If = 0A) *1						
Output linearity (0A ~ If)	ε _L	≤ ± 1% (at If)						
Power supply voltage	Vcc	± 15V ± 5%						
Consumption current	Icc	≤ ± 30mA						
di/dt Response time	tr	≤ 5μs (di / dt = If / μs) *2						
Thermal drift of gain	T _C Vo	≤ 0.1% / °C (Without T _C Vof)						
Thermal drift of offset	T _C Vof	≤ ± 2.5mV / °C						
Hysteresis error	V _{OH}	≤ 30mV (at If = 0A → If → 0A)						
Insulation voltage	Vd	AC2000V for 1 minute (Sensing current 0.5mA) Primary ⇄ Sacondary						
Insulation resistance	R _{IS}	≥ 500MΩ (at DC500V) Primary ⇄ Sacondary						
Ambient Operating temperature	T _A	- 30°C ~ + 80°C						
Ambient storage temperature	T _S	- 40°C ~ + 85°C						

* 1 Offset voltage value is after removal of core hysteresis. *2 Shall be each channel's value. Other channel's input current to be 0A. *Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

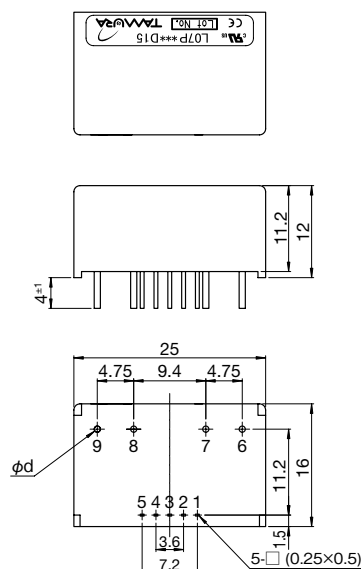

A	φd
3A	φ0.6
5A	φ0.8
10A~15A	φ1.4
20A~30A	φ1.6

Terminal number


- 1 15V
- 2 - 15V
- 3 OUT1
- 4 OUT2
- 5 GND
- 6 + IN1
- 7 - IN1
- 8 + IN2
- 9 - IN2

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Unit is [mm]

Magnetic Proportion System, 2 Circuits Type, Anti-Sulfurated

L07P D15S SERIES



RoHS

Anti-Sulfurated


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L07P003D15S	L07P005D15S	L07P010D15S	L07P015D15S	L07P020D15S	L07P025D15S	L07P030D15S
Spec								
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A
Saturation current	If max	If × 3						
Rated output voltage	Vo	4V ± 0.060V (at If)						
Offset voltage	Vof	≤ ± 0.060V (at If = 0A) *1						
Output linearity (0A ~ If)	ε _L	≤ ± 1% (at If)						
Power supply voltage	Vcc	± 15V ± 5%						
Consumption current	Icc	≤ ± 30mA						
di/dt Response time	tr	≤ 5μs (di / dt = If / μs) *2						
Thermal drift of gain	T _C Vo	≤ 0.1% / °C (Without T _C Vof)						
Thermal drift of offset	T _C Vof	≤ ± 2.5mV / °C						
Hysteresis error	V _{OH}	≤ 30mV (at If = 0A → If → 0A)						
Insulation voltage	Vd	AC2000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary						
Insulation resistance	R _{is}	≥ 500MΩ (at DC500V) Primary ⇔ Secondary						
Ambient Operating temperature	T _A	- 30°C ~ + 80°C						
Ambient storage temperature	T _S	- 40°C ~ + 85°C						

* 1 Offset voltage value is after removal of core hysteresis. * 2 Shall be each channel's value. Other channel's input current to be 0A. * Please refer to the another sheet about conditions of UL Recognition. * Anti-Sulfurated (Used resistors : Gold internal Electrodes, PCB coating : HumiSeal®) *Reliability test High Temperature and High Humidity Operation Test (85°C, 85%RH, 1500h, N=11, Pass)

DIMENSIONS (mm)

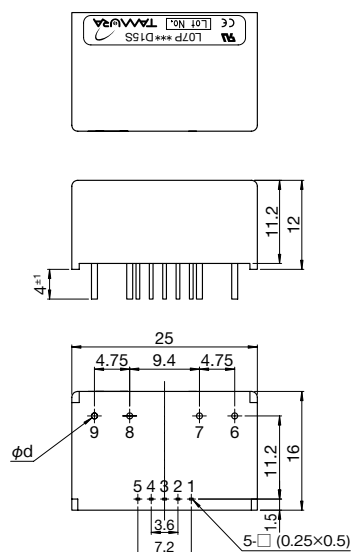

A	φd
3A	φ0.6
5A	φ0.8
10A~15A	φ1.4
20A~30A	φ1.6

Terminal number

1. + Vcc (+ 15V)
2. - Vcc (- 15V)
3. Vout 1
4. Vout 2
5. GND
6. Primary input current 1 (+)
7. Primary input current 1 (-)
8. Primary input current 2 (+)
9. Primary input current 2 (-)

Weight:


8g

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System, 2 Circuits Type

L07P S05 SERIES



RoHS

SPECIFICATIONS


Ta=25°C, RL=10kΩ, Vcc=+5V

Spec	Types	L07P003S05	L07P005S05	L07P010S05	L07P015S05	L07P020S05	L07P025S05	L07P030S05
Primary nominal current	If	3A	5A	10A	15A	20A	25A	30A
Saturation current	If max	If × 1.5						
Rated output voltage	Vo	Vof + 1.250V ± 0.040V (at If)						
Offset voltage	Vof	Vcc/2 ± 0.040V *1 (at If = 0A)						
Output linearity (0A ~ If)	εL	≤ ± 1% (at If)						
Power supply voltage	Vcc	+ 5V ± 5%						
Consumption current	Icc	≤ 30mA						
di/dt Response time	tr	≤ 5μs (di / dt = If / μs) *2						
Thermal drift of gain	TcVo	≤ 2mV / °C (Without Tc Vof)						
Thermal drift of offset	TcVof	≤ ± 2.0mV / °C MAX.						
Hysteresis error	Voh	≤ 15mV (at If = 0A → If → 0A)						
Insulation voltage	Vd	AC2000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary						
Insulation resistance	Ris	≥ 500MΩ (at DC500V) Primary ⇔ Secondary						
Ambient Operating temperature	TA	- 30°C ~ + 80°C						
Ambient storage temperature	TS	- 40°C ~ + 85°C						


* 1 Offset voltage value is after removal of core hysteresis.

* 2 Shall be each channel's value. Other channel's input current to be 0A. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)



A	φd
3A	φ0.6
5A	φ0.8
10A~15A	φ1.4
20A~30A	φ1.6

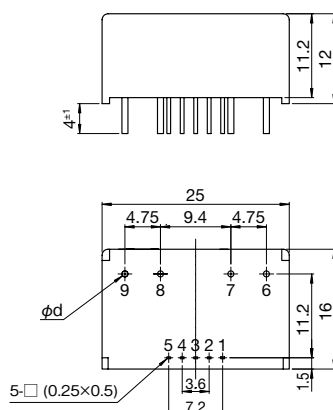

Terminal number


1. + 5V
2. NC
3. OUT1
4. OUT2
5. GND
6. + IN1
7. - IN1
8. + IN2
9. - IN2

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Magnetic Proportion System

L12P D15 SERIES



RoHS

SPECIFICATIONS



Ta=25°C, RL=10kΩ, Vcc=±15V

Spec	Types	Symbol	L12P025D15
Primary nominal current		If	25A
Primary conductor specification		—	Φ 1.4 × 2 *1
Continuous DC current		I _{con}	25A
Saturation current		If max	If × 3 *2
Rated output voltage		ε _L	4V ± 0.040V (at If)
Offset voltage		V _{of}	≤ ± 0.040V (at If = 0A) *3
Output linearity (0A ~ If)		V _{cc}	≤ ± 1% (at If)
Power supply voltage		V _{cc}	± 12V (± 5%) ~ ± 15V (± 5%)
Consumption current		I _{cc}	≤ 15mA
di/dt Response time		t _r	≤ 3μs (di/dt = If / μs)
Thermal drift of gain		T _c V _o	≤ ± 0.1% / °C (Without T _c V _{of})
Thermal drift of offset		T _c V _{of}	≤ ± 3.0mV / °C
Hysteresis error		V _{OH}	≤ 25mV (at If = 0A → If → 0A)
Insulation voltage		V _d	AC2500V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary
Insulation resistance		R _{is}	≥ 500MΩ (at DC500V) Primary ⇔ Secondary
Ambient Operating temperature		T _A	− 30°C ~ + 80°C
Ambient storage temperature		T _S	− 40°C ~ + 85°C

* 1 Conductor terminals are soldered together. * 2 Also operate at V_{cc} = ± 12V power supplies, measuring range reduced to 2.5 x If.

* 3 Offset voltage value is after removal of core hysteresis.

DIMENSIONS (mm)



Terminal number

- ① + V_{cc} (+ 15V)
- ② − V_{cc} (− 15V)
- ③ V_{out}
- ④ GND
- ⑤ Primary input current (+)
- ⑥ Primary input current (−)

Weight:


20g

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Unit is [mm]

Magnetic Proportion System / Through Type

L08P SERIES



RoHS

TAMURA recommends L08P W/IPV series as a succession model.


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L08P050D15	L08P100D15	L08P150D15	L08P200D15
Spec					
Primary nominal current	I _f	50AT	100AT	150AT	200AT
Saturation current	I _f max	≥± 150AT	≥± 300AT	≥± 450AT	≥± 450AT
Rated output voltage	V _o	4V ± 0.040V (at I _f)			
Offset voltage	V _{of}	≤ ± 0.030V (at I _f = 0A) * ¹			
Output linearity (0A ~ I _f)	ε _L	≤ ± 1% (at I _f)			
Power supply voltage	V _{cc}	± 15V ± 5%			
Consumption current	I _{cc}	± 12mA (typ) , ≤ ± 20mA			
di/dt Response time	t _r	≤ 10μs * ²			
Thermal drift of gain	T _C V _o	≤± 0.1% / °C (Without T _C V _{of})	≤± 0.05% / °C (Without T _C V _{of})		
Thermal drift of offset	T _C V _{of}	≤± 2mV / °C	≤± 1mV / °C		
Hysteresis error	V _{OH}	≤ 30mV (at I _f = 0A → I _f → 0A)	≤ 20mV (at I _f = 0A → I _f → 0A)		
Insulation voltage	V _d	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal			
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal			
Ambient Operating temperature	T _A	− 40℃~+ 80℃			
Ambient storage temperature	T _S	− 40℃~+ 85℃			

* 1 Offset voltage value is after removal of core hysteresis. * 2 The smaller one on either at di/dt = 100A/us or at di/dt = If/us.

DIMENSIONS (mm)

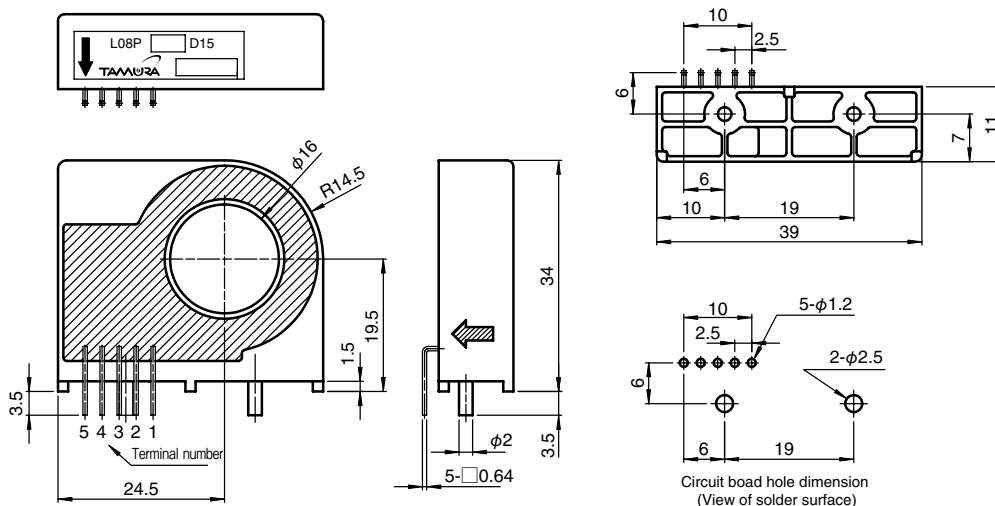

Terminal number

- 1 + Vcc (+ 15V)
- 2 - Vcc (- 15V)
- 3 Vout
- 4 GND
- 5 NC (No connection)

Weight:


20g

Note

Unless otherwise specified, tolerances shall be ± 0.5mm

Magnetic Proportion System / Through Type

L08P W/IPV SERIES



RoHS

SPECIFICATIONS


Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L08P100D15IPV	L08P200D15W	L08P300D15IPVW
Spec				
Primary nominal current	If	100AT	200AT	300AT
Saturation current	If max	≧ ± 300AT	≧ ± 600AT	≧ ± 600AT
Rated output voltage	Vo	4V ± 0.040V (at If)		
Offset voltage	Vof	≦± 0.030V (at If = 0A) ※1		
Output linearity (0A ~ If)	ε _L	≦± 1% (at If)		
Power supply voltage	Vcc	± 15V ± 5%		
Consumption current	Icc	≦± 20mA		
di/dt Response time	tr	≦ 3μs at 70% of If - 70% of Vo (di/dt=100A/μs) ≦ 5μs at 10% of If - 90% of Vo (di/dt=100A/μs)		
Thermal drift of gain	T _C Vo	≦± 0.05% / °C (Without Tc Vof)		
Thermal drift of offset	T _C Vof	≦± 1.0mV / °C (at If=0A)		
Hysteresis error	V _{OH}	≦ 20mV (at 0A → If → 0A)		
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal		
Insulation resistance	R _{IS}	≧ 500M Ω (at DC500V) inside of through hole ⇔ terminal		
Ambient Operating temperature	T _A	- 40℃~+ 80℃		
Ambient storage temperature	T _S	- 40℃~+ 85℃		


* 1 Offset voltage value is after removal of core hysteresis.

DIMENSIONS (mm)

L08P100D15IPV

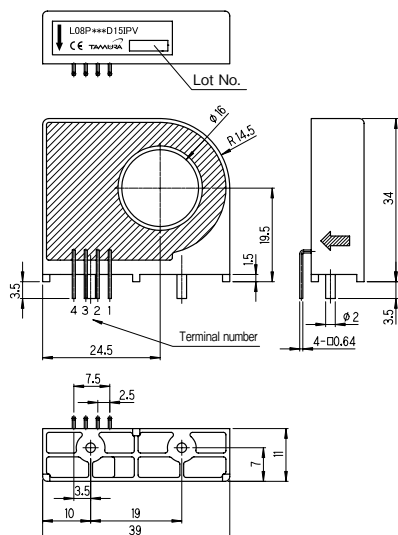

L08P200D15W, L08P300D15IPVW

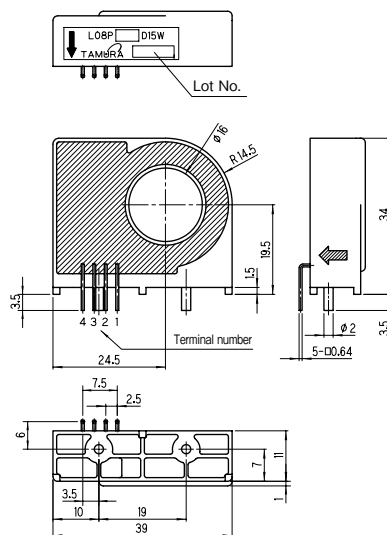

Terminal number


- 1 + Vcc (+ 15V)
- 2 - Vcc (- 15V)
- 3 Vout
- 4 GND

Weight:

20g


Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm



Magnetic Proportion System / Through Type and Busbar Type

L32P S05(B)FS SERIES

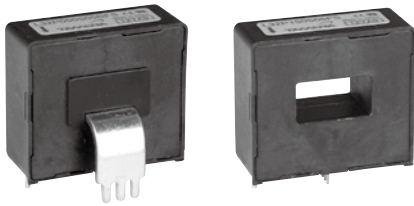

RoHS

Anti-Sulfurated


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5.0V

Spec	Types	Symbol	L32P050S05(B)FS	L32P100S05(B)FS	L32P150S05FS	L32P200S05FS	L32P300S05FS	L32P400S05FS
Primary nominal current		If	50A	100A	150A	200A	300A	400A
Saturation current		If max	≥ ± 150A	≥ ± 300A	≥ ± 450A	≥ ± 600A	≥ ± 600A	≥ ± 600A
Type		—	Through hole type : L32PxxxS05FS Bus bar type : L32PxxxS05BFS		Through hole type			
Reference Voltage		V ref	+ 2.495V ± 0.020V *1 (at Rref ≥ 1M Ω . Ouput impedance : typ 200 Ω)					
Rated output voltage		Vo	Vof + 0.625V ± 0.015 (at If)					
Offset voltage		Vof	Vref ± 0.025V (at If=0A) *2					
Output linearity (0A ~ If)		ε L	± 0.5% (at 0A, 1/2If, If)					
Power supply voltage		Vcc	+ 5V ± 5%					
Consumption current		Icc	≤ 20mA					
di/dt Response time		tr	≤ 5μs (at di/dt=100A/μs)					
Reference Temperature Characteristic		TcVref	≤ ± 0.012%/°C					
Thermal drift of gain		TcVO	≤ ± 1.5mV/°C (Without TcVof)					
Thermal drift of offset (at If=0A)		TcVof	≤± 1.0mV/°C		≤± 0.6mV/°C		≤± 0.3mV/°C	
Hysteresis error (at 0A → If → 0A)		V0H	≤± 10mV		≤± 5.0mV		≤± 2.5mV	
Insulation voltage		Vd	AC2500V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary					
Insulation resistance		RIS	≥ 500M Ω (at DC500V) Primary ⇔ Secondary					
Ambient Operating temperature		T_A	− 40 ~+ 85°C					
Ambient storage temperature		Ts	− 40 ~+ 85°C					

* 1 It is possible to change Vof with an external reference voltage (between 1.5V - 2.8V providing its ability to sink or source approximately 5 mA.) . If the external reference voltage is not used, the Vref pin should be left unconnected. * 2 Offset voltage value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition. * Anti-Sulfurated (Used resistors : Gold internal Electrodes) * Ferrite core is used.

DIMENSIONS (mm)

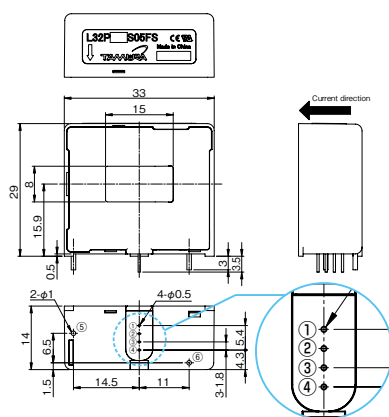

Terminal number


- ① Vcc (+5V)
- ② GND
- ③ Vout
- ④ Vref (IN/OUT)
- ⑤⑥ NC

Weight

22g

Note

1. Unless otherwise specified, tolerances shall be ±0.5mm
2. Unit is [mm]

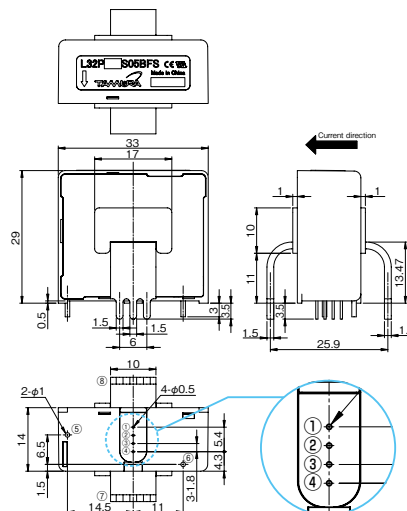

Terminal number

- ① Vcc (+5V)
- ② GND
- ③ Vout
- ④ Vref (IN/OUT)
- ⑤⑥ NC
- ⑦ Primary input current (+)
- ⑧ Primary input current (-)

Weight


30g

Note

1. Unless otherwise specified, tolerances shall be ±0.5mm
2. Unit is [mm]

Magnetic Proportion System / Through Type

L01Z SERIES



RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5V

Types		L01Z050S05	L01Z100S05	L01Z150S05	L01Z200S05	L01Z300S05	L01Z400S05	L01Z500S05	L01Z600S05
Spec									
Primary nominal current	If	50AT	100AT	150AT	200AT	300AT	400AT	500AT	600AT
Saturation current	If max	If × 1.25							
Rated output voltage	Vo	Vref + 1.5V ± 0.045V (at If)	Vref + 1.5V ± 0.035V (at If)						
Saturation output voltage	Vo min/max	Vo min ≤ 0.5V, 4.5V ≤ Vo max							
Offset voltage * 1	Vof	Vref ± 0.035V (at If = 0A)	Vref ± 0.030V (at If = 0A)						
Output linearity (0A ~ If)	ε _L	≤ ± 1% (at If)							
Power supply voltage	Vcc	+ 5V ± 2%							
Consumption current	Icc	≤ 15mA							
di/dt Response time	tr	≤ 10μs (di/dt = 100A /μs)							
Thermal drift of gain	T _c Vo	≤ ± 2mV / °C (Without Tc Vof)	≤ ± 1.5mV / °C (Without Tc Vof)						
Thermal drift of offset	T _c Vof	≤ ± 2mV / °C	≤ ± 1mV / °C						
Hysteresis error	V _{OH}	≤ 8mV (at If = 0A → If → 0A)			≤ 4mV (at If = 0A → If → 0A)		≤ 6mV (at If = 0A → If → 0A)		
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal							
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal							
Ambient Operating temperature	T _A	− 20°C ~ + 80°C							
Ambient storage temperature	T _S	− 40°C ~ + 85°C							

* 1 Vref=Vcc/2

DIMENSIONS (mm)

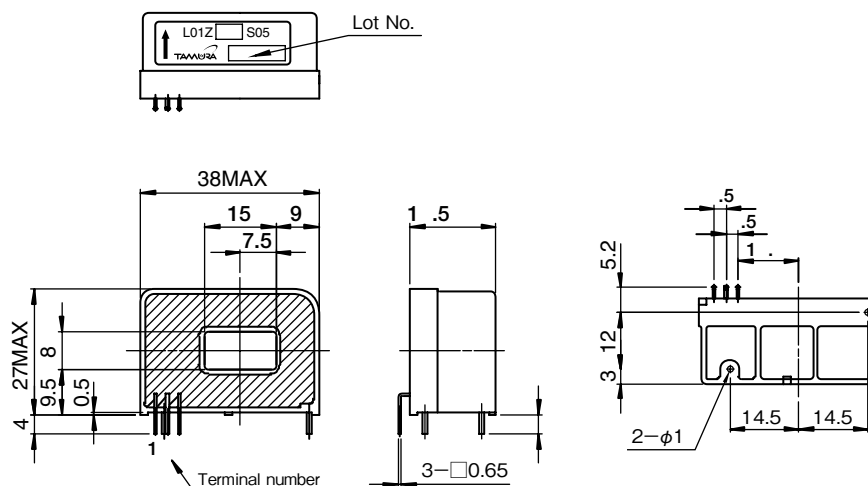

Terminal number

- 1 Vout
- 2 GND
- 3 + Vcc (+ 5V)

Weight:

45g

Note

Unless otherwise specified, tolerances shall be ± 0.5mm

Magnetic Proportion System / Through Type

L37S D15 SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V_{CC}	V	$\pm 18V$	

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	Vd	—	AC3600V, for 1minute (Sensing current 0.5mA)	Primary $\leftrightarrow$ Secondary
Impulse withstand voltage	Vw	kV	6.6	Primary $\leftrightarrow$ Secondary Input waveform : • Front time 1.2 μ s • Time to half value 50 μ s • single
Insulation resistance	R_{IS}	—	$\geq 1000M \Omega$ (at DC500V)	Primary $\leftrightarrow$ Secondary
Clearance distance	dCi	—	6.5mm (MIN)	Primary $\leftrightarrow$ Secondary
Creepage distance	dCp	—	6.5mm (MIN)	Primary $\leftrightarrow$ Secondary
Case material	—	—	UL94 V-0	
Comparative tracking index; (CTI)	CTI	V	200 (group IIIa)	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN50178, IEC/EN 61010-1
	—	—	600V, CAT III, PD2	Basic isolation, non uniform field according to EN50178, IEC/EN 61010-1

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T_a	$^{\circ}C$	- 40		+ 85	
Ambient storage temperature	T_s	$^{\circ}C$	- 40		+ 85	
Mass	m	g		62		

SPECIFICATIONS

Ta=+25°C, RL=10kΩ, V_{CC}=±15V

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Primary nominal current	L37S050D15 *	If	A		Ifmax		
	L37S100D15 *				100		
	L37S200D15 *				200		
	L37S300D15 *				300		
	L37S400D15 *				400		
	L37S500D15 *				500		
	L37S600D15 *				600		
Saturation current *1	L37S050D15 *	Ifmax	A	150			
	L37S100D15 *			300			
	L37S200D15 *			600			
	L37S300D15 *			900			
	L37S400D15 *			1000			
	L37S500D15 *			1000			
	L37S600D15 *			1000			
Power supply voltage *2		V _{CC}	V	± 12 (± 5%)	± 15 (± 5%)		
Consumption current		I _{CC}	mA		15	20	
Rated output voltage		V _O	V	3.960	4.000	4.040	at If
Offset voltage	L37S050D15 *	V _{OF}	V	− 0.030	0.000	+ 0.030	at If = 0A
	L37S100D15 *			− 0.020	0.000	+ 0.020	
	L37S200D15 *			− 0.020	0.000	+ 0.020	
	L37S300D15 *			− 0.020	0.000	+ 0.020	
	L37S400D15 *			− 0.020	0.000	+ 0.020	
	L37S500D15 *			− 0.020	0.000	+ 0.020	
	L37S600D15 *			− 0.020	0.000	+ 0.020	
Hysteresis error		V _{OH}	mV			± 20	at 0A → If → 0A
Thermal drift of gain		TcV _O	%/°C			± 0.1	Without TcV _{OF}
Thermal drift of offset	L37S050D15 *	TcV _{OF}	mV/°C			± 2	at If = 0A
	L37S100D15 *					± 1	
	L37S200D15 *					± 1	
	L37S300D15 *					± 1	
	L37S400D15 *					± 1	
	L37S500D15 *					± 1	
	L37S600D15 *					± 1	
Output linearity (0A ~ If)		ε _L	%	− 1		+ 1	
Response time (@90% of If)		tr	μs			3	di/dt=100A/μs

* 1 If the product of 300A or less operate at V_{CC} = ± 12V power supplies, measuring range reduced to 2.5 x If.

* 2 The power on rise time should be less than 45ms at time from 0 to + 11V.

Current sensor may not operate normally because EEPROM in sensor does not work normally.


* 3 Offset voltage value is after removal of core hysteresis.

STANDARDS

EN50178 , IEC/EN 61010-1 , IEC/EN 62109-1 , UL508 (file No. E243511)


※ Please refer to the another sheet about conditions of UL Recognition.

CONNECTION

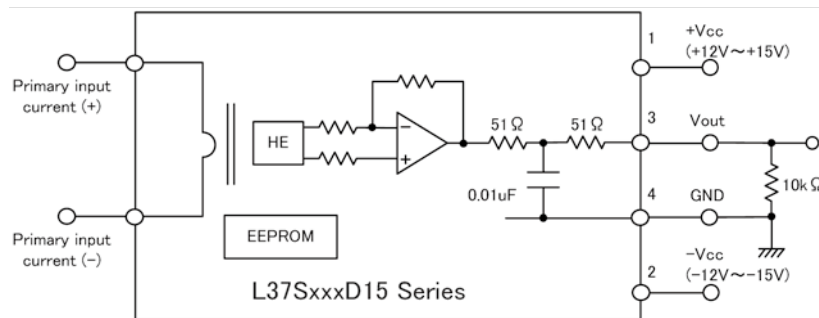


DIMENSIONS (mm)

L37SxxxD15M

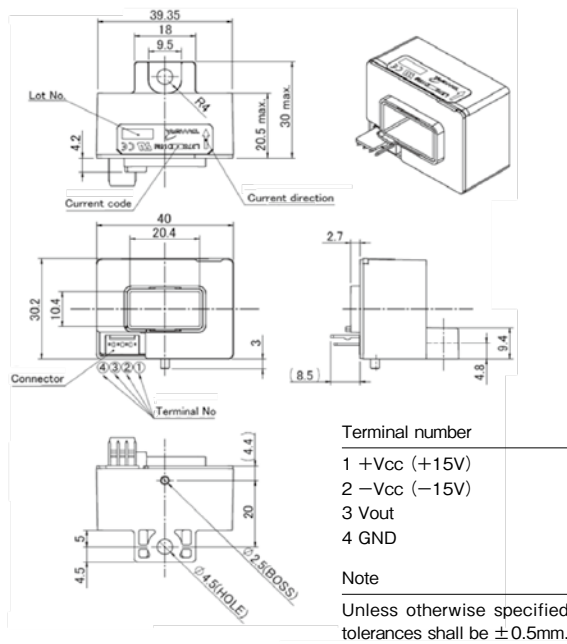

L37SxxxD15J

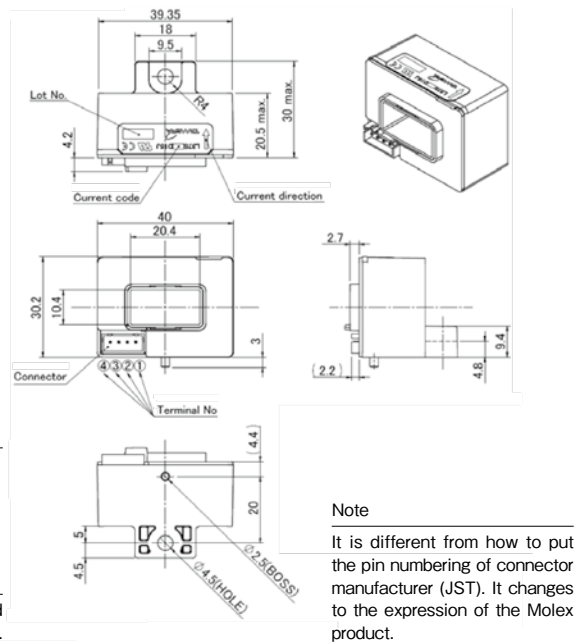

Order number and Connector number (terminal plating)

Types		Connector			
		Manufacturer	Part Number	Old Part Number	Plating of terminal
L37SxxxD15J	Standard	JST	B4B-XH-A-G	—	Gold
L37SxxxD15M	Standard	Molex	22-04-1041	5045-04A	Sn
L37SxxxD15M-A	Build to Order		22-11-1041	5045-04AG	Gold

As for the L37SxxxD15M series of a gold-plated connector, '-A' attaches to the end of the product name.

Magnetic Proportion System / Through Type

L03S SERIES



RoHS

TAMURA recommends L37S series as a succession model.


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L03S050D15	L03S100D15	L03S200D15	L03S300D15	L03S400D15	L03S500D15	L03S600D15
Spec								
Primary nominal current	If	50AT	100AT	200AT	300AT	400AT	500AT	600AT
Saturation current	If max	≥± 150AT	≥± 300AT	≥± 600AT	≥± 700AT	≥± 700AT	≥± 700AT	≥± 700AT
Output voltage	Vo	4V ± 0.040V (at If)						
Offset voltage *1	Vof	≤± 0.040V (at If=0A)	≤± 0.030V (at If=0A)					
Output linearity (without offset)	ε _L	≤ ± 1% (at If)						
Power supply voltage	Vcc	± 15V ± 5%						
Consumption current	Icc	± 12mA (typ) , ≤ ± 20mA						
di/dt Response time *2	tr	≤ 10μs						
Thermal drift of gain	T _C Vo	≤± 0.1% / °C (without Tc Vof)						
Thermal drift of offset	T _C Vof	≤± 2mV / °C	≤± 1mV / °C					
Hysteresis error	V _{OH}	≤ 20mV (at If = 0A → If → 0A)						
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal						
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) , inside of through hole ⇔ terminal						
Ambient Operating temperature	T _A	- 20℃~+ 80℃						
Ambient storage temperature	T _S	- 40℃~+ 90℃						


* 1 Offset voltage value is after removal of core hysteresis. * 2 The smaller one on either at di/dt = 100A/us or at di/dt = If/us.

DIMENSIONS (mm)

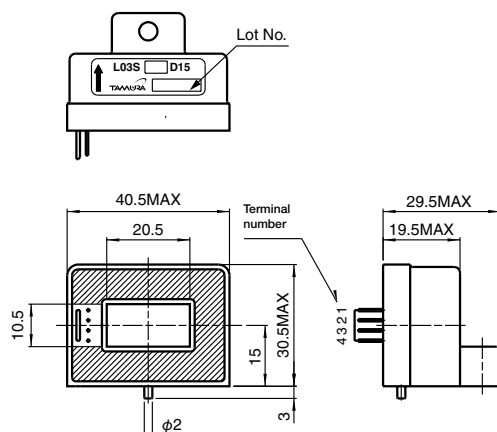


Types		Connector			
		Manufacturer	Part Number	Old Part Number	Plating of terminal
L03SxxxD15	Standard	Molex	22-04-1041	5045-04A	Sn
L03SxxxD15-A	Build to Order		22-11-1041	5045-04AG	Gold

As for the product of a gold-plated connector, 'A' attaches to the end of the product name.



Recommended PCB holes



Terminal number

- 1 + Vcc (+ 15V)
- 2 - Vcc (- 15V)
- 3 Vout
- 4 GND

Weight:

50g

Note

- 1. Unless otherwise specified, tolerances shall be 0.5mm

Magnetic Proportion System / Through Type

L03S D15W SERIES



RoHS

TAMURA recommends L37S series as a succession model.

SPECIFICATIONS


Ta=25°C, RL=10kΩ, Vcc=±15V

Types		L03S050D15W	L03S100D15W	L03S200D15W	L03S300D15W	L03S400D15W	L03S500D15W	L03S600D15W	L03S700D15W	L03S800D15W
Spec										
Primary nominal current	If	50AT	100AT	200AT	300AT	400AT	500AT	600AT	700AT	800AT
Saturation current * 1	If max	≥± 150AT	≥± 300AT	≥± 600AT	≥± 900AT	≥± 1000AT				
Output voltage	Vo	4V ± 0.040V (at If)								
Offset voltage * 2	Vof	≤± 0.040V (at If=0A)	≤± 0.030V (at If = 0A)							
Output linearity (without offset)	ε _L	≤± 1% (at If)								
Power supply voltage	Vcc	± 12V (± 5%) ~± 15V (± 5%)								
Consumption current	Icc	≤± 20mA								
di/dt Response time * 3	tr	≤ 5us (at 90% of If - 90% of Vo) , ≤ 10us (at 10% of If - 90% of Vo)								
Thermal drift of gain	T _C Vo	≤ 0.1% / °C (Without Tc Vof)								
Thermal drift of offset	T _C Vof	≤± 2mV / °C	≤± 1mV / °C							
Hysteresis error	V _{OH}	≤ 20mV (at If = 0A → If → 0A)								
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal								
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) , inside of through hole ⇔ terminal								
Ambient Operating temperature	T _A	- 20°C~+ 80°C								
Ambient storage temperature	T _S	- 40°C~+ 85°C								


* 1 If the product of 300A or less operate at Vcc = ± 12V power supplies, measuring range reduced to 2.5 x If. * 2 Offset voltage value is after removal of core hysteresis.
* 3 The smaller one on either at di/dt = 100A/us or at di/dt = If/us.

DIMENSIONS (mm)

L03S***D15WM

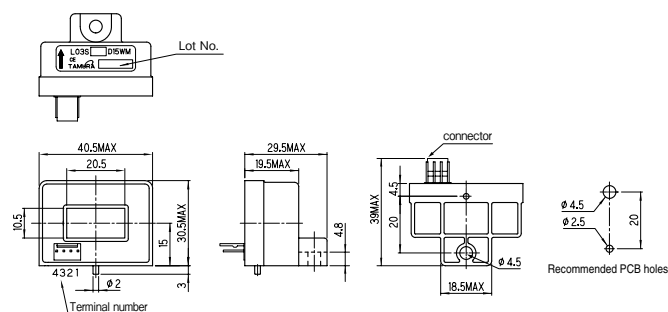

L03S***D15WJ

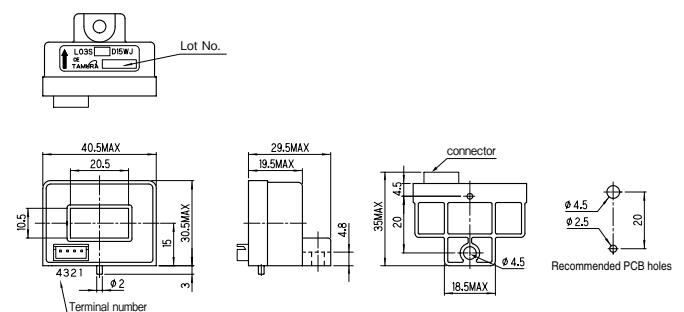

Types		Connector			
		Manufacturer	Part Number	Old Part Number	Plating of terminal
L03SxxxD15WJ	Standard	JST	B4B-XH-A-G	-	Gold
L03SxxxD15WM	Standard	Molex	22-04-1041	5045-04A	Sn
L03SxxxD15WM-A	Build to Order		22-11-1041	5045-04AG	Gold

As for L03SxxxD15WM of a gold-plated connector, 'A' attaches to the end of the product name.

Terminal number

1 + Vcc (+ 15V)
2 - Vcc (- 15V)
3 Vout
4 GND
Note

Weight

50g

1. Unless otherwise specified, tolerances shall be ± 0.5mm

Magnetic Proportion System / Through Type

L31S S05FS SERIES



RoHS

Anti-Sulfurated


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5.0V

Spec	Types	Symbol	L31S050S05FS	L31S100S05FS	L31S200S05FS	L31S300S05FS	L31S400S05FS	L31S500S05FS	L31S600S05FS
Primary nominal current	If		50A	100A	200A	300A	400A	500A	600A
Saturation current	If max		≥ ± 150A	≥ ± 300A	≥ ± 600A	≥ ± 900A	≥ ± 900A	≥ ± 900A	≥ ± 900A
Reference Voltage	V ref		+ 2.495V ± 0.020V *1 (at Rref ≥ 1M Ω . Ouput impedance : typ 200 Ω)						
Rated output voltage	Vo		Vof + 0.625V ± 0.015V (at If)						
Offset voltage	Vof		Vref ± 0.025V (at If=0A) *2						
Output linearity (0A ~ If)	ε _L		± 0.5% (at 0A, 1/2If, If)						
Power supply voltage	Vcc		+ 5V ± 5%						
Consumption current	Icc		≤ 20mA						
di/dt Response time	tr		≤ 5μs (at di/dt=100A/μs)						
Reference Temperature Characteristic	T _C VO		≤ ± 0.012%/°C						
Thermal drift of gain	T _C Vof		≤ ± 1.5mV/°C (Without TcVof)						
Thermal drift of offset (at If=0A)	V _{OH}		≤ ± 1.0mV/°C			≤ ± 0.3mV/°C			
Hysteresis error (at 0A → If → 0A)	Vd		≤± 10mV			≤± 2.5mV			
Insulation voltage	R _{IS}		AC3300V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary						
Insulation resistance	T _A		≥ 500M Ω (at DC500V) Primary ⇔ Secondary						
Ambient Operating temperature	T _S		− 40 ~+ 85°C						
Ambient storage temperature	Ts		− 40 ~+ 85°C						

* 1 It is possible to change Vof with an external reference voltage (between 1.5V - 2.8V providing its ability to sink or source approximately 5 mA.) . If the external reference voltage is not used, the Vref pin should be left unconnected. * 2 Offset voltage value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition. * Anti-Sulfurated (Used resistors : Gold internal Electrodes) * Ferrite core is used.

DIMENSIONS (mm)

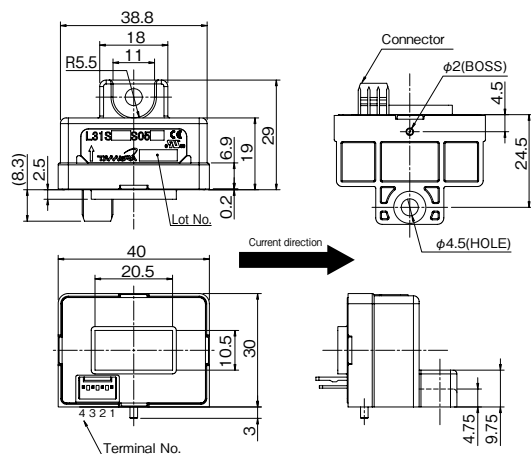


Types		Connector			
		Manufacturer	Part Number	Old Part Number	Plating of terminal
L31SxxxS05FS	Standard	Molex	22-04-1041	5045-04A	Sn
L31SxxxS05FS-A	Build to Order		22-11-1041	5045-04AG	Gold

As for the product of a gold-plated connector, 'A' attaches to the end of the product name.

Terminal number	Note
1 Vref (IN/OUT)	1. Unless otherwise specified, tolerances shall be ±0.5mm 2. Unit is [mm]
2 Vout	
3 GND	
4 +Vcc (+5V)	
Weight	
38g	

Recommended PCB holes



Magnetic Proportion System / Through Type

L06P S05 SERIES



RoHS



SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5V

Types		L06P300S05	L06P400S05	L06P600S05	L06P800S05
Spec					
Primary nominal current	If	300AT	400AT	600AT	800AT
Saturation current	If max	$\geq I_f \times 1.33$			
Rated output voltage	Vo	$V_{ref} + 1.5V \pm 0.035V$ (at If) *1			
Offset voltage	Vof	$V_{ref} \pm 30mV$ *2			
Output linearity (0A ~ If)	ϵ_L	$\leq \pm 1\%$ (at If)			
Power supply voltage	Vcc	$+5V \pm 0.1V$			
Consumption current	Icc	$\leq 15mA$			
di/dt Response time	tr	$\leq 5\mu s$ (at di/dt = 100A /μs)			
Thermal drift of gain	TcVo	$\leq \pm 1.5mV/^\circ C$ (Without Tc Vof)			
Thermal drift of offset	TcVof	$\leq \pm 1.0mV/^\circ C$ (at If = 0A)			
Hysteresis error	VOH	$\leq 10mV$ (at If = 0A → If → 0A)			
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary			
Insulation resistance	RIS	$\geq 500M\Omega$ (at DC500V) Primary ⇔ Secondary			
Ambient Operating temperature	TA	$-40^\circ C \sim +85^\circ C$			
Ambient storage temperature	TS	$-40^\circ C \sim +85^\circ C$			

* 1 Vref=Vcc/2 * 2 Offset voltage value is after removal of core hysteresis.

DIMENSIONS (mm)



Terminal number



- 1 OUTPUT
- 2 GND
- 3 + 5V

Weight:

65 ± 5g

Note

- 1. Unless otherwise specified, tolerances shall be ±0.5mm

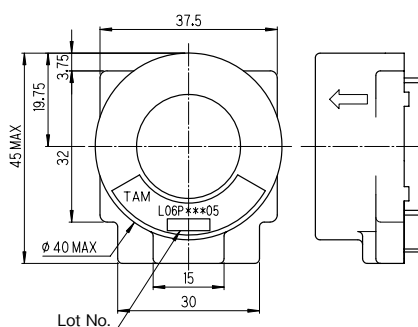

Magnetic Proportion System / Through Type

L05Z SERIES




RoHS

SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=±15V

Spec	Types	L05Z800S15
Primary nominal current	If	800AT
Saturation current	If max	≥ ± 900AT
Rated output voltage	Vo	11V ± 0.11V (at If)
Offset voltage	Vof	+ 7V ± 50mV (If = 0A)
Output linearity (0A ~ If)	ε _L	± 1% (at If)
Power supply voltage	Vcc	+ 15V ± 5%
Consumption current	Icc	≤ 20mA
di/dt Response time	tr	≤ 10μs (at di/dt = 100A / μs)
Thermal drift of gain	T _C Vo	± 0.1% / °C (Without T _C Vof)
Thermal drift of offset	T _C Vof	± 1.0mV / °C
Hysteresis error	V _{OH}	≤ 20mV (at If = 0A → If → 0A)
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal
Insulation resistance	R _{IS}	≥ 500MΩ (at DC500V) inside of through hole ⇔ terminal
Ambient Operating temperature	T _A	− 40°C ~ + 85°C
Ambient storage temperature	T _S	− 40°C ~ + 85°C

DIMENSIONS (mm)

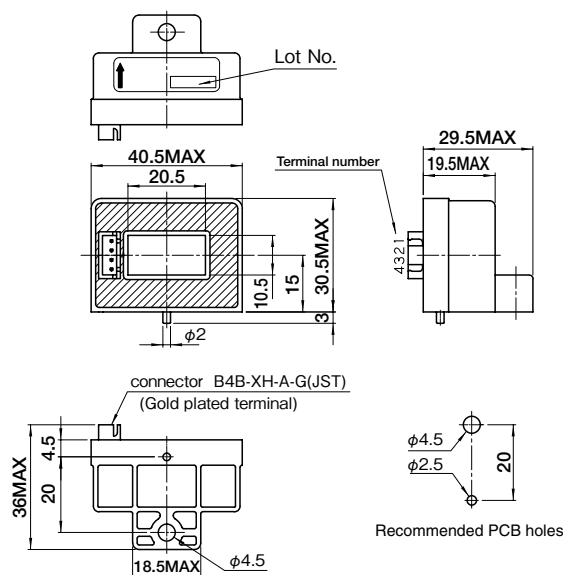

Terminal number

- 1 + Vcc
- 2 GND
- 3 OUT
- 4 GND

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Mass is 50 ± 5g.

Magnetic Proportion System

L34S D15 SERIES




SPECIFICATIONS

$T_a=25^{\circ}\text{C}$, $R_L=10\text{k}\Omega$, $V_{CC}=+5.0\text{V}$

[illegible]

* 1 If the product of 800A or less operate at $V_{cc} = \pm 12V$ power supplies, measuring range reduced to $2.5 \times I_f$. * 2 Offset voltage value is after removal of core hysteresis. * 3 Measurement condition: Primary conductor cross sectional area is as same as through hole, and penetration with 1turn in through hole. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

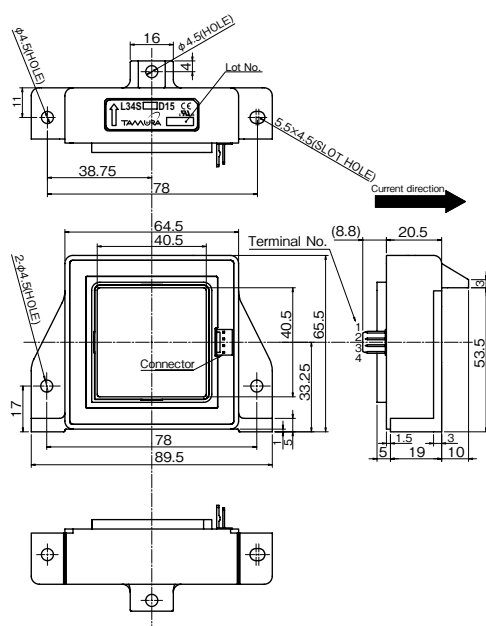

Types		Connector			
		Manufacturer	Part Number	Old Part Number	Plating of terminal
L34SxxxD15	Standard	Molex	22-04-1041	5045-04A	Sn
L34SxxxD15-A	Build to Order		22-11-1041	5045-04AG	Gold

As for the product of a gold-plated connector, '-A' attaches to the end of the product name.

Terminal number
1 +Vcc (+15V)
2 -Vcc (-15V)
3 Vout
4 GND

Weight


165g

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$

Magnetic Proportion System / Compact size and High-speed response

LA01P SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V_{DD}	V	6	
Jumper temperature	—	°C	120	
Output current	I_{out}	mA	± 1	Recommend ; $< \pm 0.5\text{mA}$
	—	kV	2	$C=100\text{pF}$, $R=1.5\text{k}\Omega$

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V_d	V	$\geq \text{AC2500V}$, 50/60Hz, for 1minute(Sensing current 0.5mA)	Primary $\leftrightarrow$ Secondary
Impulse withstand voltage	V_w	kV	2.5	Primary $\leftrightarrow$ Secondary Input waveform: •Front time 1.2 μs •Time to half value 50 μs •single
Clearance distance	d_{Ci}	mm	2.7	Primary $\leftrightarrow$ Secondary
Creepage distance	d_{Cp}	mm	2.7	Primary $\leftrightarrow$ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index; (CTI)	CTI	V	200	

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T_a	°C	-40		+90	
Ambient storage temperature	T_s	°C	-40		+125	
Mass	m	g		5		

SPECIFICATIONS

$T_a=+25^\circ\text{C}$, $V_{DD}=+5\text{V}$, $R_L \geq 10\text{M}\Omega$

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Measurement current range	LA01P035S05	I_f	A	-35		35	
	LA01P046S05			-46		46	
	LA01P054S05			-54		54	
	LA01P085S05			-85		85	
Maximum primary current (RMS)		$I_{P(RMS)max}$	A			50	*1
Supply Voltage		V_{DD}	V	4.5	5.0	5.5	
Number of primary turns		N_p	T	1			
Primary Jumper resistance		R_p	$\text{m}\Omega$		0.10		
Current consumption (at $I_p=0\text{A}$)		I_{DD}	mA			10	


*1: When $I_{P(RMS)max}$ is bigger than the value of I_f , $I_{P(RMS)max}$ restricts it to the value of I_f .

SPECIFICATIONS



 $T_a = +25^{\circ}\text{C}$, $V_{DD} = +5\text{V}$, $R_L \geq 10\text{M}\Omega$

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Offset voltage	LA01P035S05	V _{of}	V	2.408	2.500	2.592	
	LA01P046S05			2.423	2.500	2.577	
	LA01P054S05			2.432	2.500	2.568	
	LA01P085S05			2.451	2.500	2.549	
Temperature drift of offset voltage (at $T_a = -40 \sim +90^{\circ}\text{C}$, Variation from V _{of} ($T_a = 35^{\circ}\text{C}$), I _p =0A)	LA01P035S05	TCV _o	mV		± 21.5		
	LA01P046S05				± 17.0		
	LA01P054S05				± 14.0		
	LA01P085S05				± 9.0		
Sensitivity	LA01P035S05	G	mV/A	58.8	60.0	61.2	
	LA01P046S05			44.1	45.0	45.9	
	LA01P054S05			39.2	40.0	40.8	
	LA01P085S05			24.5	25.0	25.5	
Temperature coefficient 1 of Sensitivity (at $T_a = +35 \sim +90^{\circ}\text{C}$, Variation ratio to G($T_a = 35^{\circ}\text{C}$))	LA01P035S05	TCG1	%		± 1		
	LA01P046S05				± 2		
	LA01P054S05				± 1		
	LA01P085S05				± 1		
Temperature coefficient 2 of Sensitivity (at $T_a = -40 \sim +35^{\circ}\text{C}$, Variation ratio to G($T_a = 35^{\circ}\text{C}$))		TCG2	%		± 2		
Output Linearity(at 0... I _f)		ε_L	%	-1		1	
Output noise voltage		V _{NRMS}	mVrms			2.1	
Ratiometric error of sensitivity		V _{G-R}	%	-1		1	
Ratiometric error of offset voltage		V _{of-R}	%	-1		1	
Response time 1 (at 90% of I _f)		t _r	μs		1		CL=100pF
Frequency bandwidth(-3dB)		BW	kHz		400		CL=100pF

FUNCTIONAL BLOCK DIAGRAM

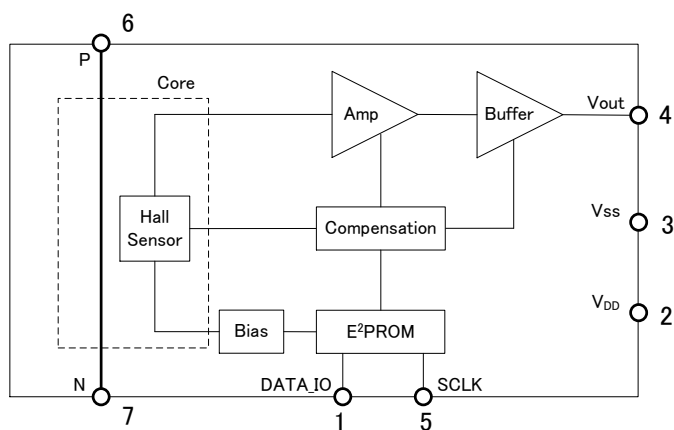


CHARACTERISTIC CURVE(TYP) AND PRIMARY CURRENT DERATING CURVE

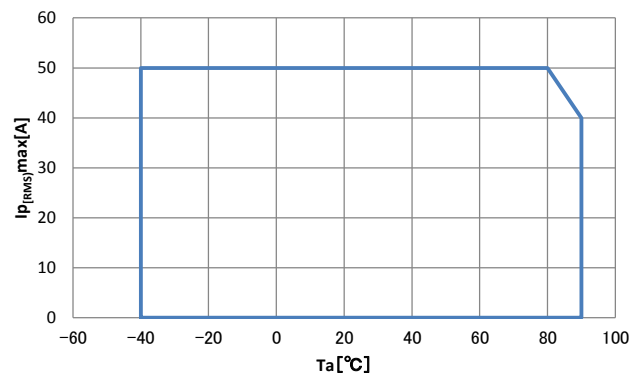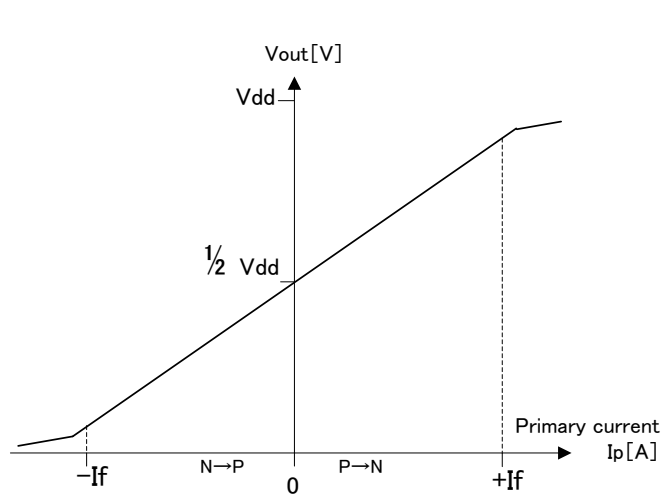

Conditions: Mounted on the test board complying with the EIA/JEDEC Standards (EIA/JESD51.)

CHARACTERISTICS DEFINITIONS

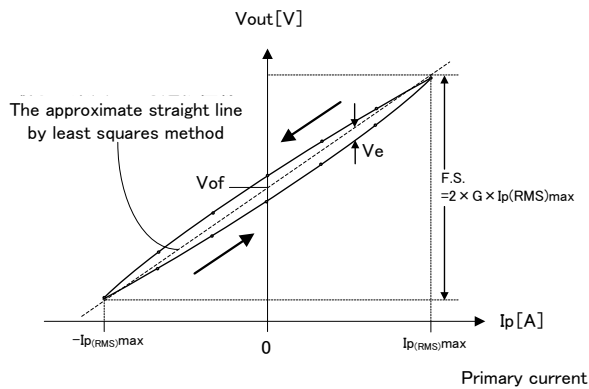

•When $I_{p(RMS)max}$ is bigger than the value of I_f , $I_{p(RMS)max}$ restricts it to the value of I_f .

•Sensitivity G [mV/A], Offset voltage V_{of} [V]

Sensitivity (G) is defined as slope of the approximate straight line by least squares method, using the data of the output voltage (V_{out}) when sweeping the measured current I_p at rated current range. Also Offset voltage (V_{of}) is defined as the intercept of the approximate straight line.

•Output linearity ε_L [%]

Output linearity (ε_L) is defined as the ratio of maximum error voltage (V_e) to the full scale (F.S.), where V_d is maximum difference between the Output voltage (V_{out}) and the approximate straight line calculated in the sensitivity and offset voltage definition;

$$\varepsilon_L = V_e / F.S. \times 100$$

•Ratiometric error of sensitivity V_{G-R} [%], ratiometric error of Offset voltage V_{of-R} [%]

Output of LA01P Series is ratiometric.


Sensitivity (G) and Offset voltage (V_{of}) are proportional to Supply voltage (V_{DD}).

Ratiometric error is defined as follows in the supply voltage range ($4.5V < V_{DD1} < 5.5V$);

$$V_{G-R} = 100 \times [(G(V_{DD}=V_{DD1}) / G(V_{DD}=5V)) - (V_{DD1} / 5)] / (V_{DD1} / 5)$$


$$V_{of-R} = 100 \times [V_{of}(V_{DD}=V_{DD1}) - V_{of}(V_{DD}=5V) \times (V_{DD1} / 5)] / F.S.$$

TERMINAL DESCRIPTIONS



Terminal No.	
1	: DATA_IO Test pin(connect to GND)
2	: V _{DD} Power supply(5V)
3	: V _{SS} GND(0V)
4	: Vout Analog output
5	: SCLK Test pin(connect to GND)
6	: P Input
7	: N Output


DIMENSIONS (mm)

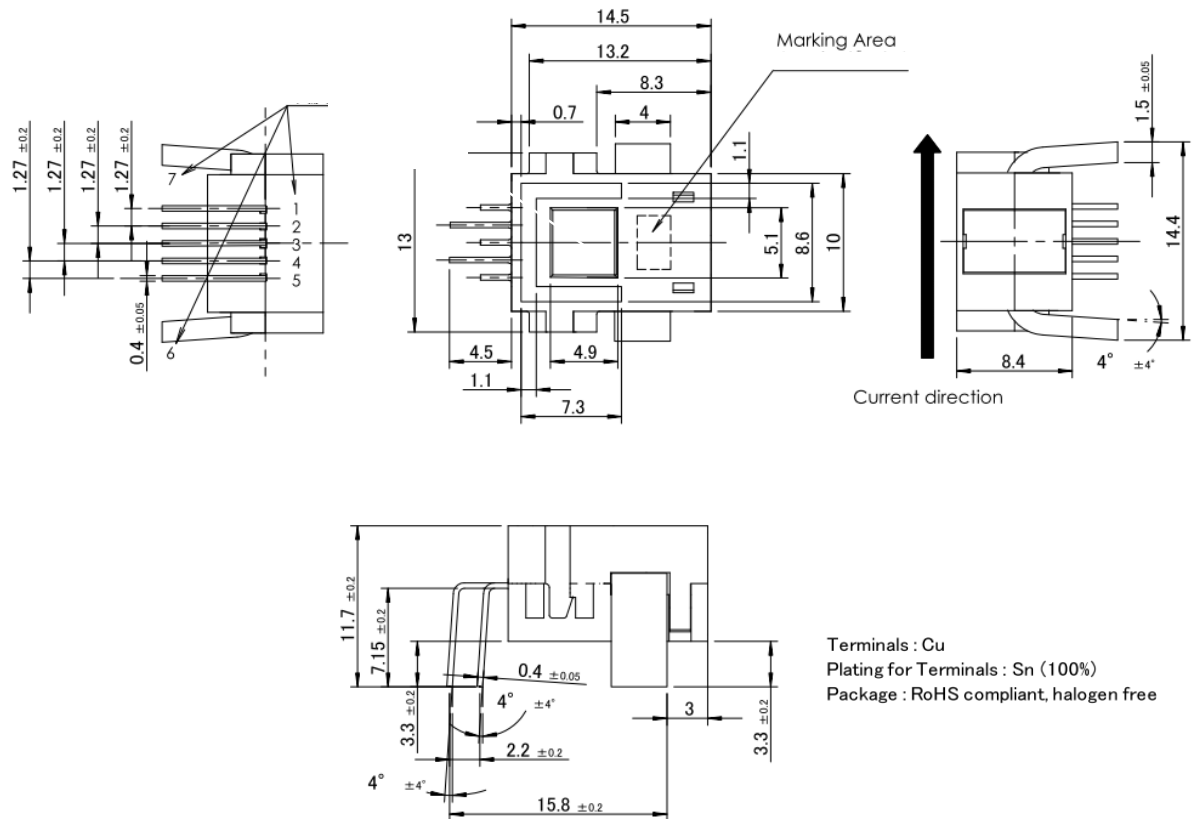

Terminals : Cu
Plating for Terminals : Sn (100%)
Package : RoHS compliant, halogen free


Note1) The tolerances of dimensions without any mention are $\pm 0.1\text{mm}$.

RECOMMENDED THROUGH-HOLE LAYOUTS (mm)

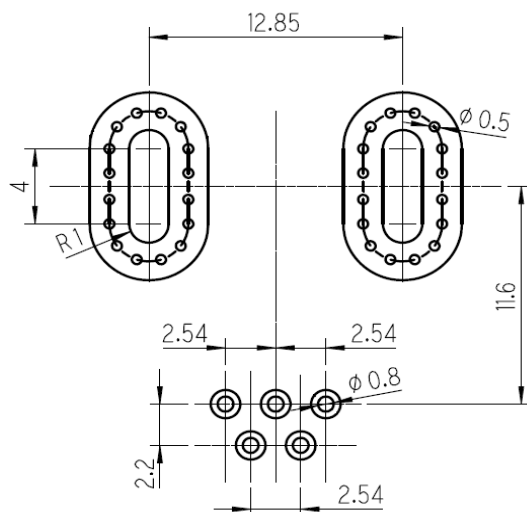

Note) If 2 or more trace layers are used as the current path, please make enough number of through-holes to flow current between the trace layers.

TYPICAL APPLICATION

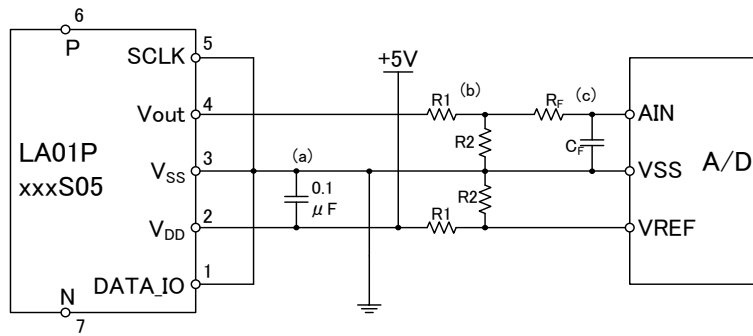

- (a) Please be placed the bypass capacitor $0.1 \mu F$ as close as possible to the V_{DD} and V_{SS} pins of LA01P Series.
- (b) LA01P Series have a ratiometric output. When received output by the A / D converter, it is possible to reduce the A / D conversion error due to supply voltage fluctuations by setting a common voltage level of the A / D converter and supply voltage.
The resistive divider with R1 and R2 is required, if the reference voltage of the A / D converter is lower than +5V.
- (c) If necessary, please insert a low-pass filter to Vout.


TYPE DESIGNATION

LA01 P * * * S 05
 ① ② ③ ④ ⑤

- ① Model (4 figures)
LA01 : Series
- ② Mounting configuration (1 figure)
P : PCB Mounting type
- ③ Measurement current range (3 figures)
Ex) 035 : 35A 085 : 85A
- ④ Control power supply type (1 figure)
S : Single supply
- ⑤ Power supply voltage (2 digits)

Magnetic Proportion System / Compact size and High-speed response

LA01M SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V_{DD}	V	6	
Jumper temperature	—	°C	120	
Output current	I_{out}	mA	± 1	Recommend ; $< \pm 0.5\text{mA}$
ESD rating (HBM: Human Body Model)	—	kV	2	$C=100\text{pF}$, $R=1.5\text{k}\Omega$

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V_d	V	$\geq \text{AC}2500\text{V}$, 50/60Hz, for 1minute (Sensing current 0.5mA)	Primary $\leftrightarrow$ Secondary
Impulse withstand voltage	V_w	kV	2.5	Primary $\leftrightarrow$ Secondary Input waveform : • Front time 1.2 μs • Time to half value 50 μs • single
Clearance distance	d_{Ci}	mm	2.0	Primary $\leftrightarrow$ Secondary
Creepage distance	d_{Cp}	mm	2.0	Primary $\leftrightarrow$ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	200	

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T_a	°C	- 40		+ 90	
Ambient storage temperature	T_s	°C	- 40		+ 125	
Mass	m	g		2		

SPECIFICATIONS

$T_a = +25^\circ\text{C}$, $V_{DD} = +5\text{V}$, $R_L \geq 10\text{M}\Omega$


Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Measurement current range	LA01M021S05	I_f	A	- 21		21	
	LA01M032S05			- 31.8		31.8	
	LA01M035S05			- 35		35	
	LA01M041S05			- 41		41	
Maximum primary current (RMS)		$I_{p(RMS) \max}$	A			20	

SPECIFICATIONS



Ta=+25°C, V_{DD}=+5V, R_L≥10MΩ

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Supply Voltage		V _{DD}	V	4.5	5.0	5.5	
Number of primary turns		N _p	T	1			
Primary Jumper resistance		R _p	m Ω		0.34		
Current consumption (at I _p =0A)		I _{DD}	mA			10	
Offset voltage	LA01M021S05	V _{of}	V	2.390	2.500	2.610	
	LA01M032S05			2.408	2.500	2.592	
	LA01M035S05			2.423	2.500	2.577	
	LA01M041S05			2.432	2.500	2.568	
Temperature drift of offset voltage (at Ta= − 40 ~+ 90℃, Variation from V _{of} (Ta=35℃), I _p =0A)	LA01M021S05	TCV _o	mV		± 26.0		
	LA01M032S05				± 22.0		
	LA01M035S05				± 17.5		
	LA01M041S05				± 14.5		
Sensitivity	LA01M021S05	G	mV/A	98.0	100.0	102.0	
	LA01M032S05			64.7	66.0	67.3	
	LA01M035S05			58.8	60.0	61.2	
	LA01M041S05			49.0	50.0	51.0	
Temperature coefficient 1 of Sensitivity (at Ta= + 35 ~+ 90℃, Variation ratio to G (Ta=35℃))	LA01M021S05	TCG1	%		± 1.0		
	LA01M032S05				± 1.0		
	LA01M035S05				± 1.0		
	LA01M041S05				± 2.0		
Temperature coefficient 2 of Sensitivity (at Ta= − 40 ~+ 35℃, Variation ratio to G (Ta=35℃))		TCG2	%		± 2.0		
Output Linearity (at 0... I _f)		ε _L	%	− 1		1	
Output noise voltage		V _{NRMS}	mV _{rms}			2.1	
Ratiometric error of sensitivity		V _{G-R}	%	− 1		1	
Ratiometric error of offset voltage		V _{of-R}	%	− 1		1	
Response time 1 (at 90% of I _f)		t _r	μs		1		CL=100pF
Frequency bandwidth (− 3dB)		BW	kHz		400		CL=100pF

FUNCTIONAL BLOCK DIAGRAM

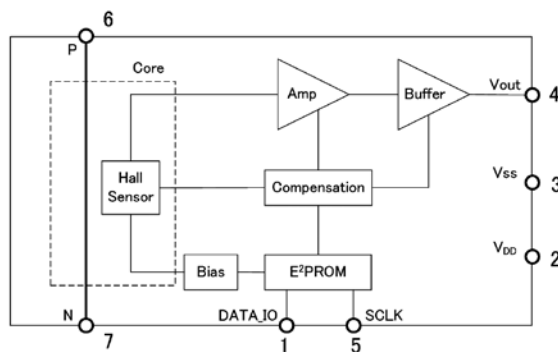


CHARACTERISTIC CURVE (TYP) AND PRIMARY CURRENT DERATING CURVE

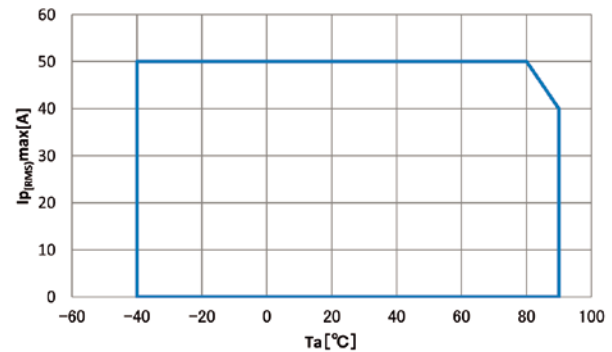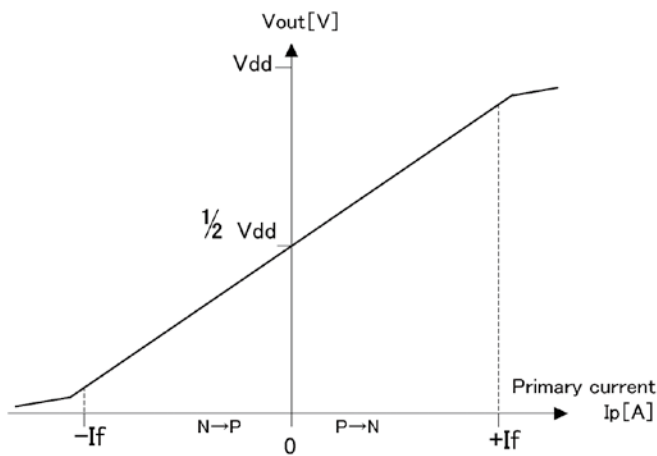

Conditions : Mounted on the test board complying with the EIA/JEDEC Standards (EIA/JESD51.)


CHARACTERISTICS DEFINITIONS

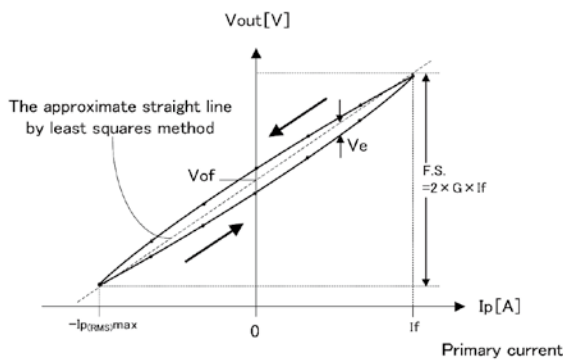

- Sensitivity G [mV/A], Offset voltage V_{of} [V]
Sensitivity (G) is defined as slope of the approximate straight line by least squares method, using the data of the output voltage (V_{out}) when sweeping the measured current I_p at rated current range.
Also Offset voltage (V_{of}) is defined as the intercept of the approximate straight line.
- Output linearity ε_L [%]
Output linearity (ε_L) is defined as the ratio of maximum error voltage (V_e) to the full scale (F.S.), where V_d is maximum difference between the Output voltage (V_{out}) and the approximate straight line calculated in the sensitivity and offset voltage definition;
$$\varepsilon_L = V_e / F.S. \times 100$$
- Ratiometric error of sensitivity V_{G-R} [%], ratiometric error of Offset voltage V_{of-R} [%]
Output of LA01M Series is ratiometric.
Sensitivity (G) and Offset voltage (V_{of}) are proportional to Supply voltage (V_{DD}).
- Ratiometric error is defined as follows in the supply voltage range ($4.5V < V_{DD1} < 5.5V$);
$$V_{G-R} = 100 \times [(G(V_{DD}=V_{DD1}) / G(V_{DD}=5V)) - (V_{DD1} / 5)] / (V_{DD1} / 5)$$

$$V_{of-R} = 100 \times [V_{of}(V_{DD}=V_{DD1}) - V_{of}(V_{DD}=5V) \times (V_{DD1} / 5)] / F.S.$$


TERMINAL DESCRIPTIONS



Terminal number

- | | |
|-------------------|---------------------------|
| ① DATA_IO | Test pin (connect to GND) |
| ② V _{DD} | Power supply (5V) |
| ③ V _{SS} | GND (0V) |
| ④ Vout | Analog output |
| ⑤ SCLK | Test pin (connect to GND) |
| ⑥ P | Input |
| ⑦ N | Output |


DIMENSIONS (mm)

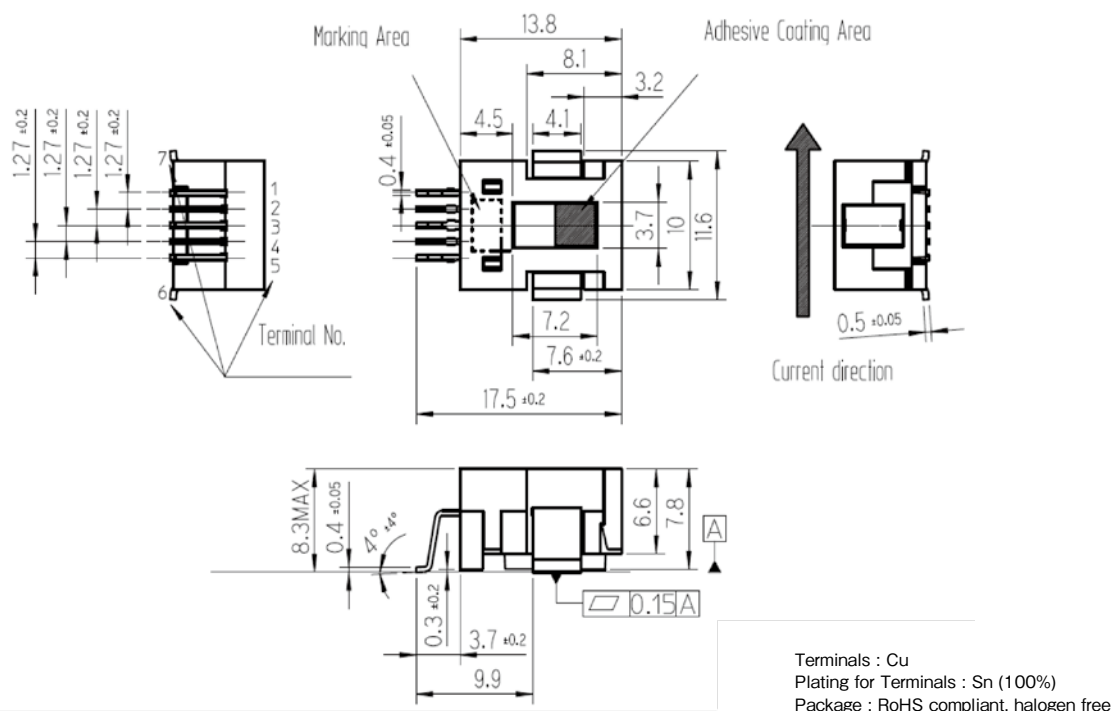

Note1) The tolerances of dimensions without any mention are ± 0.1 mm.


Note2) The adhesive material (RoHS compliant, halogen free) is used for holding the magnetic core.

RECOMMENDED THROUGH-HOLE LAYOUTS (mm)

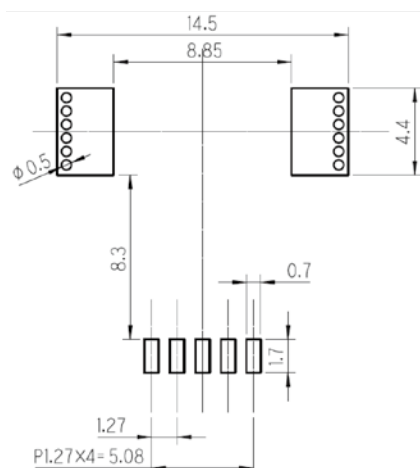

Note) If 2 or more trace layers are used as the current path, please make enough number of through-holes to flow current between the trace layers.

TYPICAL APPLICATION

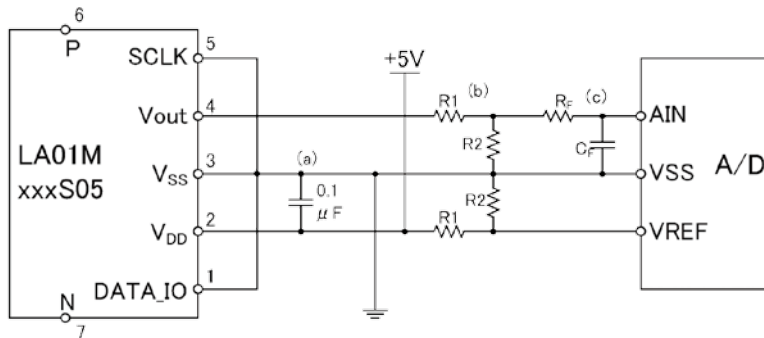

- (a) Please be placed the bypass capacitor $0.1 \mu F$ as close as possible to the VDD and VSS pins of LA01M Series.
- (b) LA01M Series have a ratiometric output. When received output by the A / D converter , it is possible to reduce the A / D conversion error due to supply voltage fluctuations by setting a common voltage level of the A / D converter and supply voltage. The resistive divider with R1 and R2 is required, if the reference voltage of the A / D converter is lower than + 5V.
- (c) If necessary, please insert a low-pass filter to Vout.

TYPE DESIGNATION


LA01 M * * * S 05

① ② ③ ④ ⑤

- ① Model (4 figures)
LA01 : Series
- ② Mounting configuration (1 figure)
M : Surface mount type
- ③ Measurement current range (3 figures)
Ex) 035 : 35A 100 : 100A
- ④ Control power supply type (1 figure)
S : Single supply
- ⑤ Power supply voltage (2 digits)

Magnetic Proportion System / Compact size and High-speed response. $V_{CC} = +3.3V$

LA02P Series



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V_{DD}	V	6.5	
Jumper temperature	—	°C	120	
Output current	I_{out}	mA	± 1	Recommend ; $< \pm 0.5mA$
ESD rating (HBM: Human Body Model)	—	kV	2	$C=100pF$, $R=1.5k\Omega$

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V_d	V	$\geq AC3000V$, 50/60Hz, for 1minute (Sensing current 0.5mA)	Primary $\leftrightarrow$ Secondary
Impulse withstand voltage	V_w	kV	6	Primary $\leftrightarrow$ Secondary Input waveform : • Front time 1.2 μs • Time to half value 50 μs • single
Clearance distance	d_{Ci}	mm	13.3	Primary $\leftrightarrow$ Secondary
Creepage distance	d_{Cp}	mm	13.3	Primary $\leftrightarrow$ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	150	

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T_a	°C	- 40		+ 110	
Ambient storage temperature	T_s	°C	- 40		+ 150	
Mass	m	g		5.5		
Internal magnetic core	—	—	Ferrite			

SPECIFICATIONS

$T_a = +25^\circ C$, $V_{DD} = +3.3V$, $R_L \geq 10M\Omega$

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Measurement current range	LA02P021S03	I_f	A	- 21		21	
	LA02P035S03			- 35		35	
	LA02P054S03			- 54		54	
	LA02P085S03			- 85		85	

SPECIFICATIONS

Ta=+25°C, V_{DD}=+3.3V, R_L≥10MΩ

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Maximum primary current (RMS)		I _{p (RMS)} max	A			50	* 1
Supply Voltage		V _{DD}	V	2.97	3.3	3.63	
Number of primary turns		N _p	T	1			
Primary Jumper resistance		R _p	mΩ		0.1		
Current consumption (at If)		I _{DD}	mA			10	
Offset voltage (at If=0A)	—	V _{of}	V	1.636	1.650	1.664	At factory shipment
	LA02P021S03			(1.565)	1.650	(1.735)	Reference value after the flow soldering and over the lifetime of this product.
	LA02P035S03			(1.593)	1.650	(1.707)	
	LA02P054S03			(1.608)	1.650	(1.692)	
	LA02P085S03			(1.618)	1.650	(1.682)	
Temperature drift of offset voltage (at Ta= − 40 ~+ 110℃, Variation from V _{of} (Ta=35℃), I _p =0A)	LA02P021S03	TCV _{of}	mV		± 9.0		
	LA02P035S03				± 5.5		
	LA02P054S03				± 3.5		
	LA02P085S03				± 2.5		
Sensitivity	LA02P021S03	G	mV/A	61.1	62.5	63.9	
	LA02P035S03			36.7	37.5	38.3	
	LA02P054S03			23.9	24.5	25.1	
	LA02P085S03			15.1	15.5	15.9	
Temperature coefficient 1 of Sensitivity (at Ta= − 40 ~+ 110℃, Variation ratio to G (Ta=35℃))		TCG1	%		± 0.4		
Output Linearity (at 0... If)		ε _L	%F.S.	− 1		1	
Output noise voltage		V _{NRMS}	mVrms		1.7		
Ratiometric error of sensitivity		V _{G-R}	%	− 1		1	
Ratiometric error of offset voltage	LA02P021S03	V _{of-R}	%F.S.	− 0.8		0.8	
	LA02P035S03			− 0.6		0.6	
	LA02P054S03			− 0.6		0.6	
	LA02P085S03			− 0.6		0.6	
Response time 1 (at 90% of If)		tr	μs		1		CL=100pF
Frequency bandwidth (− 3dB)		BW	kHz		300		CL=100pF


* 1 When I_{p(RMS)}max is bigger than the value of I_f, I_{p(RMS)}max restricts it to the value of I_f.

STANDARDS



IEC60950 , UL508 , CSA C22.2 No. 14

※ Please refer to the another sheet about conditions of UL Recognition.


FUNCTIONAL BLOCK DIAGRAM

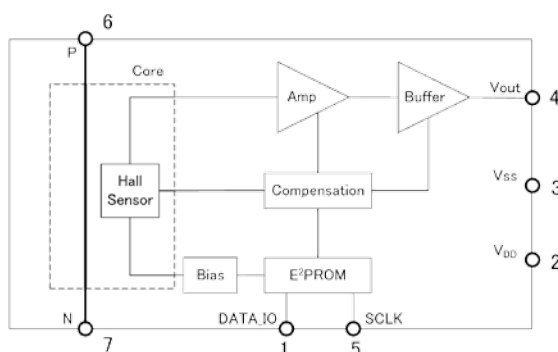

CHARACTERISTIC CURVE (TYP) AND PRIMARY CURRENT DERATING CURVE

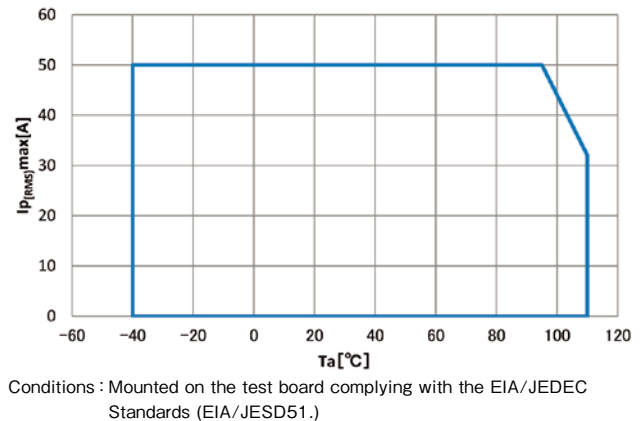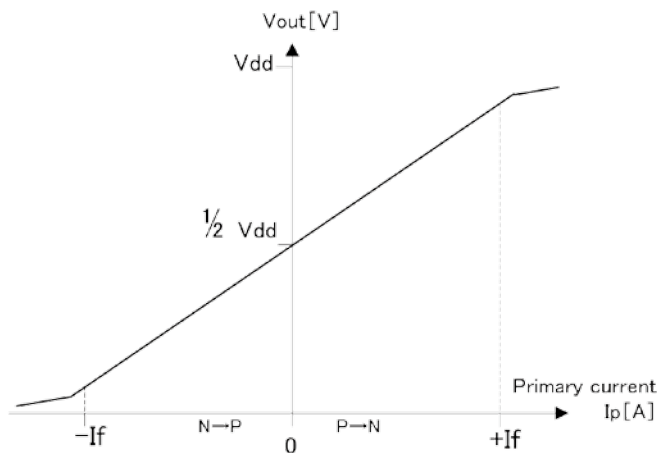

CHARACTERISTICS DEFINITIONS

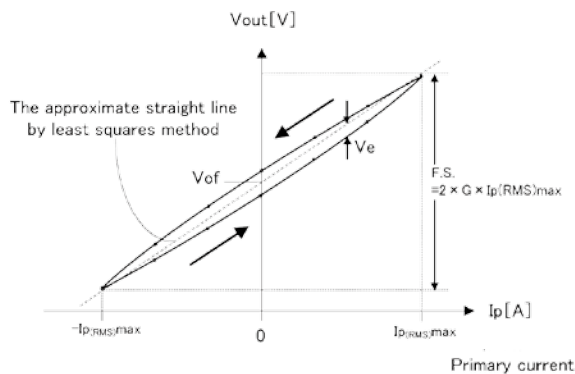


- When $I_{p(RMS)max}$ is bigger than the value of I_f , $I_{p(RMS)max}$ restricts it to the value of I_f .

- Sensitivity G [mV/A], Offset voltage V_{of} [V]
Sensitivity (G) is defined as slope of the approximate straight line by least squares method, using the data of the output voltage (V_{out}) when sweeping the measured current I_p at rated current range.
Also Offset voltage (V_{of}) is defined as the intercept of the approximate straight line.
- Output linearity ϵ_L [%]
Output linearity (ϵ_L) is defined as the ratio of maximum error voltage (V_e) to the full scale (F.S.), where V_d is maximum difference between the Output voltage (V_{out}) and the approximate straight line calculated in the sensitivity and offset voltage definition;
$$\epsilon_L = V_e / F.S. \times 100$$
- Ratiometric error of sensitivity V_{G-R} [%], ratiometric error of Offset voltage V_{of-R} [%]
Output of LA02P Series is ratiometric.
Sensitivity (G) and Offset voltage (V_{of}) are proportional to Supply voltage (V_{DD}).
- Ratiometric error is defined as follows in the supply voltage range ($2.97V < V_{DD1} < 3.63V$);
$$V_{G-R} = 100 \times [(G(V_{DD}=V_{DD1}) / G(V_{DD}=3.3V)) - (V_{DD1} / 3.3)] / (V_{DD1} / 3.3)$$

$$V_{of-R} = 100 \times [V_{of}(V_{DD}=V_{DD1}) - V_{of}(V_{DD}=3.3V) \times (V_{DD1} / 3.3)] / F.S.$$


TERMINAL DESCRIPTIONS



Terminal number


- | | |
|-------------------|---------------------------|
| ① DATA_IO | Test pin (connect to GND) |
| ② V _{DD} | Power supply (3.3V) |
| ③ V _{SS} | GND (0V) |
| ④ Vout | Analog output |
| ⑤ SCLK | Test pin (connect to GND) |
| ⑥ P | Input |
| ⑦ N | Output |

DIMENSIONS (mm)

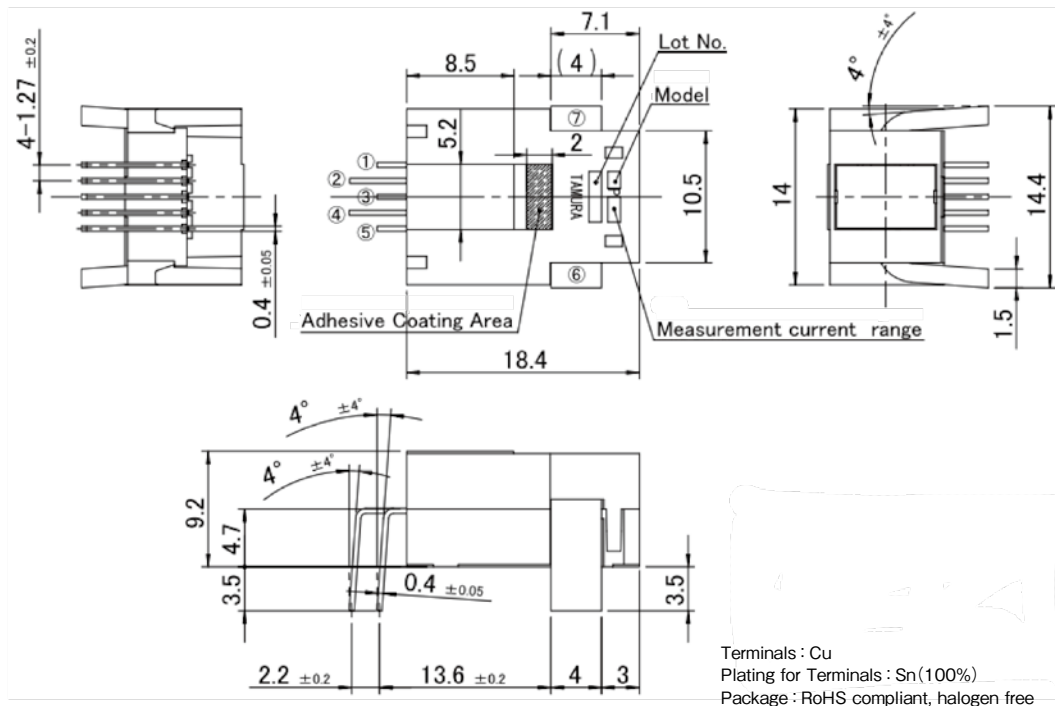


Note1) The tolerances of dimensions without any mention are ± 0.1 mm.

RECOMMENDED THROUGH-HOLE LAYOUTS (mm)

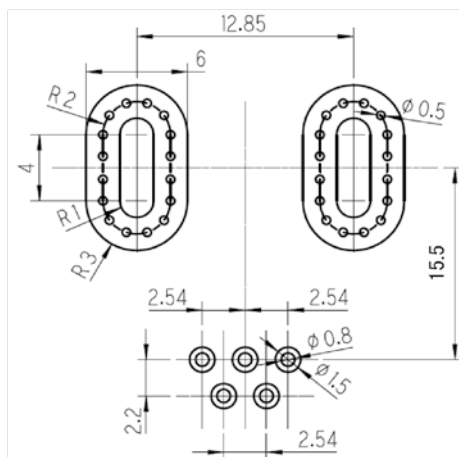

Note) If 2 or more trace layers are used as the current path, please make enough number of through-holes to flow current between the trace layers.

TYPICAL APPLICATION

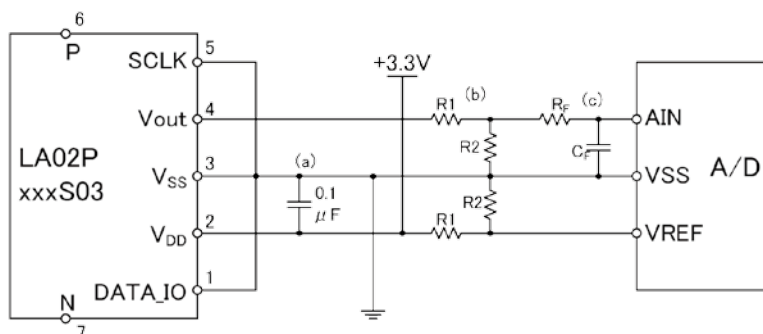

- (a) Please be placed the bypass capacitor 0.1 μ F as close as possible to the VDD and VSS pins of LA02P Series.
- (b) LA02P Series have a ratiometric output. When received output by the A / D converter, it is possible to reduce the A / D conversion error due to supply voltage fluctuations by setting a common voltage level of the A / D converter and supply voltage. The resistive divider with R1 and R2 is required, if the reference voltage of the A / D converter is lower than + 3.3V.
- (c) If necessary, please insert a low-pass filter to Vout.

TYPE DESIGNATION

LA02 P * * * S 03

① ② ③ ④ ⑤

- ① Model (4 figures)
LA02 : Series
- ② Mounting configuration (1 figure)
P : PCB Mounting type
- ③ Measurement current range (3 figures)
Ex) 035 : 35A 085 : 85A
- ④ Control power supply type (1 figure)
S : Single supply
- ⑤ Power supply voltage (2 digits)

RELIABILITY TEST

No.	Item	Test Conditions	n	Test Time
1	High Temp. High Humidity Bias Test	【JEITA EIAJ ED-4701 102】 Ta=85°C, 85%RH, continuous operation	22	1000h
2	High Temperature Bias Test	【JEITA EIAJ ED-4701 101】 Ta=125°C, continuous operation	22	1000h
3	High Temperature Storage Test	【JEITA EIAJ ED-4701 201】 Ta=150°C	22	1000h
4	Low Temperature Storage Test	【JEITA EIAJ ED-4701 202】 Ta=-55°C	22	1000h
5	Heat Cycle Test	【JEITA EIAJ ED-4701 105】 -65°C(30min) ⇄ 150°C(30min) Tested in vapor phase	22	500 cycles
6	Vibration Test	【JEITA EIAJ ED-4701 403】 Vibration frequency: 10~55Hz(1 min.) Vibration amplitude: 1.5mm(x,y,z directions)	5	2h for each direction

Tested samples are pretreated as below before each reliability test:

Desiccation : 125°C /24h → Moisture Absorption : 85°C /85%RH/168h → Flow : 1 time (260°C , 10s)

Criterion for determining

Products whose drifts before and after the reliability tests do not exceed the values below are considered to be in spec.


Sensitivity G (Ta=25°C) : Within $\pm 1.5\%$ (All model)

Offset Voltage Vof (Ta=25°C) : Within $\pm 100\text{mV}$ (LA02P021S03), Within $\pm 66\text{mV}$ (Other model)

Output Linearity ε_L (Ta=25°C) : Within $\pm 1\%$ (All model)

Magnetic Proportion System / Compact size and High-speed response. $V_{CC} = +5.0V$

LA03P Series



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V_{DD}	V	6.5	
Jumper temperature	—	°C	120	
Output current	I_{out}	mA	± 1	Recommend ; $< \pm 0.5mA$
ESD rating (HBM: Human Body Model)	—	kV	2	$C=100pF$, $R=1.5k\Omega$

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V_d	V	$\geq AC3000V$, 50/60Hz, for 1minute (Sensing current 0.5mA)	Primary $\leftrightarrow$ Secondary
Impulse withstand voltage	V_w	kV	6	Primary $\leftrightarrow$ Secondary Input waveform : • Front time 1.2 μs • Time to half value 50 μs • single
Clearance distance	d_{Ci}	mm	13.3	Primary $\leftrightarrow$ Secondary
Creepage distance	d_{Cp}	mm	13.3	Primary $\leftrightarrow$ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index : (CTI)	CTI	V	150	

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T_a	°C	- 40		+ 110	
Ambient storage temperature	T_s	°C	- 40		+ 150	
Mass	m	g		5.5		
Internal magnetic core	—	—	Ferrite			

SPECIFICATIONS

$T_a = +25^\circ C$, $V_{DD} = +5V$, $R_L \geq 10M\Omega$

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Measurement current range	LA03P021S05	I_f	A	- 21		21	
	LA03P035S05			- 35		35	
	LA03P054S05			- 54		54	
	LA03P085S05			- 85		85	

SPECIFICATIONS

Ta=+25°C, V_{DD}=+5V, R_L≥10MΩ

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Maximum primary current (RMS)		$I_{p(RMS)}$ max	A			50	* 1
Supply Voltage		V_{DD}	V	4.5	5.0	5.5	
Number of primary turns		N_p	T	1			
Primary Jumper resistance		R_p	mΩ		0.1		
Current consumption (at If)		I_{DD}	mA			11	
Offset voltage (at If=0A)	—	V_{of}	V	2.480	2.500	2.520	At factory shipment
	LA03P021S05			(2.350)	2.500	(2.650)	Reference value after the flow soldering and over the lifetime of this product.
	LA03P035S05			(2.400)	2.500	(2.600)	
	LA03P054S05			(2.425)	2.500	(2.575)	
	LA03P085S05			(2.445)	2.500	(2.555)	
Temperature drift of offset voltage (at Ta= − 40 ~+ 110℃, Variation from Vof (Ta=35℃), Ip=0A)	LA03P021S05	TCVof	mV		± 23.0		
	LA03P035S05				± 12.0		
	LA03P054S05				± 8.0		
	LA03P085S05				± 6.0		
Sensitivity	LA03P021S05	G	mV/A	98.0	100.0	102.0	
	LA03P035S05			58.8	60.0	61.2	
	LA03P054S05			39.2	40.0	40.8	
	LA03P085S05			24.4	25.0	25.6	
Temperature coefficient 1 of Sensitivity (at Ta= − 40 ~+ 110℃, Variation ratio to G (Ta=35℃))		TCG1	%		± 0.5		
Output Linearity (at 0... If)		ε_L	%F.S.	− 1		1	
Output noise voltage		V_{NRMS}	mVrms		1.7		
Ratiometric error of sensitivity		V_{G-R}	%	− 1		1	
Ratiometric error of offset voltage	LA03P021S05	V_{of-R}	%F.S.	− 0.7		0.7	
	LA03P035S05			− 0.5		0.5	
	LA03P054S05			− 0.5		0.5	
	LA03P085S05			− 0.5		0.5	
Response time 1 (at 90% of If)		t_r	μs		1		CL=100pF
Frequency bandwidth (− 3dB)		BW	kHz		300		CL=100pF


* 1 When I_{p(RMS)}max is bigger than the value of I_f, I_{p(RMS)}max restricts it to the value of I_f.

STANDARDS



IEC60950 , UL508 , CSA C22.2 No. 14

※ Please refer to the another sheet about conditions of UL Recognition.


FUNCTIONAL BLOCK DIAGRAM

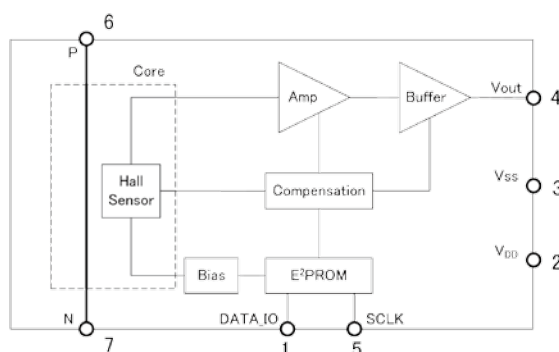

CHARACTERISTIC CURVE (TYP) AND PRIMARY CURRENT DERATING CURVE

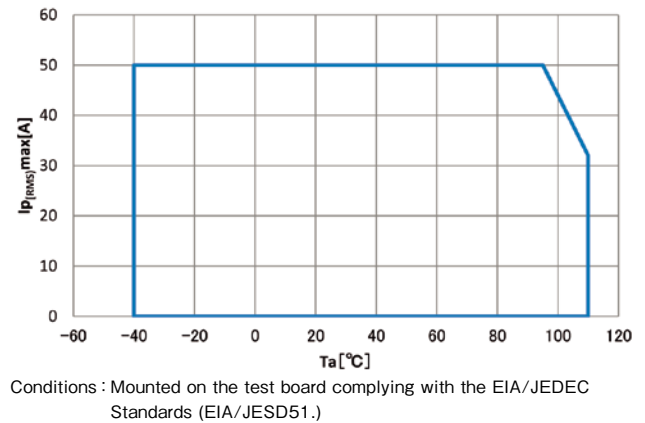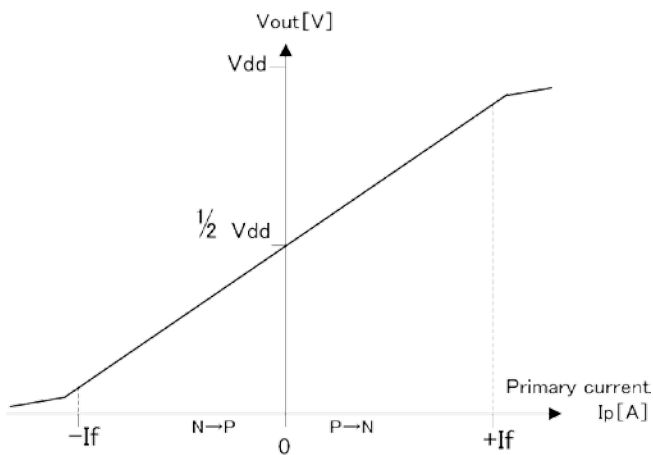


CHARACTERISTICS DEFINITIONS

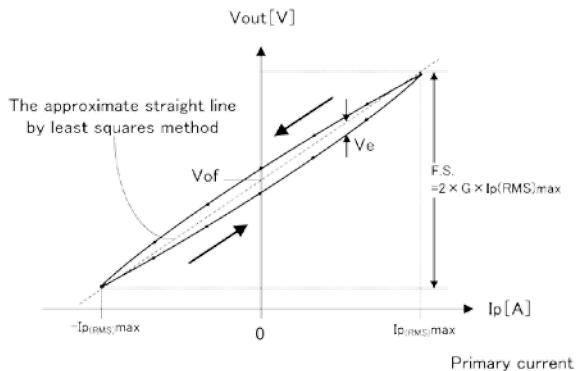

- When $I_{p(RMS)max}$ is bigger than the value of I_f , $I_{p(RMS)max}$ restricts it to the value of I_f .

- Sensitivity G [mV/A], Offset voltage V_{of} [V]
Sensitivity (G) is defined as slope of the approximate straight line by least squares method, using the data of the output voltage (V_{out}) when sweeping the measured current I_p at rated current range.
Also Offset voltage (V_{of}) is defined as the intercept of the approximate straight line.
- Output linearity ϵ_L [%]
Output linearity (ϵ_L) is defined as the ratio of maximum error voltage (V_e) to the full scale (F.S.), where V_d is maximum difference between the Output voltage (V_{out}) and the approximate straight line calculated in the sensitivity and offset voltage definition;
 $\epsilon_L = V_e / F.S. \times 100$
- Ratiometric error of sensitivity V_{G-R} [%], ratiometric error of Offset voltage V_{of-R} [%]
Output of LA03P Series is ratiometric.
Sensitivity (G) and Offset voltage (V_{of}) are proportional to Supply voltage (V_{DD}).
- Ratiometric error is defined as follows in the supply voltage range ($4.5V < V_{DD1} < 5.5V$);
 $V_{G-R} = 100 \times [(G(V_{DD}=V_{DD1}) / G(V_{DD}=5V)) - (V_{DD1} / 5)] / (V_{DD1} / 5)$
 $V_{of-R} = 100 \times [V_{of}(V_{DD}=V_{DD1}) - V_{of}(V_{DD}=5V) \times (V_{DD1} / 5)] / F.S.$


TERMINAL DESCRIPTIONS



Terminal number


- | | | |
|---|-----------------|---------------------------|
| ① | DATA_IO | Test pin (connect to GND) |
| ② | V _{DD} | Power supply (5V) |
| ③ | V _{SS} | GND (0V) |
| ④ | Vout | Analog output |
| ⑤ | SCLK | Test pin (connect to GND) |
| ⑥ | P | Input |
| ⑦ | N | Output |

DIMENSIONS (mm)

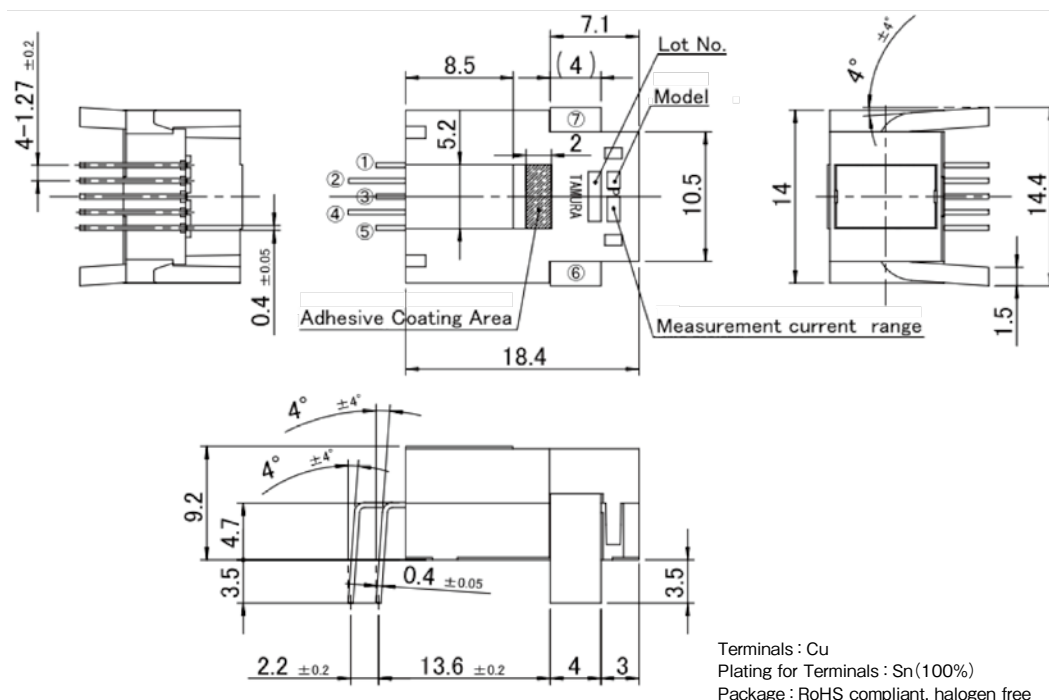


Note1) The tolerances of dimensions without any mention are ± 0.1 mm.

RECOMMENDED THROUGH-HOLE LAYOUTS (mm)

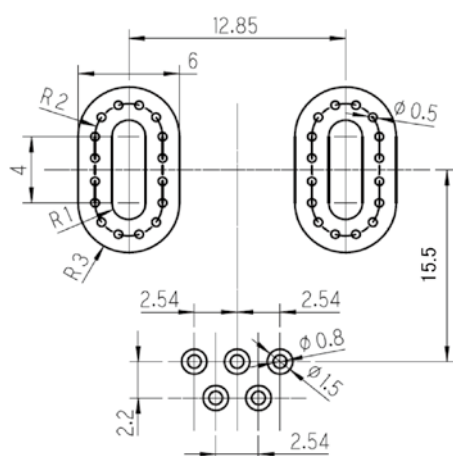

Note) If 2 or more trace layers are used as the current path, please make enough number of through-holes to flow current between the trace layers.

TYPICAL APPLICATION

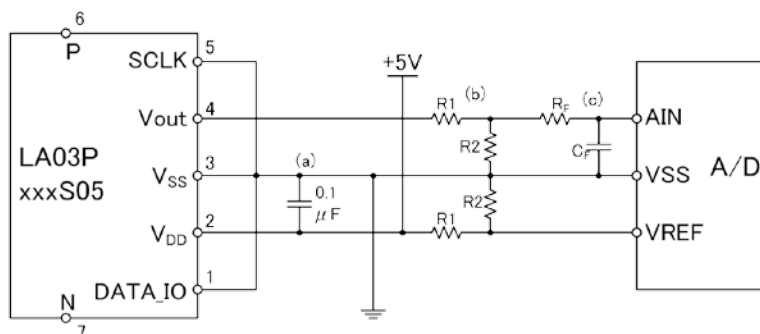

- (a) Please be placed the bypass capacitor 0.1 μ F as close as possible to the VDD and VSS pins of LA03P Series.
- (b) LA03P Series have a ratiometric output. When received output by the A / D converter, it is possible to reduce the A / D conversion error due to supply voltage fluctuations by setting a common voltage level of the A / D converter and supply voltage. The resistive divider with R1 and R2 is required, if the reference voltage of the A / D converter is lower than + 5V.
- (c) If necessary, please insert a low-pass filter to Vout.

TYPE DESIGNATION

LA03 P * * * S 05

① ② ③ ④ ⑤

- ① Model (4 figures)
LA03 : Series
- ② Mounting configuration (1 figure)
P : PCB Mounting type
- ③ Measurement current range (3 figures)
Ex) 035 : 35A 085 : 85A
- ④ Control power supply type (1 figure)
S : Single supply
- ⑤ Power supply voltage (2 digits)

RELIABILITY TEST

No.	Item	Test Conditions	n	Test Time
1	High Temp. High Humidity Bias Test	【JEITA EIAJ ED-4701 102】 Ta=85°C, 85%RH, continuous operation	22	1000h
2	High Temperature Bias Test	【JEITA EIAJ ED-4701 101】 Ta=125°C, continuous operation	22	1000h
3	High Temperature Storage Test	【JEITA EIAJ ED-4701 201】 Ta=150°C	22	1000h
4	Low Temperature Storage Test	【JEITA EIAJ ED-4701 202】 Ta=-55°C	22	1000h
5	Heat Cycle Test	【JEITA EIAJ ED-4701 105】 -65°C(30min) $\leftrightarrow$ 150°C(30min) Tested in vapor phase	22	500 cycles
6	Vibration Test	【JEITA EIAJ ED-4701 403】 Vibration frequency: 10~55Hz(1 min.) Vibration amplitude: 1.5mm(x,y,z directions)	5	2h for each direction

Tested samples are pretreated as below before each reliability test:

Desiccation : 125°C /24h $\rightarrow$ Moisture Absorption : 85°C /85%RH/168h $\rightarrow$ Flow : 1 time (260°C , 10s)

Criterion for determining

Products whose drifts before and after the reliability tests do not exceed the values below are considered to be in spec.

Sensitivity G (Ta=25°C) : Within $\pm$ 1.5% (All model)

Offset Voltage Vof (Ta=25°C) : Within $\pm$ 150mV (LA03P021S05), Within $\pm$ 100mV (Other model)

Output Linearity ϵ_L (Ta=25°C) : Within $\pm$ 1% (All model)

Servo system / Voltage-output type External magnetic field improvement type

S22P M2 SERIES



RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5V

Types		S22P006S05M2	S22P015S05M2	S22P025S05M2
Spec				
Primary nominal current	If	6A	15A	25A
Saturation current	If max	± 18A	± 45A	± 75A
Rated output voltage	Vo	Vof ± 0.625V (at If)		
Output voltage accuracy	XG	0.625V ± 0.010V (at If)		
Offset voltage *1	Vof	2.5V ± 0.050V (at If = 0A)	2.5V ± 0.020V (at If = 0A)	2.5V ± 0.015V (at If = 0A)
Output linearity	εL	± 0.2% (at If)		
Power supply voltage	Vcc	+ 5V ± 5%		
Consumption current	Icc	Typ. 12.5mA (If=0A) + 37.5mA (If max)		
di/dt Response time (@90% of If)	tr	≤ 1μs (at di / dt = If / μs)		
Thermal drift of gain	TcVo	≤ ± 0.05mV / °C (Without TcVof)		
Thermal drift of offset	TcVof	- 10 ~ 25°C : ± 1.6mV / °C 25 ~ 85°C : ± 0.8mV / °C	- 10 ~ 25°C : ± 0.6mV / °C 25 ~ 85°C : ± 0.3mV / °C	- 10 ~ 25°C : ± 0.4mV / °C 25 ~ 85°C : ± 0.2mV / °C
Hysteresis error	VOH	≤ 0.5mV (at If = 0A → If → 0A)		
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ↔ Secondary		
Insulation resistance	RIS	≥ 500MΩ (at DC500V) Primary ↔ Secondary		
Ambient Operating temperature	TA	- 10°C ~ + 85°C		
Ambient storage temperature	TS	- 25°C ~ + 100°C		

* 1 Offset voltage value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

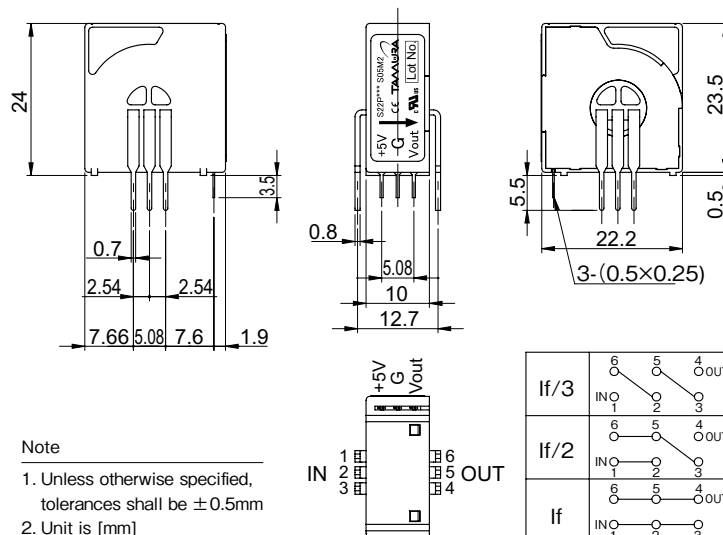

Servo system / Voltage-output type / Short lead model

S22P P SERIES



RoHS


SPECIFICATIONS

Ta=25°C, RL=10kΩ, Vcc=+5V

Spec	Types	S22P006S05P	S22P015S05P	S22P025S05P
Primary nominal current	If	6A	15A	25A
Saturation current	If max	± 18A	± 45A	± 75A
Rated output voltage	Vo	Vof ± 0.625V (at If)		
Output voltage accuracy	XG	0.625V ± 0.010V (at If)		
Offset voltage * 1	Vof	2.5V ± 0.050V (at If = 0 A)	2.5V ± 0.020V (at If = 0 A)	2.5V ± 0.015V (at If = 0 A)
Output linearity	εL	≤ ± 0.2% (at If)		
Power supply voltage	Vcc	+ 5V ± 5%		
Consumption current	Icc	Typ.12.5mA (If=0A) + 37.5mA (If max)		
di / dt Response time (@90% of If)	tr	≤ 1μs (di/dt = If / μs)		
Thermal drift of gain	TcVo	≤ ± 0.05mV / °C (Without TcVof)		
Thermal drift of offset	TcVof	- 10 ~ 25°C : ± 1.6mV / °C 25 ~ 85°C : ± 0.8mV / °C	- 10 ~ 25°C : ± 0.6mV / °C 25 ~ 85°C : ± 0.3mV / °C	- 10 ~ 25°C : ± 0.4mV / °C 25 ~ 85°C : ± 0.2mV / °C
Hysteresis error	Voh	≤ 0.5mV (at If = 0A → If → 0A)		
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) Primary ↔ Secondary		
Insulation resistance	Ris	≥ 500M Ω (at DC500V) Primary ↔ Secondary		
Ambient Operating temperature	TA	- 10°C ~ + 85°C		
Ambient storage temperature	TS	- 25°C ~ + 100°C		

* 1 Offset voltage value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

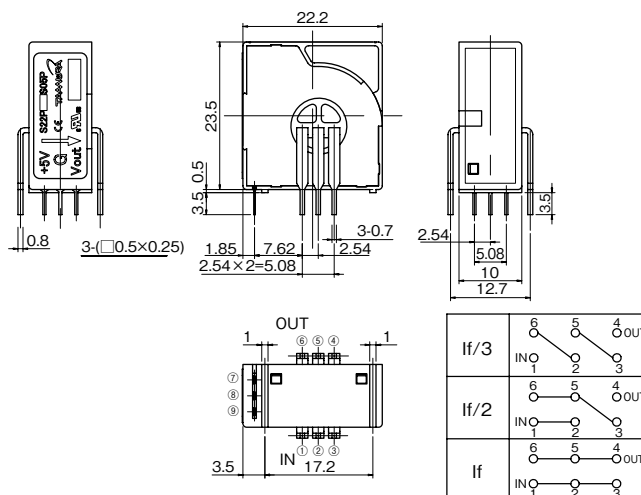

Terminal number

- ① IN-1
- ② IN-2
- ③ IN-3
- ④ OUT-3
- ⑤ OUT-2
- ⑥ OUT-1
- ⑦ Vout
- ⑧ GND
- ⑨ + Vcc (+ 5V)

Weight:


8g typ

Note

1. Unless otherwise specified, tolerances shall be ± 0.5mm
2. Unit is [mm]

Servo system Current-output type

S23P M2



RoHS


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Spec		Types	S23P50/100D15M2			
Primary nominal current	If	50A		100A		
Measuring resistance (If= ± ADC, Ta=85℃)	RL	Vcc= ± 12V	0 Ω~ 217 Ω	Vcc= ± 12V	0 Ω~ 57 Ω	
		Vcc= ± 15V	0 Ω~ 327 Ω	Vcc= ± 15V	45 Ω~ 114 Ω	
Output current	Io	25mA (Turn ratio 1 : 2000)		50mA (Turn ratio 1 : 2000)		
Output current accuracy	XG	Io ± 0.25% (without Iof)				
Offset current	Iof	≤ ± 0.15mA (at If=0A) *1				
Maximum current Vcc= ± 15V (Operating time: ≤ 10sec)	If max	± 110A (at RL ≤ 71 Ω)		± 160A (at RL ≤ 25 Ω)		
Output linearity	ε L	≤ ± 0.15% (at If)				
Power supply voltage	Vcc	± 12V ± 5% ~± 15V ± 5% (Rated output current is restricted by Vcc)				
Consumption current	Icc	≤ ± 16mA (without Io)				
di/dt Response time (@90% of If)	tr	≤ 0.5μs (at di/dt = 100A/μss)				
Thermal drift of gain	Tclo	≤ ± 0.01%/℃ (Without Tclof)				
Thermal drift of offset	Tclof	≤ ± 0.5mA (− 25℃~+ 85℃)				
Hysteresis error	IoH	≤ 0.3mA (at If=0A → If → If=0A)				
Insulation voltage	Vd	AC5000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary				
Insulation resistance	RIS	≥ 500M Ω (at DC500V) Primary ⇔ Secondary				
Ambient Operating temperature	TA	− 40℃~+ 85℃				
Ambient storage temperature	TS	− 40℃~+ 90℃				
Secondary coil resistance	Rs	at Ta=70℃ 115 Ω at Ta=85℃ 121 Ω				

* 1 Offset current value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

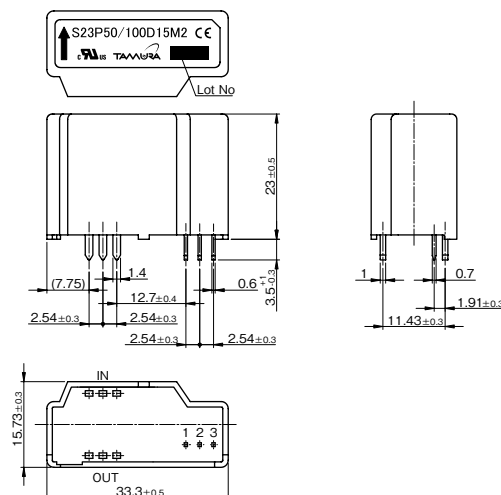

Terminal number

1 - Vcc
2 + Vcc
3 OUT

Weight:


26g typ

Note

1. Unless otherwise specified,
tolerances shall be ±0.5mm
2. Unit is [mm]

Servo system Current-output type

S23P M1



RoHS


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Types		S23P50/100D15M1			
Spec					
Primary nominal current	If	50A		100A	
Measuring resistance If= ± ADC at Ta=85℃	RL	Vcc= ± 12V	20 Ω～ 145 Ω	Vcc= ± 12V	20 Ω～ 57 Ω
		Vcc= ± 15V	48 Ω～ 205 Ω	Vcc= ± 15V	48 Ω～ 85 Ω
Rated output current	Io	50mA (Turn ratio 1 : 1000)		100mA (Turn ratio 1 : 1000)	
Output current accuracy	XG	Io ± 0.25% (without Iof)			
Offset current	Iof	≦± 0.3mA (at If=0A) *1			
Maximum current Vcc= ± 12V (Operating time: ≦ 3sec)	If max	± 226A (at RL=7.5 Ω)			
Output linearity	ε L	≦ ± 0.15% (at If)			
Power supply voltage	Vcc	± 12V ± 5% ～± 15V ± 5% (Rated output current is restricted by Vcc)			
Consumption current	Icc	≦ ± 16mA (without Io)			
di/dt Response time (@90% of If)	tr	≦ 0.5μs (at di / dt = 100A/μs)			
Thermal drift of gain	Tclo	≦± 0.01%/℃ (Without Tclof)			
Thermal drift of offset	Tclof	± 0.5mA type, ≦± 0.8mA max (－ 25℃～+ 85℃)			
Hysteresis error	Ioh	≦ 0.3mA (at If=0A → If → 0A)			
Insulation voltage	Vd	AC5000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary			
Insulation resistance	RI _S	≧ 500M Ω (at DC500V) Primary ⇔ Secondary			
Ambient Operating temperature	T _A	－ 40℃～+ 85℃			
Ambient storage temperature	T _S	－ 40℃～+ 90℃			
Secondary coil resistance	Rs	at Ta=70℃ 33 Ω at Ta=85℃ 35 Ω			

* 1 Offset current value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

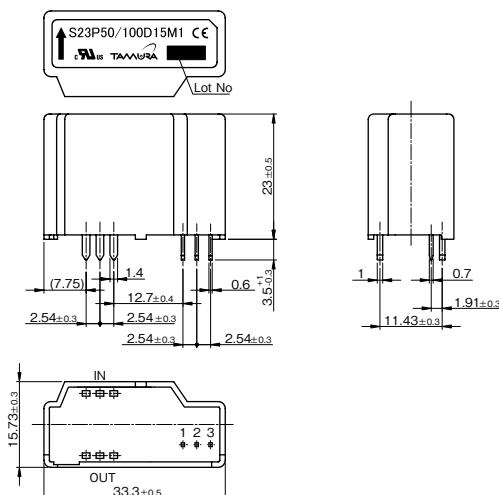

Terminal number

- 1 − Vcc
- 2 + Vcc
- 3 OUT

Weight:


26g typ

Note

- 1. Unless otherwise specified, tolerances shall be ±0.5mm
- 2. Unit is [mm]

Servo system Current-output type

S23P



RoHS

TAMURA recommends S23P50/100D15M2 as a succession model.


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Spec		Types	S23P50/100D15			
Primary nominal current	If	50A			100A	
Measuring resistance If= ± ADC at Ta=85℃	RL	Vcc= ± 12V	0 Ω～ 217 Ω		Vcc= ± 12V	0 Ω～ 57 Ω
		Vcc= ± 15V	0 Ω～ 327 Ω		Vcc= ± 15V	45 Ω～ 114 Ω
Rated output current	Io	25mA (Turn ratio 1 : 2000)			50mA (Turn ratio 1 : 2000)	
Output current accuracy	XG	Io ± 0.25% (without Iof)				
Offset current	Iof	≦± 0.15mA (at If=0A) *1				
Maximum current Vcc= ± 15V (Operating time: ≦ 10sec)	If max	± 110A (at RL ≦ 71 Ω)			± 160A (at RL ≦ 25 Ω)	
Output linearity	ε L	≦ ± 0.15% (at If)				
Power supply voltage	Vcc	± 12V ± 5% ～± 15V ± 5% (Rated output current is restricted by Vcc)				
Consumption current	Icc	≦ ± 16mA (without Io)				
di/dt Response time (@90% of If)	tr	≦ 0.5μs (di / dt = 100A/μs)				
Thermal drift of gain	Tclo	≦± 0.01%/℃ (Without Tclof)				
Thermal drift of offset	Tclof	≦± 0.5mA max (－ 25℃～+ 85℃)				
Hysteresis error	Ioh	≦ 0.3mA (at If=0A → If → 0A)				
Insulation voltage	Vd	AC5000V for 1 minute (Sensing current 0.5mA) Primary ⇔ Secondary				
Insulation resistance	RI _S	≧ 500M Ω (at DC500V) Primary ⇔ Secondary				
Ambient Operating temperature	T _A	－ 40℃～+ 85℃				
Ambient storage temperature	T _S	－ 40℃～+ 90℃				
Secondary coil resistance	Rs	at Ta=70℃ 115 Ω at Ta=85℃ 121 Ω				

* 1 Offset current value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

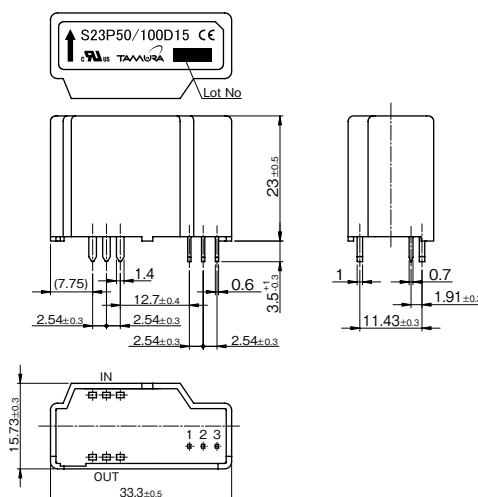

Terminal number

- 1 - Vcc
- 2 + Vcc
- 3 OUT

Weight:

26g typ

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm
- 2. Unit is [mm]

Servo system Current-output type

S25P SERIES



RoHS

SPECIFICATIONS


Ta=25°C, Vcc=±15V

Spec	Types	S25P050D15X	S25P100D15Y	S25P100D15X	S25P150D15Y
Primary nominal current	If	50A	100A	100A	150A
Measuring resistance If= ± ADC at Ta=85°C	RL	Vcc= ± 12V 60 Ω~ 95 Ω Vcc= ± 15V 135 Ω~ 155 Ω	Vcc= ± 12V 0 Ω~ 42 Ω Vcc= ± 15V 20 Ω~ 102 Ω	Vcc= ± 12V 10 Ω~ 65 Ω Vcc= ± 15V 40 Ω~ 95 Ω	Vcc= ± 12V 0 Ω~ 15 Ω Vcc= ± 15V 0 Ω~ 55 Ω
Rated output current	Io	50mA (Turn ratio 1 : 1000)	50mA (Turn ratio 1 : 2000)	100mA (Turn ratio 1 : 1000)	75mA (Turn ratio 1 : 2000)
Output current accuracy	XG	Io ± 0.5% (without Io)			
Offset current *1	Iof	≤ ± 0.2mA (at If=0A)	≤ ± 0.1mA (at If=0A)	≤ ± 0.2mA (at If=0A)	≤ ± 0.2mA (at If=0A)
Maximum current Vcc= ± 15V, Ta=85°C	If max	± 55A (at RL=135 Ω) *2	± 150A (at 20 Ω ≤ RL ≤ 25 Ω)	± 160A (at 40 Ω ≤ RL ≤ 50 Ω)	± 200A (at 0 Ω ≤ RL ≤ 40 Ω)
Output linearity	εL	≤ ± 0.15% (at If)			
Power supply voltage	Vcc	± 12V ± 5% ~ ± 15V ± 5% (Rated output current is restricted by Vcc)			
Consumption current	Icc	≤ ± 16mA (Without Io)			
di/dt Response time (@90% of If)	tr	≤ 1μs (at di/dt=If/μs)			
Thermal drift of gain	TCIo	≤ ± 0.01%/°C (Without TClof)			
Thermal drift of offset	TClof	≤ ± 0.5mA			
Hysteresis error	IoH	≤ 0.3mA (at If=0A → If → If=0A)			
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal			
Insulation resistance	RI5	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal			
Ambient Operating temperature	TA	- 40°C ~ + 85°C			
Ambient storage temperature	TS	- 40°C ~ + 90°C			
Secondary coil resistance	Rs	at Ta=70°C 80 Ω at Ta=85°C 85 Ω	at Ta=70°C 120 Ω at Ta=85°C 128 Ω	at Ta=70°C 25 Ω at Ta=85°C 28 Ω	at Ta=70°C 95 Ω at Ta=85°C 105 Ω

* 1 Offset current value is after removal of core hysteresis. * 2 Ta=70°C, If max=70A (at 50 Ω ≤ RL ≤ 90 Ω)

* Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

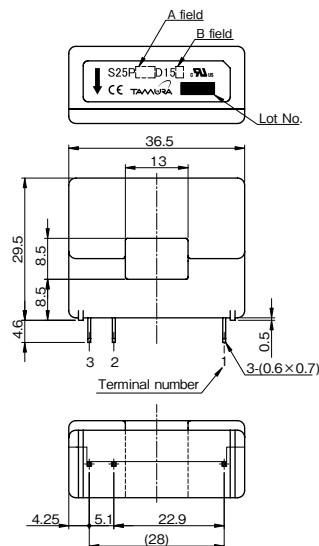

A field display

Current	A field
50A	050
100A	100
150A	150

B field display

Coil	B field
1000T	X
2000T	Y

* 50A is 1000T only, 150A is 2000T only

Terminal number

- 1 + Vcc
- 2 - Vcc
- 3 OUT

Weight:

20g typ

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5mm

Servo system / Current-output type

S21S SERIES



RoHS


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Spec	Types	S21S180D15JN
Primary nominal current	If	180A
Measuring Resistance (at 80°C)	R _L	0 ~ 68 Ω (at Vcc= ± 12V) 0 ~ 100 Ω (at Vcc= ± 15V)
Rated output Current	I _o	45mA (Turn Ratio: 1:4000)
Output Current Accuracy	X _G	I _o ± 1% (at I _f without I _{of})
Offset Current	I _{of}	≤ ± 0.2mA (at I _f =0A) *1
Maximum Current	I _f max	± 540A (TA=25°C, at 5 ≤ R _M ≤ 30 Ω; at TA=80°C, 5 ≤ R _M ≤ 20 Ω)
Output Linearity	ε _L	≤ ± 0.3% (at I _f)
Power supply voltage	Vcc	± 12V ± 5% ~ ± 15V ± 5% (Rated output current is restricted by Vcc)
Consumption Current	I _{cc}	≤ ± 16mA (without I _o)
di/dt Response Time (@90% of I _f)	tr	≤ 1μs (at di/dt=100A/μs)
Thermal drift of gain	TC _{Lo}	≤ ± 0.02%/°C (without TC _{LoF})
Thermal drift of offset	TC _{LoF}	≤ ± 0.01mA/°C
Hysteresis error	I _{oH}	≤ 0.2mA (at I _f = 0A → I _f → 0A)
Insulation voltage	V _d	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal
Insulation resistance	R _{IS}	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal
Ambient Operating temperature	T _A	- 30°C ~ + 80°C
Ambient storage temperature	T _S	- 40°C ~ + 85°C
Secondary coil resistance	R _s	48 Ω (at T _A =25°C), 60 Ω (at T _A =80°C)

* 1 Offset current value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

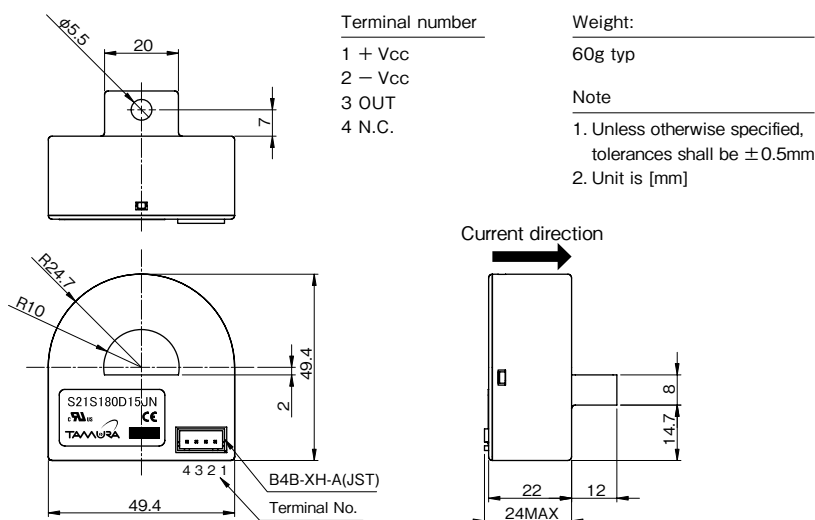

Servo system Current-output type

S20S M1 SERIES



RoHS


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Spec		Types	S20S200D15M1			
Primary nominal current	If	200AT		300AT		
Measuring resistance	RL	Vcc= ± 12V	5 Ω ~ 35 Ω	Vcc= ± 12V	9 Ω ~ 13 Ω	
		Vcc= ± 15V	25 Ω ~ 65 Ω	Vcc= ± 15V	29 Ω ~ 33 Ω	
Rated output current	Io	100mA (Turn Ratio: 1 : 2000)		150mA (Turn Ratio: 1 : 2000)		
Output current accuracy	XG	Io ± 1% (without Iof)				
Offset current * 1	Iof	≦ ± 0.5mA (at If=0A)				
Maximum current @ Vcc ± 15VDC&Ta=70℃	If max	± 300AT (at RL=30 Ω)				
Output linearity	ε L	≦ ± 0.25% (at If)				
Power supply voltage	Vcc	± 12V ± 5% ~ ± 15V ± 5% (Rated output current is restricted by Vcc)				
Consumption current	Icc	≦ ± 16mA (without Io)				
di/dt Response time	tr	≦ 1μs (di / dt = If/μs)				
Frequency characteristics @- 1dB	f	DC…150kHz				
Thermal drift of gain	Tclo	≦ ± 0.02%/℃ (Without Tc Iof) (- 5℃ ~ + 70℃)				
Thermal drift of offset	Tclof	≦ ± 0.012mA/℃ (- 5℃ ~ + 70℃)				
Hysteresis error	Ioh	≦ 0.3mA (at If = 0A → If → 0A)				
Insulation voltage	Vd	AC2500V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal				
Insulation resistance	RIS	≧ 500M Ω (at DC500V) inside of through hole ⇔ terminal				
Ambient Operating temperature	TA	- 20℃ ~ + 70℃				
Ambient storage temperature	TS	- 20℃ ~ + 85℃				
Secondary coil resistance	Rs	33 Ω @ Ta=70℃				

* 1 Offset current value is after removal of core hysteresis.

DIMENSIONS (mm)

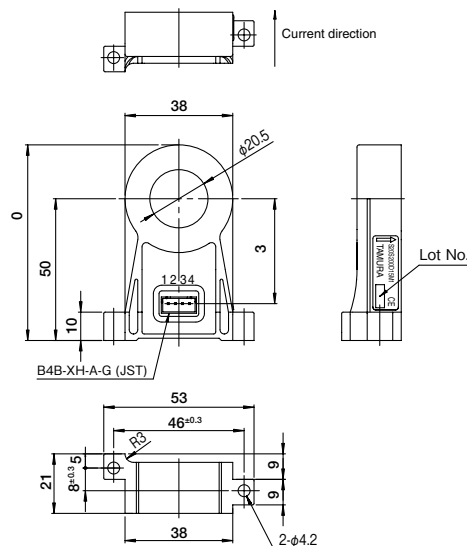

Servo system Current-output type

S26P SERIES



RoHS


SPECIFICATIONS

Ta=25°C, Vcc=±15V

Spec	Types	S26P200D15Y	
Primary nominal current	If	200A	300A
Measuring resistance @Ta=85°C	RL	Vcc= ± 12V 0 Ω ~ 26 Ω Vcc= ± 15V 0 Ω ~ 56 Ω	Vcc= ± 12V 0 Ω ~ 4 Ω * 1 Vcc= ± 15V 0 Ω ~ 8 Ω
Rated output current	Io	100mA (Turn Ratio: 1 : 2000)	150mA (Turn Ratio: 1 : 2000)
Output current accuracy	XG	Io ± 0.4% (Without Iof)	
Offset current	Iof	≤ ± 0.2mA (at If=0A) * 2	
Maximum current Vcc= ± 15V, Ta=85°C	If max	± 350A (at RL ≤ 5 Ω)	
Output linearity	εL	≤ ± 0.15% (at If)	
Power supply voltage	Vcc	± 12V ± 5% ~ ± 15V ± 5% (Rated output current is restricted by Vcc)	
Consumption current	Icc	≤ ± 16mA (Without Io)	
di/dt Response time (@90% of If)	tr	≤ 1μS (at di/dt=If/μs)	
Frequency characteristics @ - 1dB	f	DC...100kHz	
Thermal drift of gain	TCIo	≤ ± 0.01%/°C (Without Tclof)	
Thermal drift of offset	TCIof	≤ ± 0.5mA	
Hysteresis error	Ioh	≤ 0.3mA (at If=0A → If → If=0A)	
Insulation voltage	Vd	AC3000V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal	
Insulation resistance	RIS	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal	
Ambient Operating temperature	TA	- 40°C ~ + 85°C	
Ambient storage temperature	TS	- 40°C ~ + 90°C	
Secondary coil resistance	RS	at Ta=70°C 60 Ω at Ta=85°C 65 Ω	

* 1 : If=250A * 2 Offset current value is after removal of core hysteresis. * Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

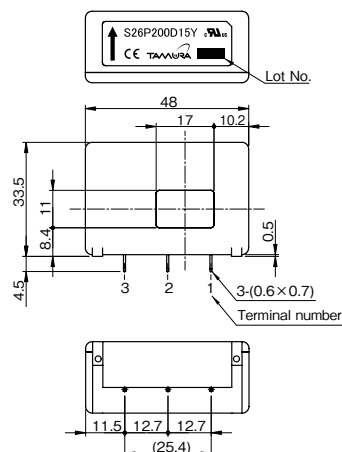

Terminal number

- 1 + Vcc
- 2 Output
- 3 - Vcc

Weight:

45g typ

Note

- 1. Unless otherwise specified, tolerances shall be ±0.5mm
- 2. Unit is [mm]

Servo system Current-output type

S27S SERIES



RoHS

SPECIFICATIONS

Ta=25°C, Vcc=±15V


Spec	Types	S27S300D15Y	S27S300D15YM
Connector	—	39-28-8040 [5566-04A-210] (Molex)	38-00-6293 [6410-03C (102)] (Molex)
Rated Current	If	300A	
Maximum Current RL : 測定抵抗 Vcc= ± 15V, Ta=85°C	If max	± 500A	
Measuring resistance at Ta=85°C If= [± ADC]	RL	± 12V	300A 0 Ω ~ 39 Ω 500A 0 Ω ~ 12 Ω
		± 15V	300A 0 Ω ~ 58 Ω 500A 0 Ω ~ 22 Ω
		± 20V	300A 15 Ω ~ 93 Ω 500A 15 Ω ~ 45 Ω
Output Current	Io	150mA (Conversion Ratio 1:2000)	
Output Current Accuracy	XG	Io ± 0.4% (without Iof)	
Offset Current	Iof	≤ ± 0.2mA (at If=0A) *1	
Output Linearity	εL	≤ ± 0.1% (at If)	
Power Supply Voltage	Vcc	± 12 ~ ± 20V	
Consumption Current	Icc	≤ ± 20mA (without Io)	
di/dt Response Time (@90% of If)	tr	≤ 1us (di/dt=100A/us)	
Thermal drift of gain	TCIo	≤ ± 0.01%/°C (without TClof)	
Thermal drift of offset	TClof	≤ ± 0.5mA max	
Hysteresis error	IoH	≤ 0.1mA (at If = 0A → If → 0A)	
Insulation voltage	Vd	AC4000V, for 1minute (sensing current 0.5mA) , inside of through hole ⇔ terminal	
Insulation resistance	RIS	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal	
Ambient Operating temperature	TA	- 40°C ~ + 85°C	
Ambient storage temperature	TS	- 40°C ~ + 90°C	
Secondary coil resistance	RS	25 Ω (Ta=70°C) 28 Ω (Ta=85°C)	

* 1 Offset current value is after removal of core hysteresis.

* Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

S27S300D15Y

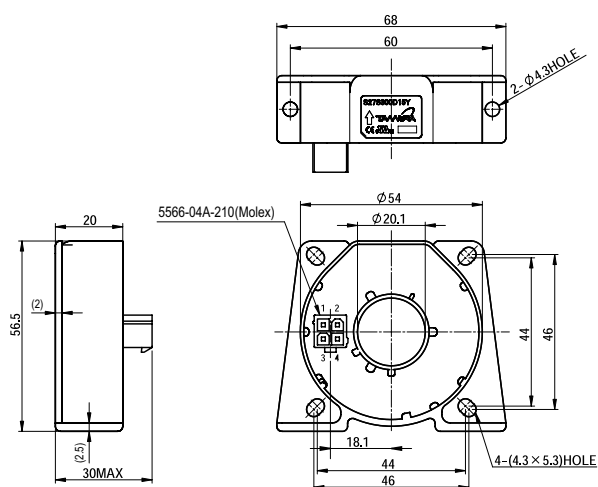

Terminal number

- 1 + Vcc
- 2 Output
- 3 - Vcc
- 4 nc


Weight:

90g typ

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5 mm
- 2. Unit is [mm]

S27S300D15YM

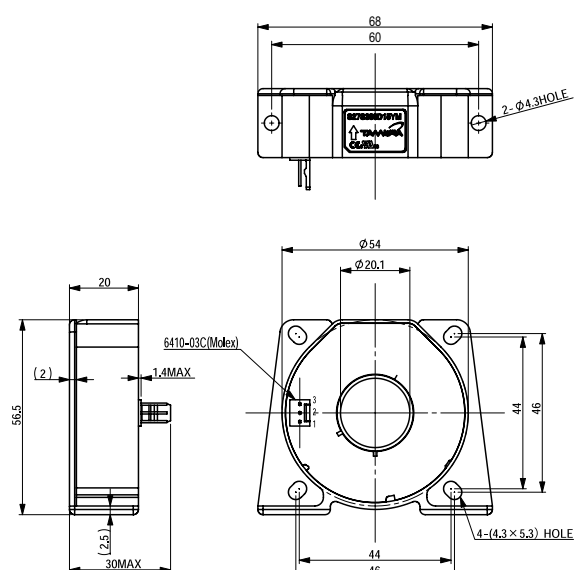

Terminal number

- 1 + Vcc
- 2 Output
- 3 - Vcc

Weight:


90g typ

Note

- 1. Unless otherwise specified, tolerances shall be ± 0.5 mm
- 2. Unit is [mm]

Servo system Current-output type

S28S SERIES

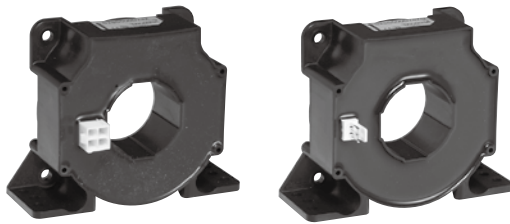

RoHS

SPECIFICATIONS

Ta=25°C, Vcc=±15V


Spec	Types	Symbol	S28S500D24Z	S28S500D24ZM
Connector	—	—	39-28-8040 [5566-04A-210] (Molex)	38-00-6293 [6410-03C (102)] (Molex)
Rated Current	If	—	500A	
Maximum Current	If max	—	± 800A	
Measuring resistance	R _L	± 15V	500A 0 Ω~ 60 Ω 800A 0 Ω~ 11 Ω	
		± 18V	500A 0 Ω~ 92 Ω 800A 0 Ω~ 30 Ω	
		± 24V	500A 5 Ω~ 149 Ω 800A 5 Ω~ 65 Ω	
Output Current	Io	—	100mA (Conversion Ratio 1:5000)	
Output Current Accuracy	X _G	—	Io ± 0.5% (without Iof)	
Offset Current	Iof	—	≤ ± 0.4mA (at If = 0A) *1	
Output Linearity	ε _L	—	≤ ± 0.1% (at If)	
Power Supply Voltage	Vcc	—	± 15 ~ ± 24V	
Consumption Current	Icc	—	≤ ± 30mA (without Io)	
di/dt Response Time (@90% of If)	tr	—	≤ 1us (di/dt=100A/us)	
Output Temperature Characteristic	TCIo	—	≤ ± 0.01%/°C (Without TClof)	
Offset Temperature Characteristic	TClof	—	≤ ± 0.4mA max	
Hysteresis allowance	I _{oH}	—	≤ ± 0.2mA max (at If = 0A → 3*If → 0A)	
Insulation Withstanding	Vd	—	AC4,000V, for 1minute (sensing current 0.5mA) inside of through hole ⇔ terminal	
Insulation Withstanding	R _{IS}	—	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal	
Operating Temperature	T _A	—	- 40°C ~ + 70°C	
Storage Temperature	T _S	—	- 40°C ~ + 85°C	
Secondary coil resistance	Rs	—	70 Ω (Ta=70°C)	

* 1 Offset current value is after removal of core hysteresis.

* Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

S28S500D24Z

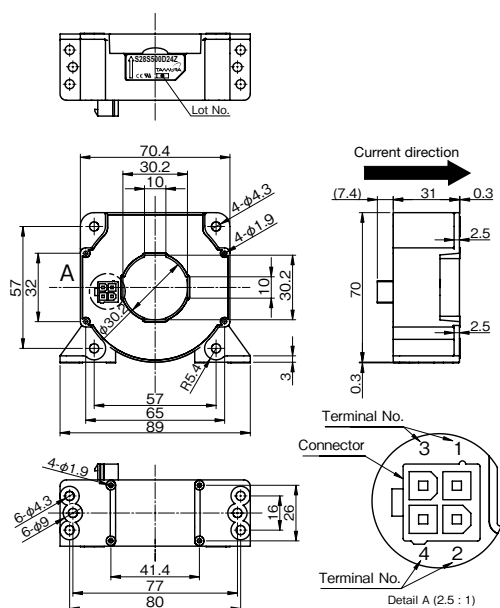

Terminal number

- 1 NC
- 2 - Vcc
- 3 OUT
- 4 + Vcc

Weight:

260g typ


Connector

Manufacturer	Part Number	Old Part Number
Molex	39-28-8040	5566-04A-210

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$
2. Unit is [mm]

S28S500D24ZM

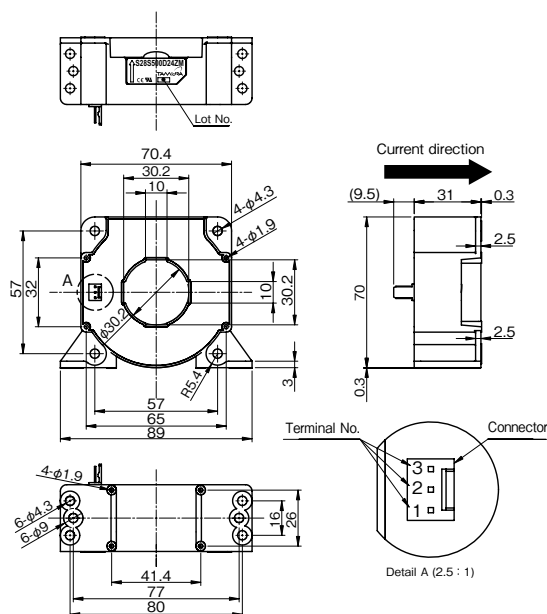

Terminal number

- 1 + Vcc
- 2 OUT
- 3 - Vcc

Weight:

260g typ

Connector

Manufacturer	Part Number	Old Part Number
Molex	38-00-6293	6410-03C (102)

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$
2. Unit is [mm]

Servo system Current-output type

S29S D24 SERIES



RoHS

SPECIFICATIONS


Ta=25°C, Vcc=±15V

Spec	Types	Symbol	S29S1T0D24Z			S29S1T0D24ZM			S29S1T0D24ZJ		
Connector		—	39-28-8040 [5566-04A-210] (Molex)			38-00-6293 [6410-03C (102)] (Molex)			BH3P-VH-1 (JST)		
Rated current		If	1000A								
Maximum current 3sec		If max	± 2100A								
Measuring resistance	R _L	± 15V	70℃	1000A 0 Ω~ 21 Ω 1200A 0 Ω~ 9 Ω 1300A 0 Ω~ 5 Ω							
			85℃	1000A 0 Ω~ 18 Ω 1200A 0 Ω~ 7 Ω							
		± 24V	70℃	1000A 0 Ω~ 60.5 Ω 1800A 0 Ω~ 14 Ω 2100A 0 Ω~ 4 Ω							
			85℃	1000A 10 Ω~ 58.5 Ω 1800A 10 Ω~ 12 Ω							
Output current		I _o	200mA (Conversion Ratio 1:5000)								
Output current accuracy		X _G	I _o ± 0.4% (without I _{of})								
Offset current		I _{of}	≤± 0.4mA (at If=0A) * 1								
Output linearity		ε _L	≤± 0.1% (at If)								
Power supply voltage		V _{cc}	± 15V (± 5%) ~± 24V (± 5%)								
Consumption current		I _{cc}	≤± 35mA (Without I _o)								
di/dt response time (@90% of If)		t _r	≤ 1us (di/dt=100A/us)								
Thermal drift of gain		TC _{lo}	≤± 0.01%/℃ (without TC _{lof})								
Thermal drift of offset		TC _{lof}	≤± 0.5mA max (at - 10℃~+ 70℃) ≤± 0.8mA max (at - 40℃~+ 85℃)								
Hysteresis error		I _{oH}	≤± 0.2mA (at If=0A ⇒ 3 × If ⇒ 0A)								
Insulation withstanding		V _d	AC4,000V, for 1minute (sensing current 0.5mA) ,inside of through hole ⇔ terminal								
Insulation resistance		R _{iS}	≥ 500M Ω (at DC500V) inside of through hole ⇔ terminal								
Ambient Operating temperature		T _A	- 40℃~+ 85℃								
Ambient storage temperature		T _S	- 40℃~+ 90℃								
Secondary coil resistance		R _s	48 Ω (Ta=70℃) 50 Ω (Ta=85℃)								

* 1 Offset current value is after removal of core hysteresis. * Temperature of the primary conductor(busbar) should not exceed 100°C .
* Please refer to the another sheet about conditions of UL Recognition.

DIMENSIONS (mm)

S29S1T0D24Z

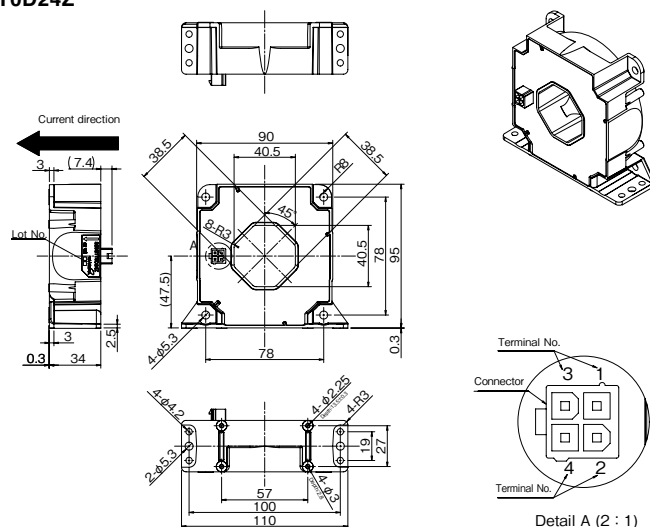

Terminal number

- | | |
|---|--------------------|
| 1 | NC (No connection) |
| 2 | +Vcc (+24V) |
| 3 | -Vcc (-24V) |
| 4 | Iout |

Connector		
Manufacturer	Part Number	Old Part Number
Molex	39-28-8040	5566-04A-210

Plating of terminal; Sn


Weight

560g typ

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$
2. Unit is [mm]

S29S1T0D24ZM

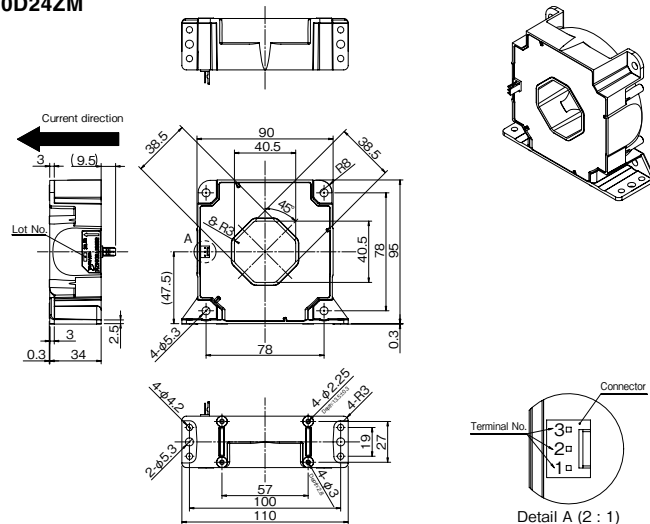

Terminal number

-
- 1 +Vcc (+24V)
 2 Iout
 3 -Vcc (-24V)

Connector		
Manufacturer	Part Number	Old Part Number
Molex	38-00-6293	6410-03C (102)

Plating of terminal; Sn


Weight

560g typ

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$
2. Unit is [mm]

S29S1T0D24ZJ

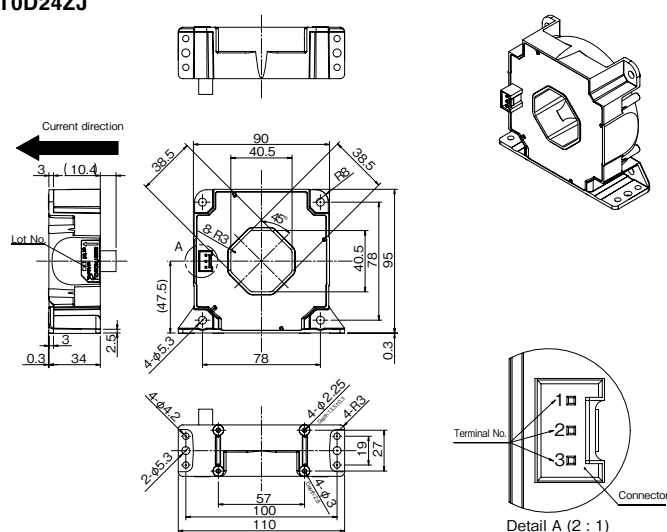

Terminal number

- 1 $-V_{CC} (-24V)$
2 I_{out}
3 $+V_{CC} (+24V)$

Connector	
Manufacturer	Part Number
JST	BH3P-VH-1

Plating of terminal; Sn

Weight

560g typ

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.5\text{mm}$
2. Unit is [mm]



TAMURA CORPORATION

HEAD OFFICE : 1-19-43, Higashi-Oizumi, Nerima-ku, Tokyo, 178-8511 Japan
<http://www.tamura-ss.co.jp>

SAKADO OFFICE

5-5-30 Chiyoda Sakado-shi Saitama 350-0214 Japan
Tel : 049-284-5711 Fax : 049-284-5715

OSAKA SALES OFFICE

Esaka-Sanshoubill 3-27-27 Tarumi-cho Suita-shi Osaka 564-0062 Japan
Tel: 06-6380-2300 Fax: 06-6385-8371

NAGOYA SALES OFFICE

3-1803, Kamiyashiro, Meito-ku, Nagoya-shi, Aichi, 465-0025 Japan
Tel: 052-701-1210 Fax: 052-701-1295

TAMURA CORPORATION OF CHINA LIMITED

13F, Block A, International Shopping Centre Shanghai No.527 Huaihai Zhong Road, Shanghai, China
Tel : 86-21-6387-9388 Fax : 86-21-6387-9268

TAMURA ELECTRONICS(S.Z.)CO.,LTD.

3014, Ban Xue Gang Street, Ban Tian Community, Ban Tian Subdistrict, Long Gang District,
Shen Zhen City, China
Tel : 86-755-8950-2603 Fax : 86-755-8950-2325

TAMURA CORPORATION OF KOREA

#514, Hyundai I-Valley 223-12, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-714, Korea
Tel : 82-2-489-5354 Fax : 82-2-489-5360

TAMURA ELECTRONICS(M)SDN.BHD.

Lot No.1, Jalan SS 8/6, Sungai Way Free Industrial Zone, 47300 Petaling Jaya, Selangor, Malaysia
Tel : 60-3-7680-9000 Fax : 60-3-7876-3300

TAMURA CORPORATION OF AMERICA

1040 South Andreasen Drive, Ste.100 Escondido, CA 92029 U.S.A.
Tel : 1-951-699-1270 Fax : 1-951-676-9482

TAMURA EUROPE LIMITED.

Clark Avenue Porte Marsh Industrial Estate Calne Wiltshire SN11 9BS United Kingdom
TEL : 44(0)-1380-731-700 FAX : 44(0)-1380-731-703