



Description:

- RF Circulator
- Frequency Range: 1030MHz - 1090MHz
- Direction: CW Clockwise
- BeO free
- RoHS compliant
- Packaging: Tray

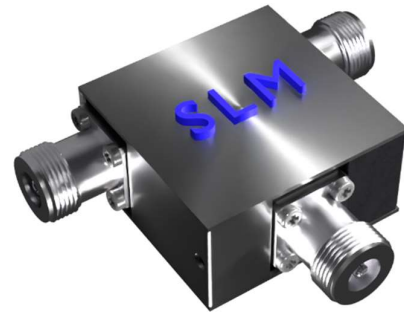

Block Diagram:




Specifications:

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Range		1030		1090	MHz
Operating Temperature Range		-30		85	°C
Storage Temperature Range		-40		95	°C
Average Power				500	W
Peak Power				4000	W
Insertion Loss				0.30	dB
Return Loss		23			dB
Isolation		23			dB


Notes:

1. All specifications apply over the operating temperature range unless otherwise stated.

Unit Dimensions:

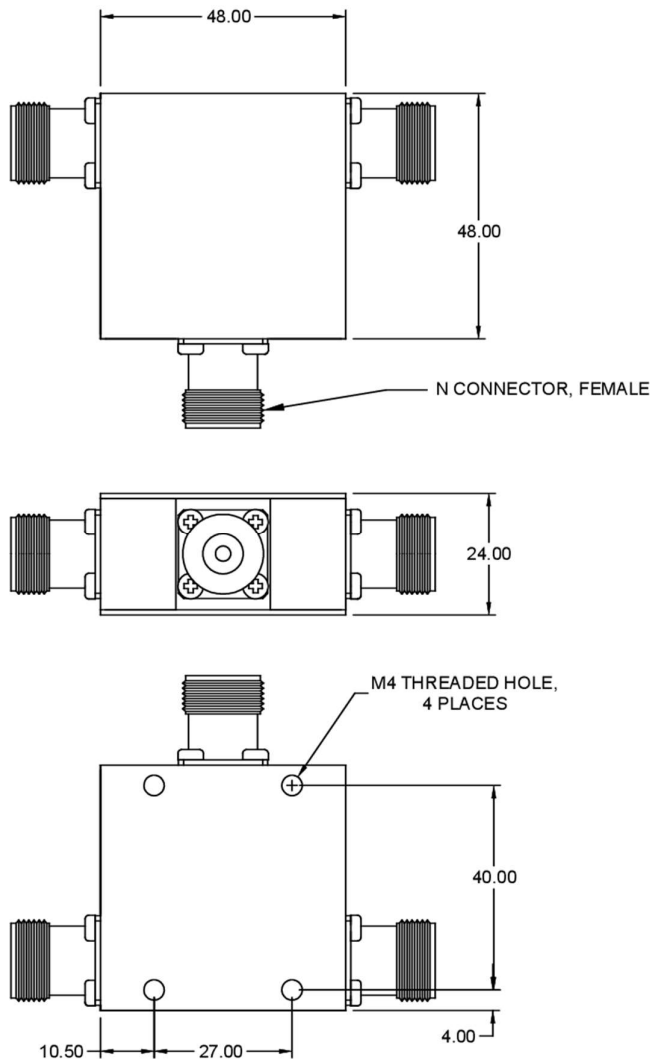

OD-0071

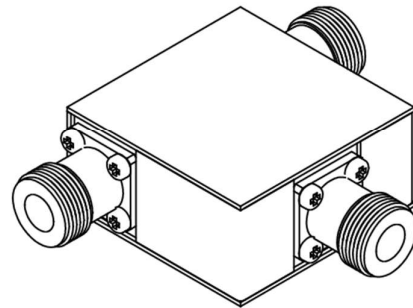

Notes:

1. All dimensions in mm unless otherwise stated.
2. Tolerance is ± 0.20 mm unless otherwise stated.
3. Unit is RoHS compliant.