


Description:

- RF Circulator
- Frequency Range: 4000MHz - 8000MHz
- Direction: CW Clockwise
- BeO free
- RoHS compliant
- Packaging: Tray

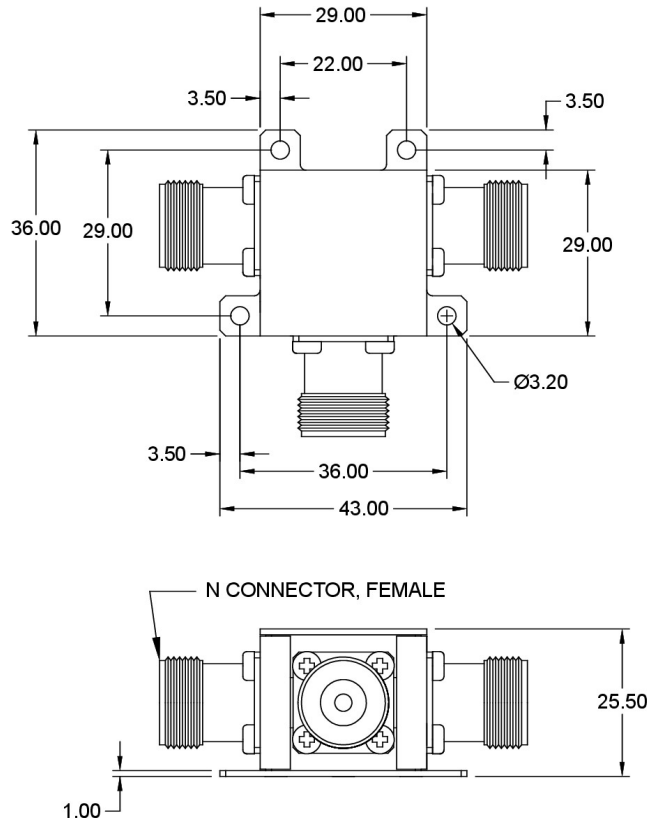

Block Diagram:

Specifications:

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Range		4000		8000	MHz
Operating Temperature Range		10		85	°C
Storage Temperature Range		-40		125	°C
Average Power				150	W
Peak Power				300	W
Insertion Loss				0.50	dB
Return Loss		18			dB
Isolation		18			dB

Notes:

1. All specifications apply over the operating temperature range unless otherwise stated.

Unit Dimensions:



Notes:

1. All dimensions in mm unless otherwise stated.
2. Tolerance is $\pm 0.20\text{mm}$ unless otherwise stated.
3. Unit is RoHS compliant.