



Commercial CCR-59

Multi-Throw DC-26.5GHz

Latching

The CCR-59 Switch is a broadband, multi-throw, electromechanical coaxial switch designed to switch a microwave signal from a common input to any of 3, 4, 5, or 6 outputs. The characteristic impedance is 50 Ohms. The switches are small using the popular connector spacing on a 1.062" dia. circle. Each position has an individual actuator mechanism allowing random position selection. This also minimizes switching time.

Specifications

RF Contacts:

Break before make

Actuator

Voltage (VDC) 20°C

Latching Current (mA)

Reset Current (mA)

Positions	12	15	28
	255	205	90
3	765	615	270
4	1020	820	360
5	1275	1025	450
6	1530	1230	540

Switching Time:

20 msec max

Connectors:

SMA (f)

Weight:

6 oz. max

Temperature Range:

-40°C to +65°C (Operating)

The CCR-59 comes with a latching actuator. The latching switch remains in the last position selected when the switch is de-energized. STD dual command requires a reset pulse before a new selected position. A separate reset circuit allows all positions to be set to an open position. User must provide both reset (clear) and set (select new position) commands.

Shock:

MIL-STD-202 Method 213, Condition D (500G Non Operating)

Vibration:

MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)


Humidity:

Moisture Seal Available

MTBF:

6.5 Million Hours (MIL-HDBK-217F Fixed, 25°C, <1 Cycle per hour)

RF Power Handling

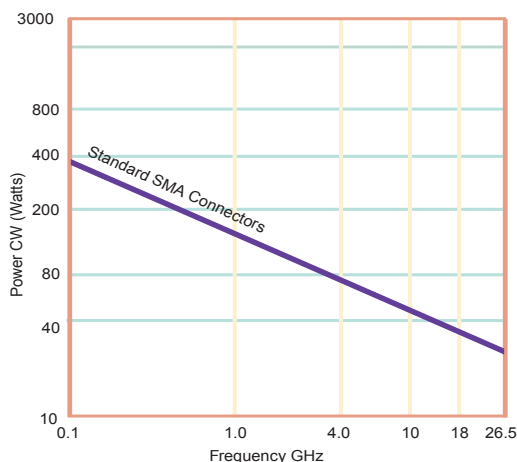


Specifications

VSWR (max)
Insertion Loss (min)
Isolation (max)

DC-6 GHz	6-12 GHz	12-18 GHz	18-26.5 GHz
1.25:1	1.40:1	1.50:1	1.80:1
0.20 dB	0.40 dB	0.50 dB	0.80 dB
70.0 dB	60.0 dB	60.0 dB	50.0 dB

Typical Performance

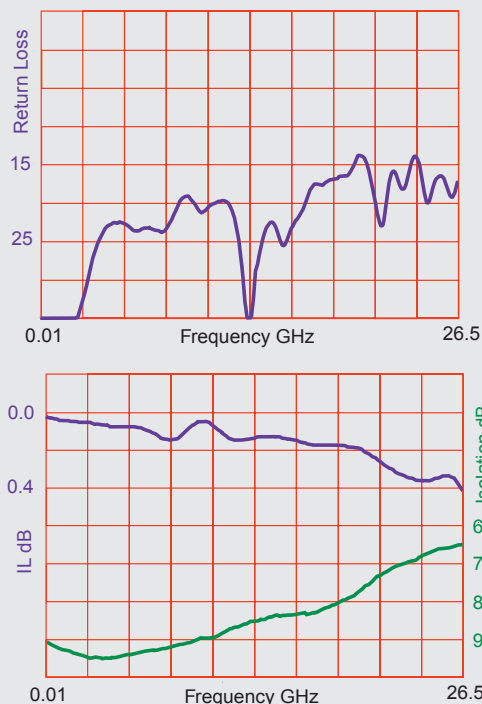

TELEDYNE
COAX SWITCHES

Specifications subject to change without notice.






www.teledynecoax.com
email: coax@teledyne.com

Tel: (800) 351-7368
10/2007

Commercial CCR-59


Multi-Throw DC-26.5GHz

Latching

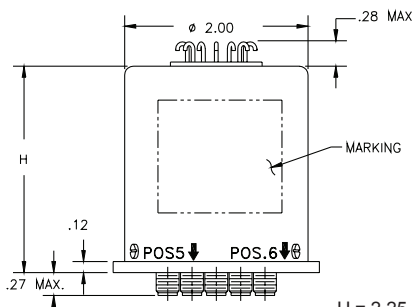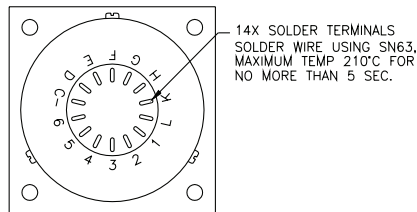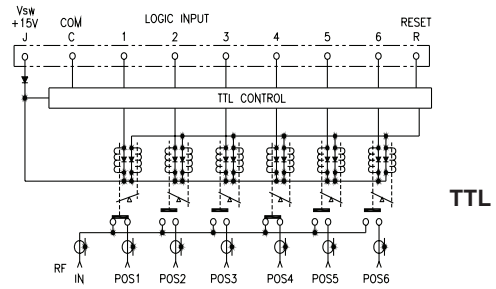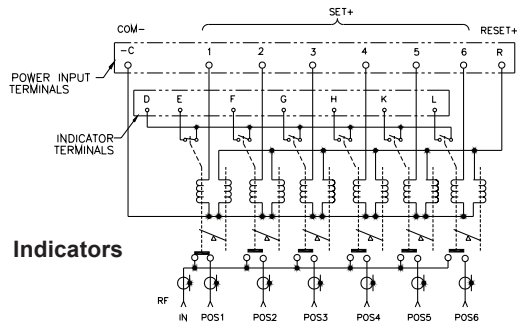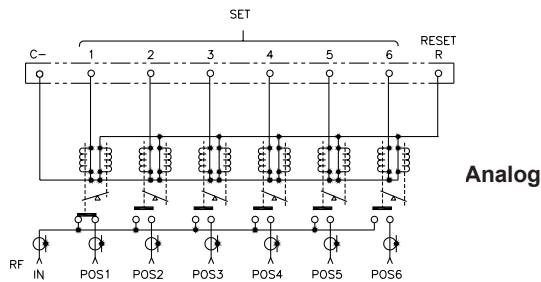


H = 2.25 STD Model
H = 2.50 TTL Model


SP3T




SP5T



SP6T

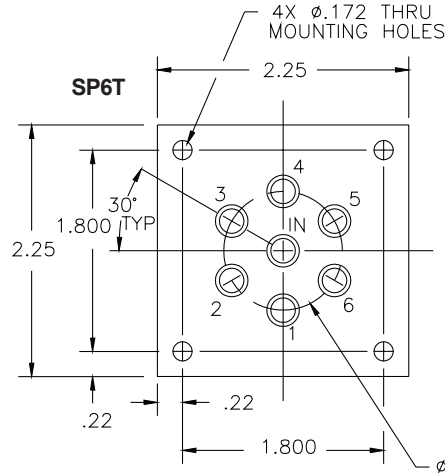

SP4T



Part Numbering System for CCR-59 (Latching)

CCR-59 S 6 5 O - T

Series _____ Options _____
Connectors _____ Actuator Type _____
Actuator Voltage _____ Number of Switch Positions _____

Connector

S: SMA Female

Actuator Voltage

6: 28Vdc Latching
7: 15Vdc Latching
8: 12Vdc Latching

Number of Positions

3: SP3T
4: SP4T
5: SP5T
6: SP6T

Actuator Type

O: No Indicator Contacts
C: Indicator Contacts
D: Self Cutoff Only
E: Indicators and Self Cutoff

Options

T: TTL Drivers with Diodes
R: Positive + Common
TD: TTL Driver with Decoder

For other options contact Factory



Specifications subject to change without notice.

www.teledynecoax.com
email: coax@teledyne.com

Tel: (800) 351-7368

10/2007