

Features

- Low Loss
- Narrow Bandwidth
- Excellent Return Loss

Description

Pin mounted, silver (Ag) coated ceramic filter. Developed for use in TCAS applications.

Weight: 21 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a bracket consisting of Olin 770 Copper Alloy (Cu, Zn, Ni)

Filter Complies with RoHS Standards


Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25°C	Spec. @ 25°C	Spec. @ -40°C to +85°C
Passband Insertion Loss	1027-1033	0.7 dB	1.0 dB max	1.2 dB max
Passband Return Loss	1027-1033	18.0 dB	14.0 dB min	12.0 dB min
Attenuation	910	44.0 dB	40.0 dB min	40.0 dB min

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance

Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

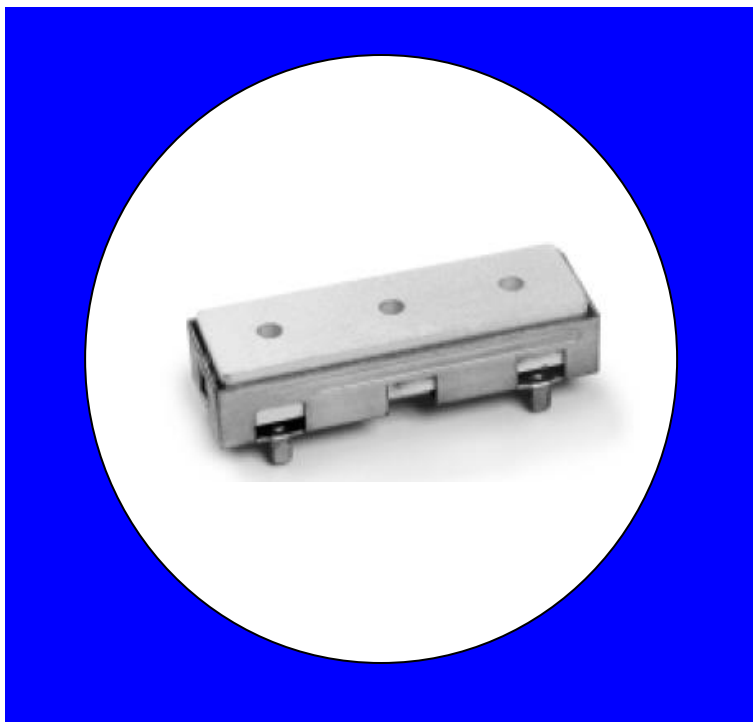


Mechanical Drawing


Preliminary A – Origin Date: July 22, 2015– Revision Date: Dec 16, 2021

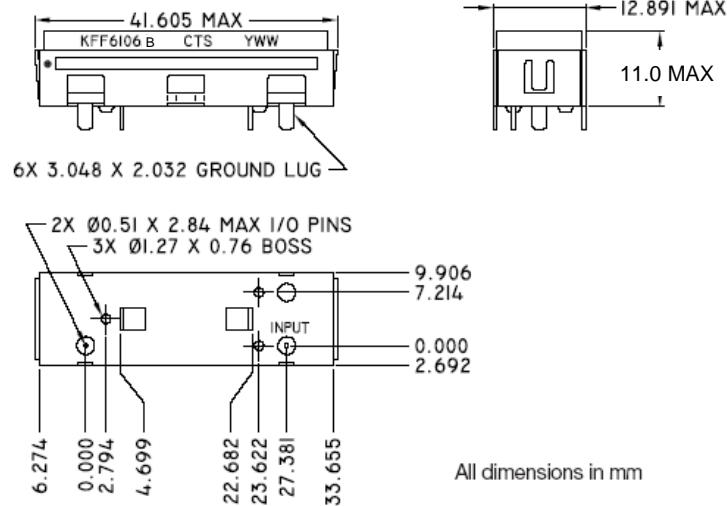


Electrical response

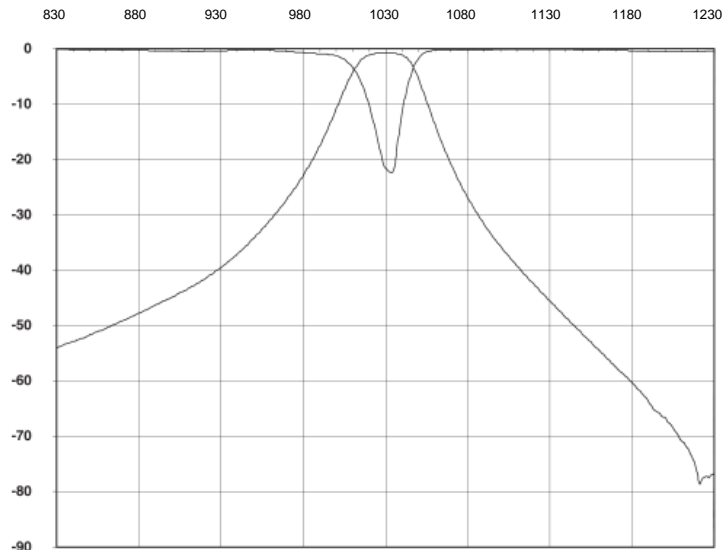

PCB Layout

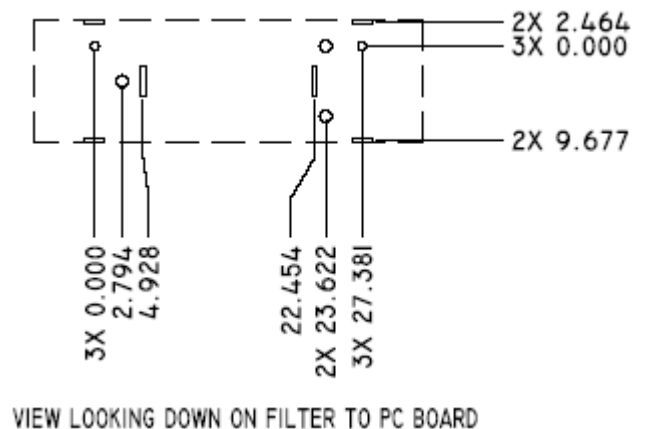

Packaging and Marking

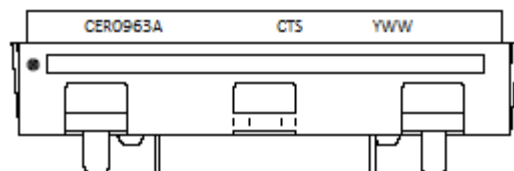

This product is shipped in pre-formed foam trays.



5 10 Slot foam Trays
(100 max. per box)