




- ① REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- ② MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER -
GLASS FILLED POLYESTER, UL 94V-0.
- ③ FINISH: CONTACT AND SHIELD
MATING AREA - 0.76 μ m MIN GOLD OVER 1.27 μ m MIN NICKEL
COMPLIANT PIN AREA - 0.5 μ m MIN BRIGHT TIN-LEAD OVER 1.27 μ m MIN NICKEL
- ④ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- ⑤ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- ⑥ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT,
DAUGHTER BOARD,
COMPONENT SIDE SHOWN
SCALE 4:1

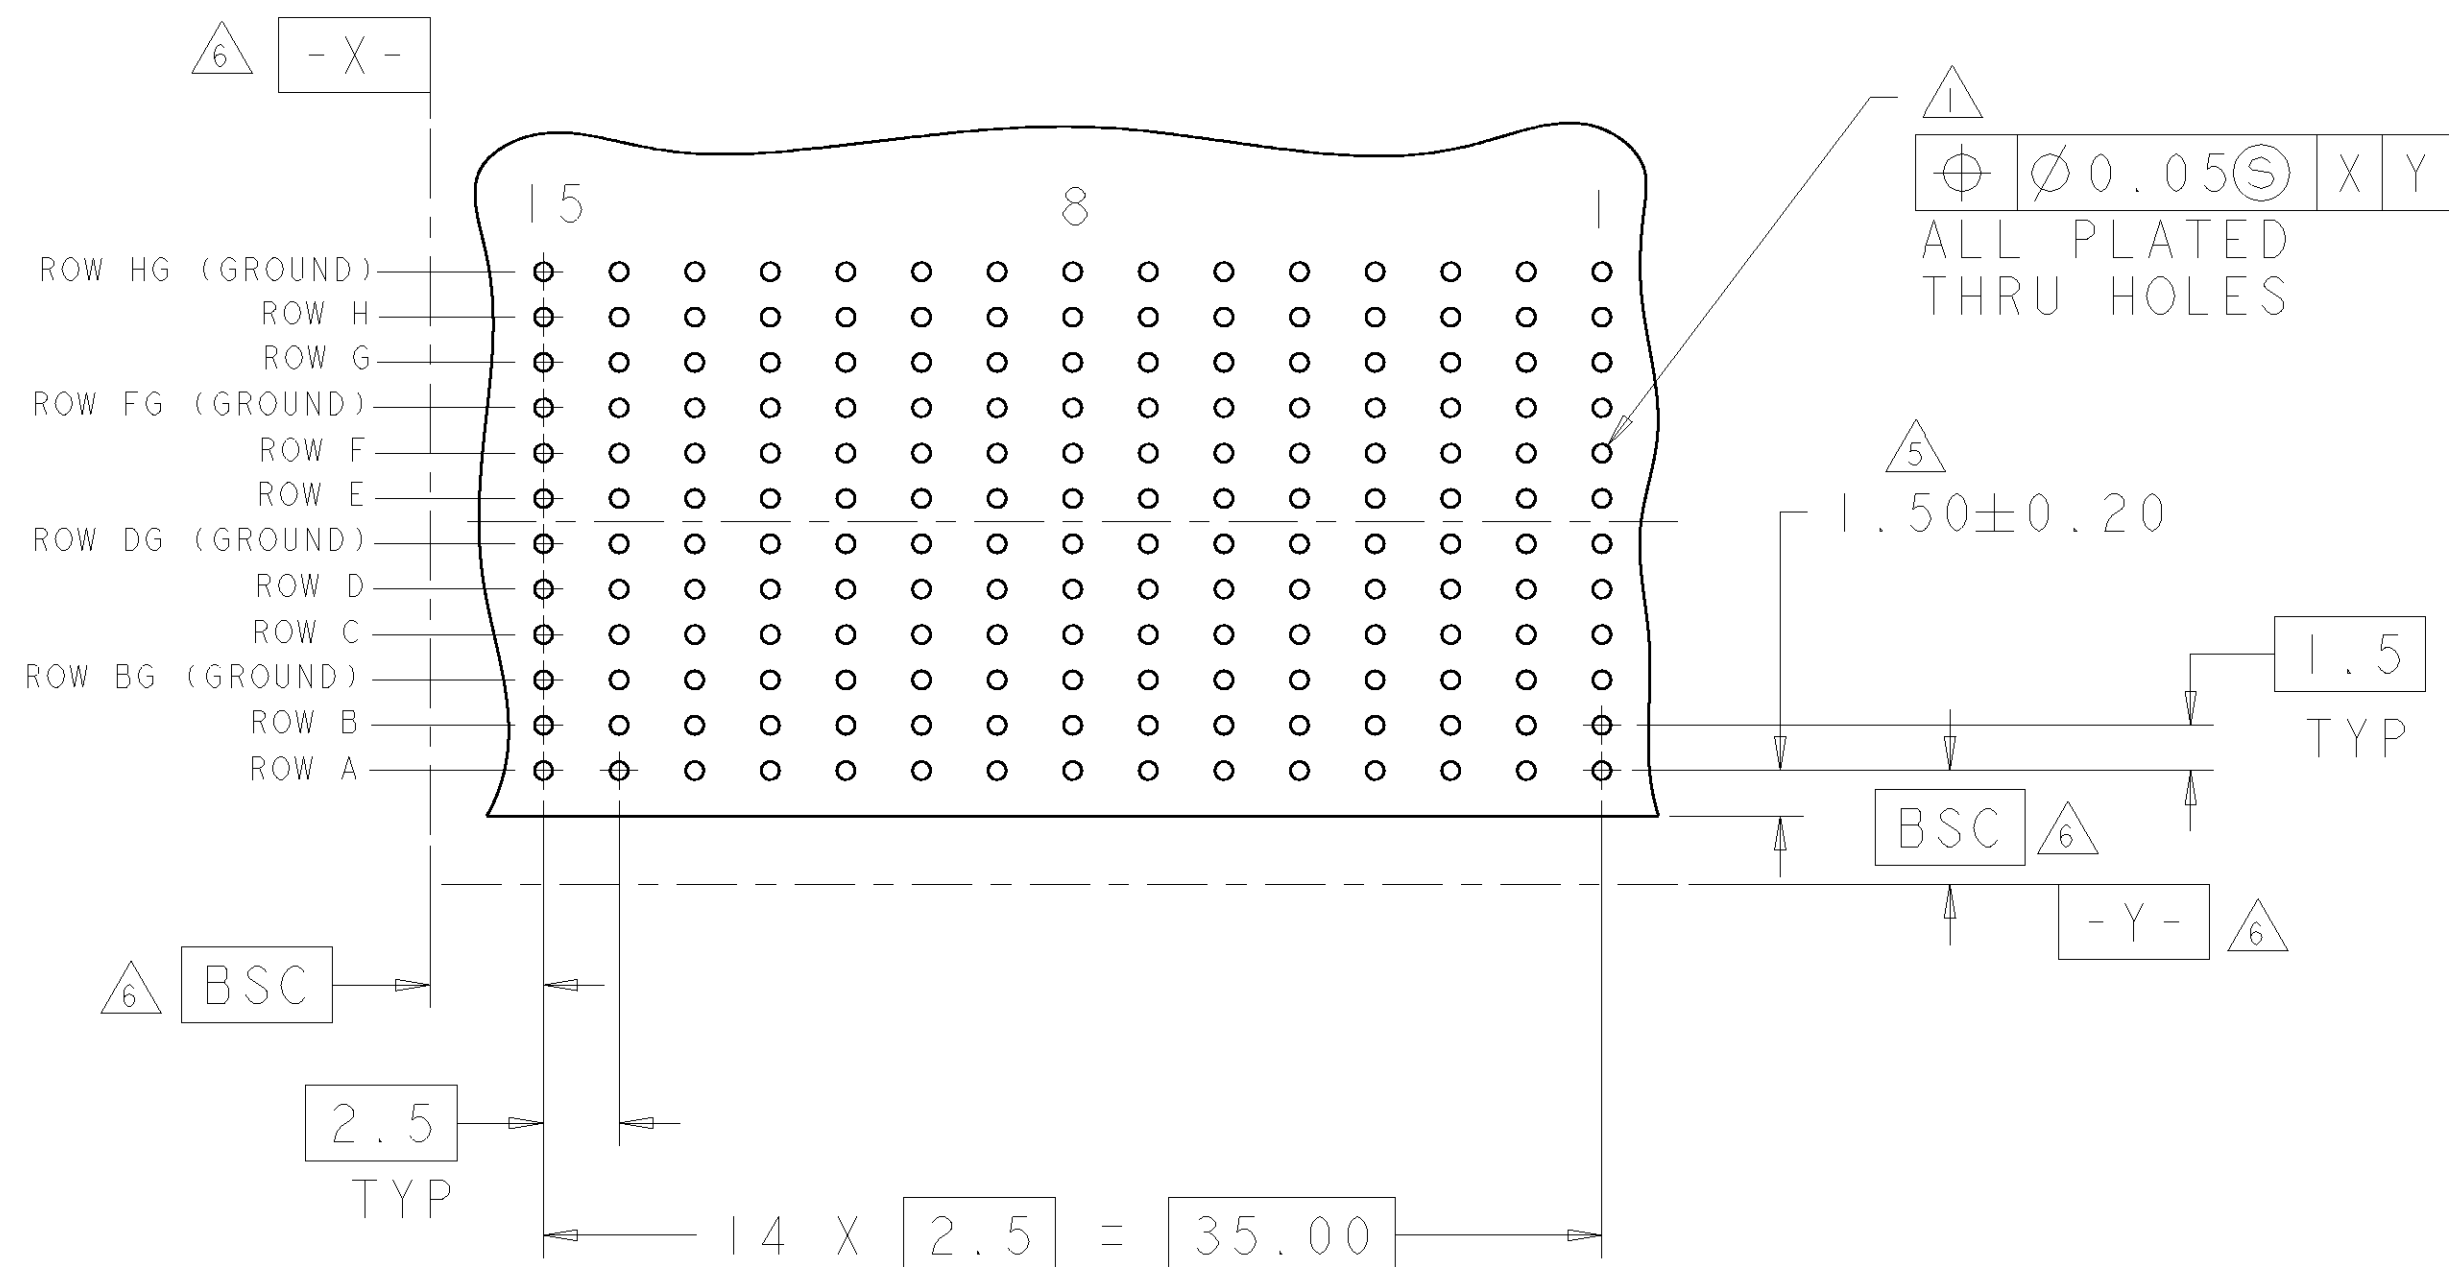