


DIES for RFA-4005-20

Crimp Tool Handle


Crimp Dies for RFA-4005-20.p65

RFA-4005-01





For RG-58/U, RG-59/U, RG-142/U, RG-223/U, RG-400/U, RG-8X, Proflex and various video cables, cavity dimensions: .052", .068", .100", .213" and .255".

RFA-4005-02





For RG-8/U, RG-213/U, RG-214/U, and Belden 9913 cables, cavity dimensions: .100", .128" and .429". The .128" cavity crimps the center pin on Belden 9913 cable.

RFA-4005-04




.228", .068", .305", for RG-58/U, RG-59/U, RG-62/U and Cambridge Connectors Series CP-88 and CP-89

RFA-4005-05




.155", .184", and .215

RFA-4005-06




.255", .324", .354" for RG-59/U, RG-6/U, and F-Type (CATV) coax connectors

RFA-4005-07




.213", .178", .068", .042", for RG-58/U, RG-174/U coax connectors (RFI Cable Groups B & C)

RFA-4005-08




.318", .255", .068", .042", for RG-59/U and Belden 8281 coax cable (RFI Cable Groups D & G)

RFA-4005-09




.178", .128", .068", for RG-174/U, RG-188/U, RG-316/U and Mini 59/U coax connectors (RFI Cable Group B)

RFA-4005-10



.080", .100", .429" for RG-8/U, RG-11/U and RG-213/U (RFI Cable Group E)

RFA-4005-12

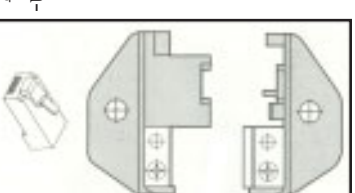

For RJ-45, 8 position keyed or non-keyed modular plug, with stripping and cutting for 8 conductors wire

RFA-4005-14



Crimps coaxial connectors on Belden 9913, LMR®-400; .429", .118" hex cavities

RFA-4005-15



For RJ-11, 2, 4 or 6 position modular plug, with stripping and cutting for 2, 4, 6 conductors wire

RFA-4005-16



For 6 DEC plug, with stripping and cutting for 6 conductors wire

RFA-4005-17



For RJ-45 amp plug, with stripping and cutting for 8 conductors wire

RFA-4005-18



For 10 position modular plug with stripping and cutting for 10 conductors wire

RFA-4005-21



For non-insulated terminals AWG 22-8

RFA-4005-22



For non-insulated flag terminals from 0.5 to 2.5 sq.mm. AWG 22-18, 16-14

RFA-4005-23



For cord end terminals from 0.5 to 10 sq.mm. AWG 22-8

RFA-4005-24



For insulated terminals from 0.5 to 6 sq.mm. AWG 22-18, 16-14, 12-10

RFA-4005-25



For non-insulated open barrel terminal from 0.5 to 6 sq.mm. AWG 22-18, 16-14, 12-10

RFA-4005-26



For non-insulated terminals and cable lugs from 1.5 to 6 sq.mm. AWG 22-18, 16-14, 12-10

RFA-4005-27



For non-insulated terminals DIN 46234 from 0.5 to 10 sq.mm. AWG 22-18, 16-14, 12-10, and 8