

Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX: 864-843-3800

Catalog Number: DCM742T200DF2B

Customer Part Number: JC00144

Datasheet No.: 4353

Date: 07/29/98

Capacitance: 7400 μ F

Tolerance: - 10% + 50%

Working Volts: 200VDC

Surge Volts: 250VDC

Leakage Current @ 25°C: 3700 μ A

ESR @ 120Hz @ 25°C: 0.032 Ω max.

Ripple Current @ 120 Hz, 85°C: 10.7A

Diameter (D): 3.000 $\pm$ 0.031 inches

Length (L): 5.625 $\pm$ 0.062 inches


Total Length, W/Insulation (TL): 5.890 $\pm$ 0.062 inches

Terminal Spacing (S): 1.25 $\pm$ 0.016 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

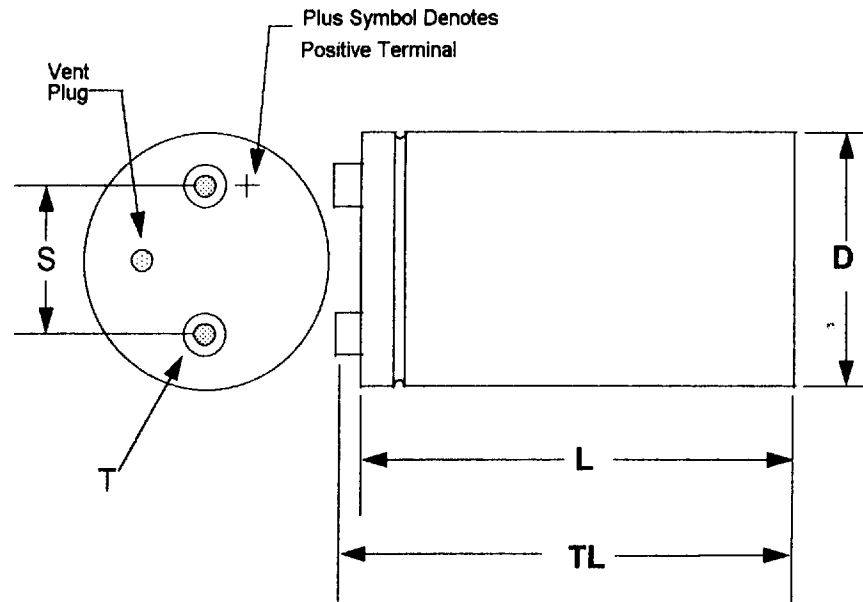

"Controlled Copy" if viewed on CD Server or stamped in RED, Otherwise considered as an "Uncontrolled Copy"