

Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Catalog Number: DCM763U040DF2A

Customer Part Number: None

Datasheet No.: 3183

Date: 09/03/96

Capacitance: 76000 μ F

Tolerance: - 10% + 75%

Working Volts: 40VDC

Surge Volts: 50VDC

Leakage Current @ 25°C: 6000 μ A

ESR @ 120Hz @ 25°C: 0.009 Ω max.

Ripple Current @ 120 Hz, 85°C: 17.8A

Diameter (D): 3.000 \pm 0.031 inches

Length (L): 5.625 \pm 0.062 inches


Total Length, W/Insulation (TL): 5.703 \pm 0.062 inches

Terminal Spacing (S): 1.250 \pm 0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

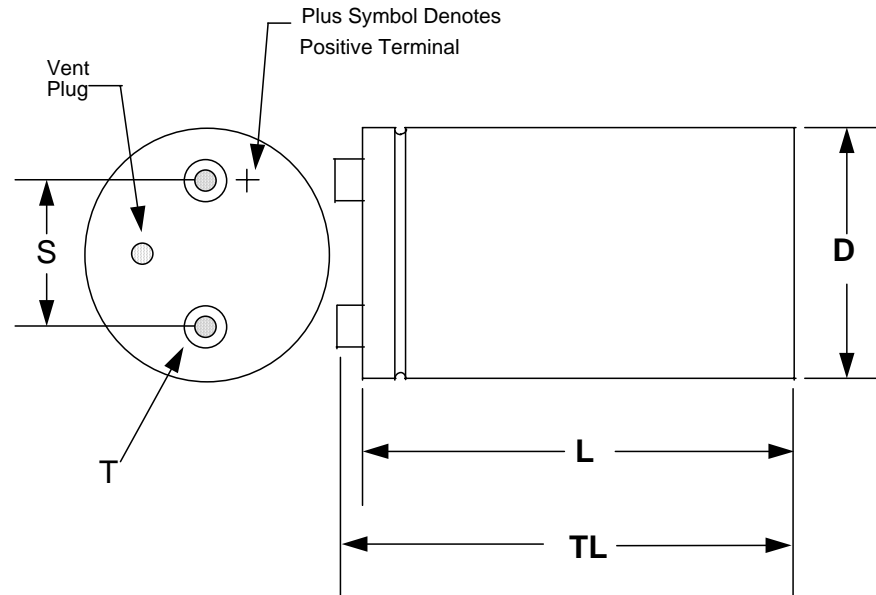

“Controlled Copy” if viewed on CD Server or if copy is stamped
in Red, Otherwise considered as an “Uncontrolled Copy”