

Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Catalog Number: DCMCE1664

Customer Part Number: None

Datasheet No. 6415

Date: 06/12/02

Capacitance: 1500 μ F

Tolerance: - 10% + 20 %

Working Volts: 400VDC

Surge Volts: 450VDC

Leakage Current @ 25°C: 4647 μ A

ESR @ 120Hz @ 25°C: 0.090 Ω max.

Ripple Current @120 Hz, 85°C: 5.0A

Diameter (D): 2.000 $\pm$ 0.031 inches

Length (L): 3.625 $\pm$ 0.062 inches

Total Length, W/Insulation (TL): 3.839 $\pm$ 0.062 inches

Terminal Spacing (S): 0.875 $\pm$ 0.016 inches

Terminal Thread (T): M5 X 0.8-13H

Insulation: PVC


Operating Temperature: - 40°C ~ + 85°C

Company: Evergreen

Approved by: _____

Title: _____

Date: _____

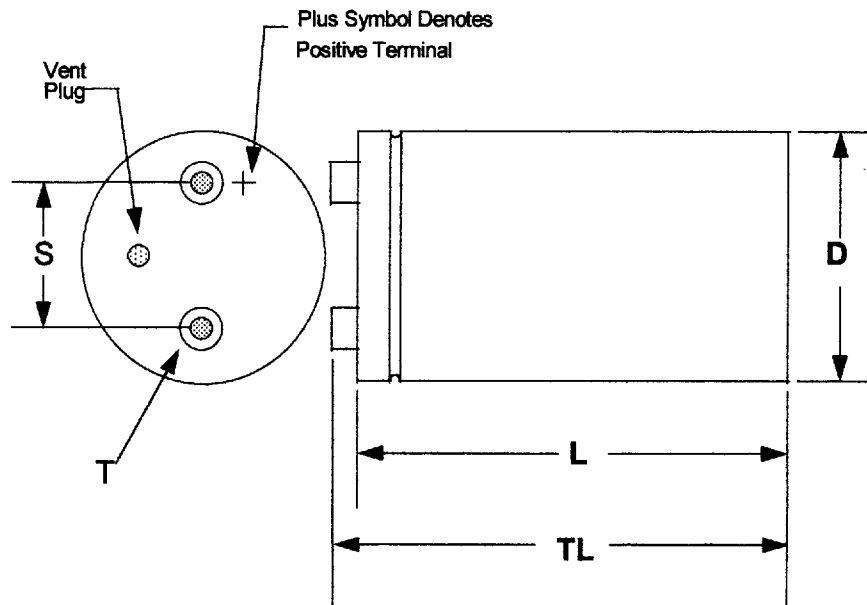

Special Requirements: Black sleeves.

<u>Revision</u>	<u>Changes</u>	<u>Date</u>
0	Original	06/12/02