

Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX: 864-843-3800

Catalog Number: DCMCE1670

Customer Part Number: None

Datasheet No. 6421

Date: 06/13/02

Capacitance: 6800 μ F

Tolerance: - 10% + 20 %

Working Volts: 400VDC

Surge Volts: 450VDC

Leakage Current @ 25°C: 6000 μ A

ESR @ 120Hz @ 25°C: 0.024 Ω max.

Ripple Current @ 120 Hz, 85°C: 14.2A

Diameter (D): 3.000 $\pm$ 0.031 inches

Length (L): 5.625 $\pm$ 0.062 inches

Total Length, W/Insulation (TL): 5.890 $\pm$ 0.062 inches

Terminal Spacing (S): 1.250 $\pm$ 0.016 inches

Terminal Thread (T): M6 x 1-6H

Insulation: PVC


Operating Temperature: - 40°C ~ + 85°C

Company: Evergreen

Approved by: _____

Title: _____

Date: _____

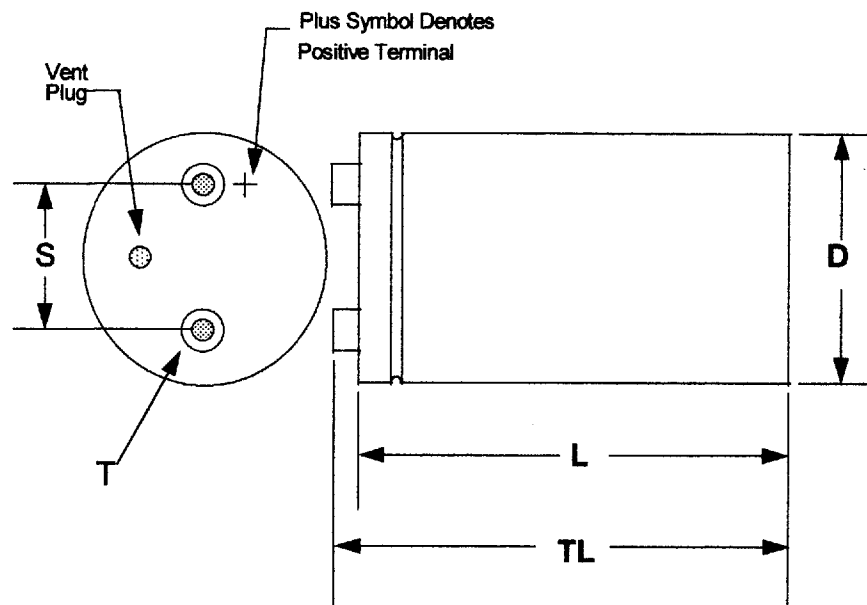

Special Requirements: Black Sleeves.

<u>Revision</u>	<u>Changes</u>	<u>Date</u>
0	Original	06/13/02