

## Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc  
Liberty, South Carolina  
TEL: 864-843-2277 FAX:864-843-3800

Catalog Number: DCMX323U040AC2B

Customer Part Number: None

Datasheet No.: 4073

Date: 02/24/98

Capacitance: 32000 $\mu$ F

Tolerance: - 10% + 75%

Working Volts: 40VDC

Surge Volts: 50VDC

Leakage Current @ 25°C: 6000 $\mu$ A

ESR @ 120Hz @ 25°C: 0.021 $\Omega$  max.

Ripple Current @ 120 Hz, 85°C: 7.0A

Diameter (D): 1.375  $\pm$  0.031 inches

Length (L): 4.125  $\pm$  0.062 inches


Total Length, W/Insulation (TL): 4.390  $\pm$  0.062 inches

Terminal Spacing (S): 0.500  $\pm$  0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

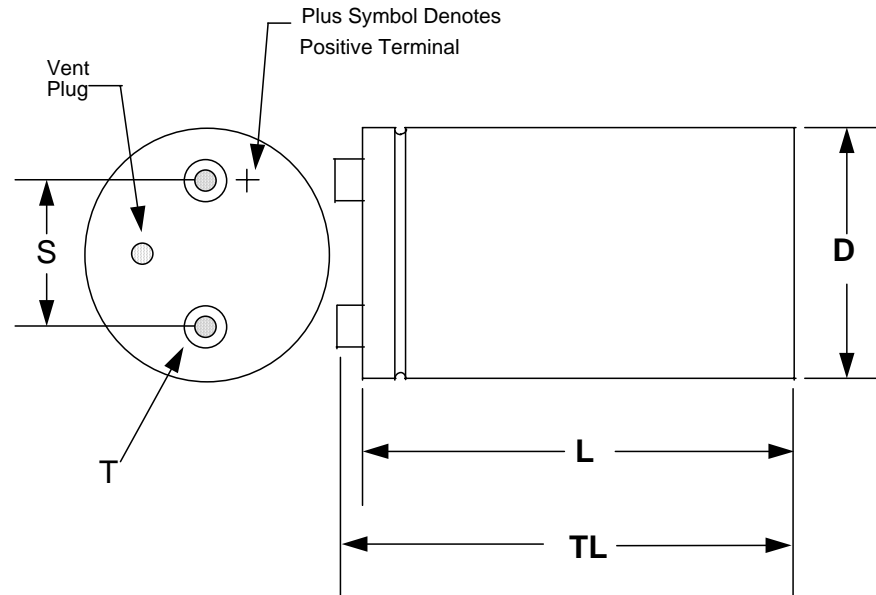

“Controlled Copy” if viewed on CD Server or if copy is stamped  
in Red, Otherwise considered as an “Uncontrolled Copy”