




REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

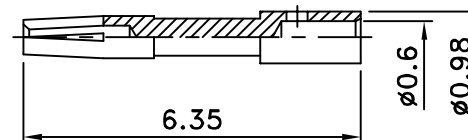

RECOMMENDED
CABLE STRIPPING DIM'S

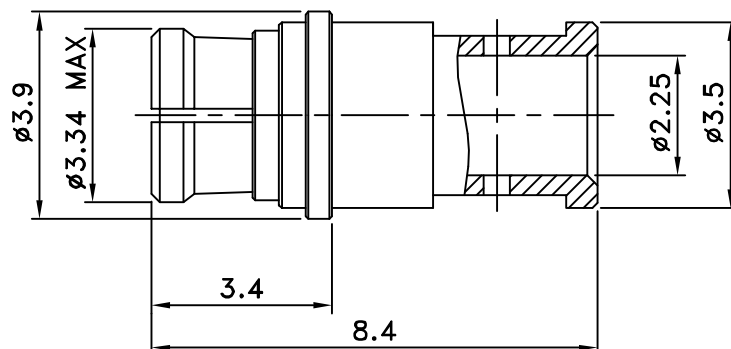

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1.GOLD PL. 3 MIN. THICK OVER NICKEL PL. 70 MIN.
 THICK OVER COPPER STRIKE
 2.GOLD PL. 30 MIN. THICK OVER NICKEL PL. 70 MIN.
 THICK OVER COPPER STRIKE

Cable:.085"

4	Sleeve	1	Brass	NOTE 1	PART NO. 2020A504-085		* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES 0.5-6=±0.2 6-30=±0.4 30-120=±0.6 120-315=±1.0 ANGLES=±1°				Bomar Interconnect Products,Inc			
3	Dielectric	1	Teflon	None	APPROVED DATE 09/27/12						TITLE SMP DIRECT SOLDER JACK			
2	Pin	1	Beryllium	NOTE 2	CHECKED DATE 09/27/12						DRAWING NO. ASSMP-43004-AL-TGG			REV A
1	Body	1	Beryllium	NOTE 1	DRAWN DATE 09/27/12						Kai			
											SCALE 8/1		UNIT mm	FILE NO. W:\AS\ASSMP\ASSMP-43004-AL-TGG Bomar->20120928
NO	Description	Q'ty	Material	Finish										