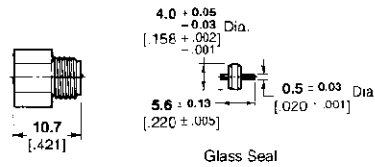
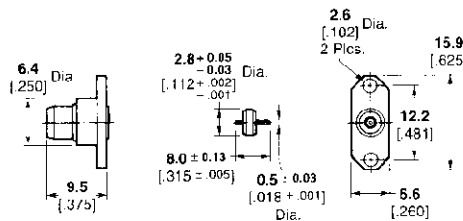


OSP Miniature Modular Blind Mate Connectors (Continued)
Hermetically Sealed (Continued)**Field Replaceable
Solder and Braze-In**
(Continued)**Panel Feedthrough Jack
Receptacle**






VSWR (GHz)	RF Leakage (dB)	Plating	M/A-COM Model No.	Part No.
1.05 + .01f	-(90-1GHz)	Passivated stainless steel	4558-5329-02	1059671-1

Recommended Mounting Detail B or E follows at bottom of this page.

**2-Hole Flange Mount Plug
Receptacle With EMI/RFI
Gasket - 0.5 [.018] Dia.
Contact**

VSWR (GHz)	RF Leakage (dB)	Plating	M/A-COM Model No.	Part No.
1.05 + .01f	-(90-1GHz)	Passivated stainless steel	4551-3357-02	1059572-1

Recommended Mounting Detail D follows at bottom of this page.

**Recommended
Mounting Hole Detail****Detail A*****Detail B* (6.35 [.250] Panel Thickness)****Detail C*****Detail D*****Detail E***

*Consult appropriate Instruction Sheet for complete mounting details.