
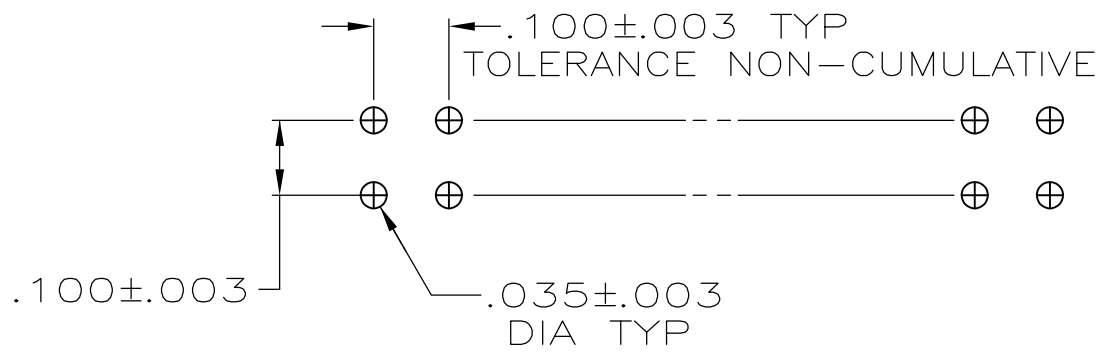


LOC	DIST	REVISIONS				
		REV	DATE	BY	APP'D	
GP	00	K	REVISED PER ECO-08-005380	10JUN2008	ZMR	SLB

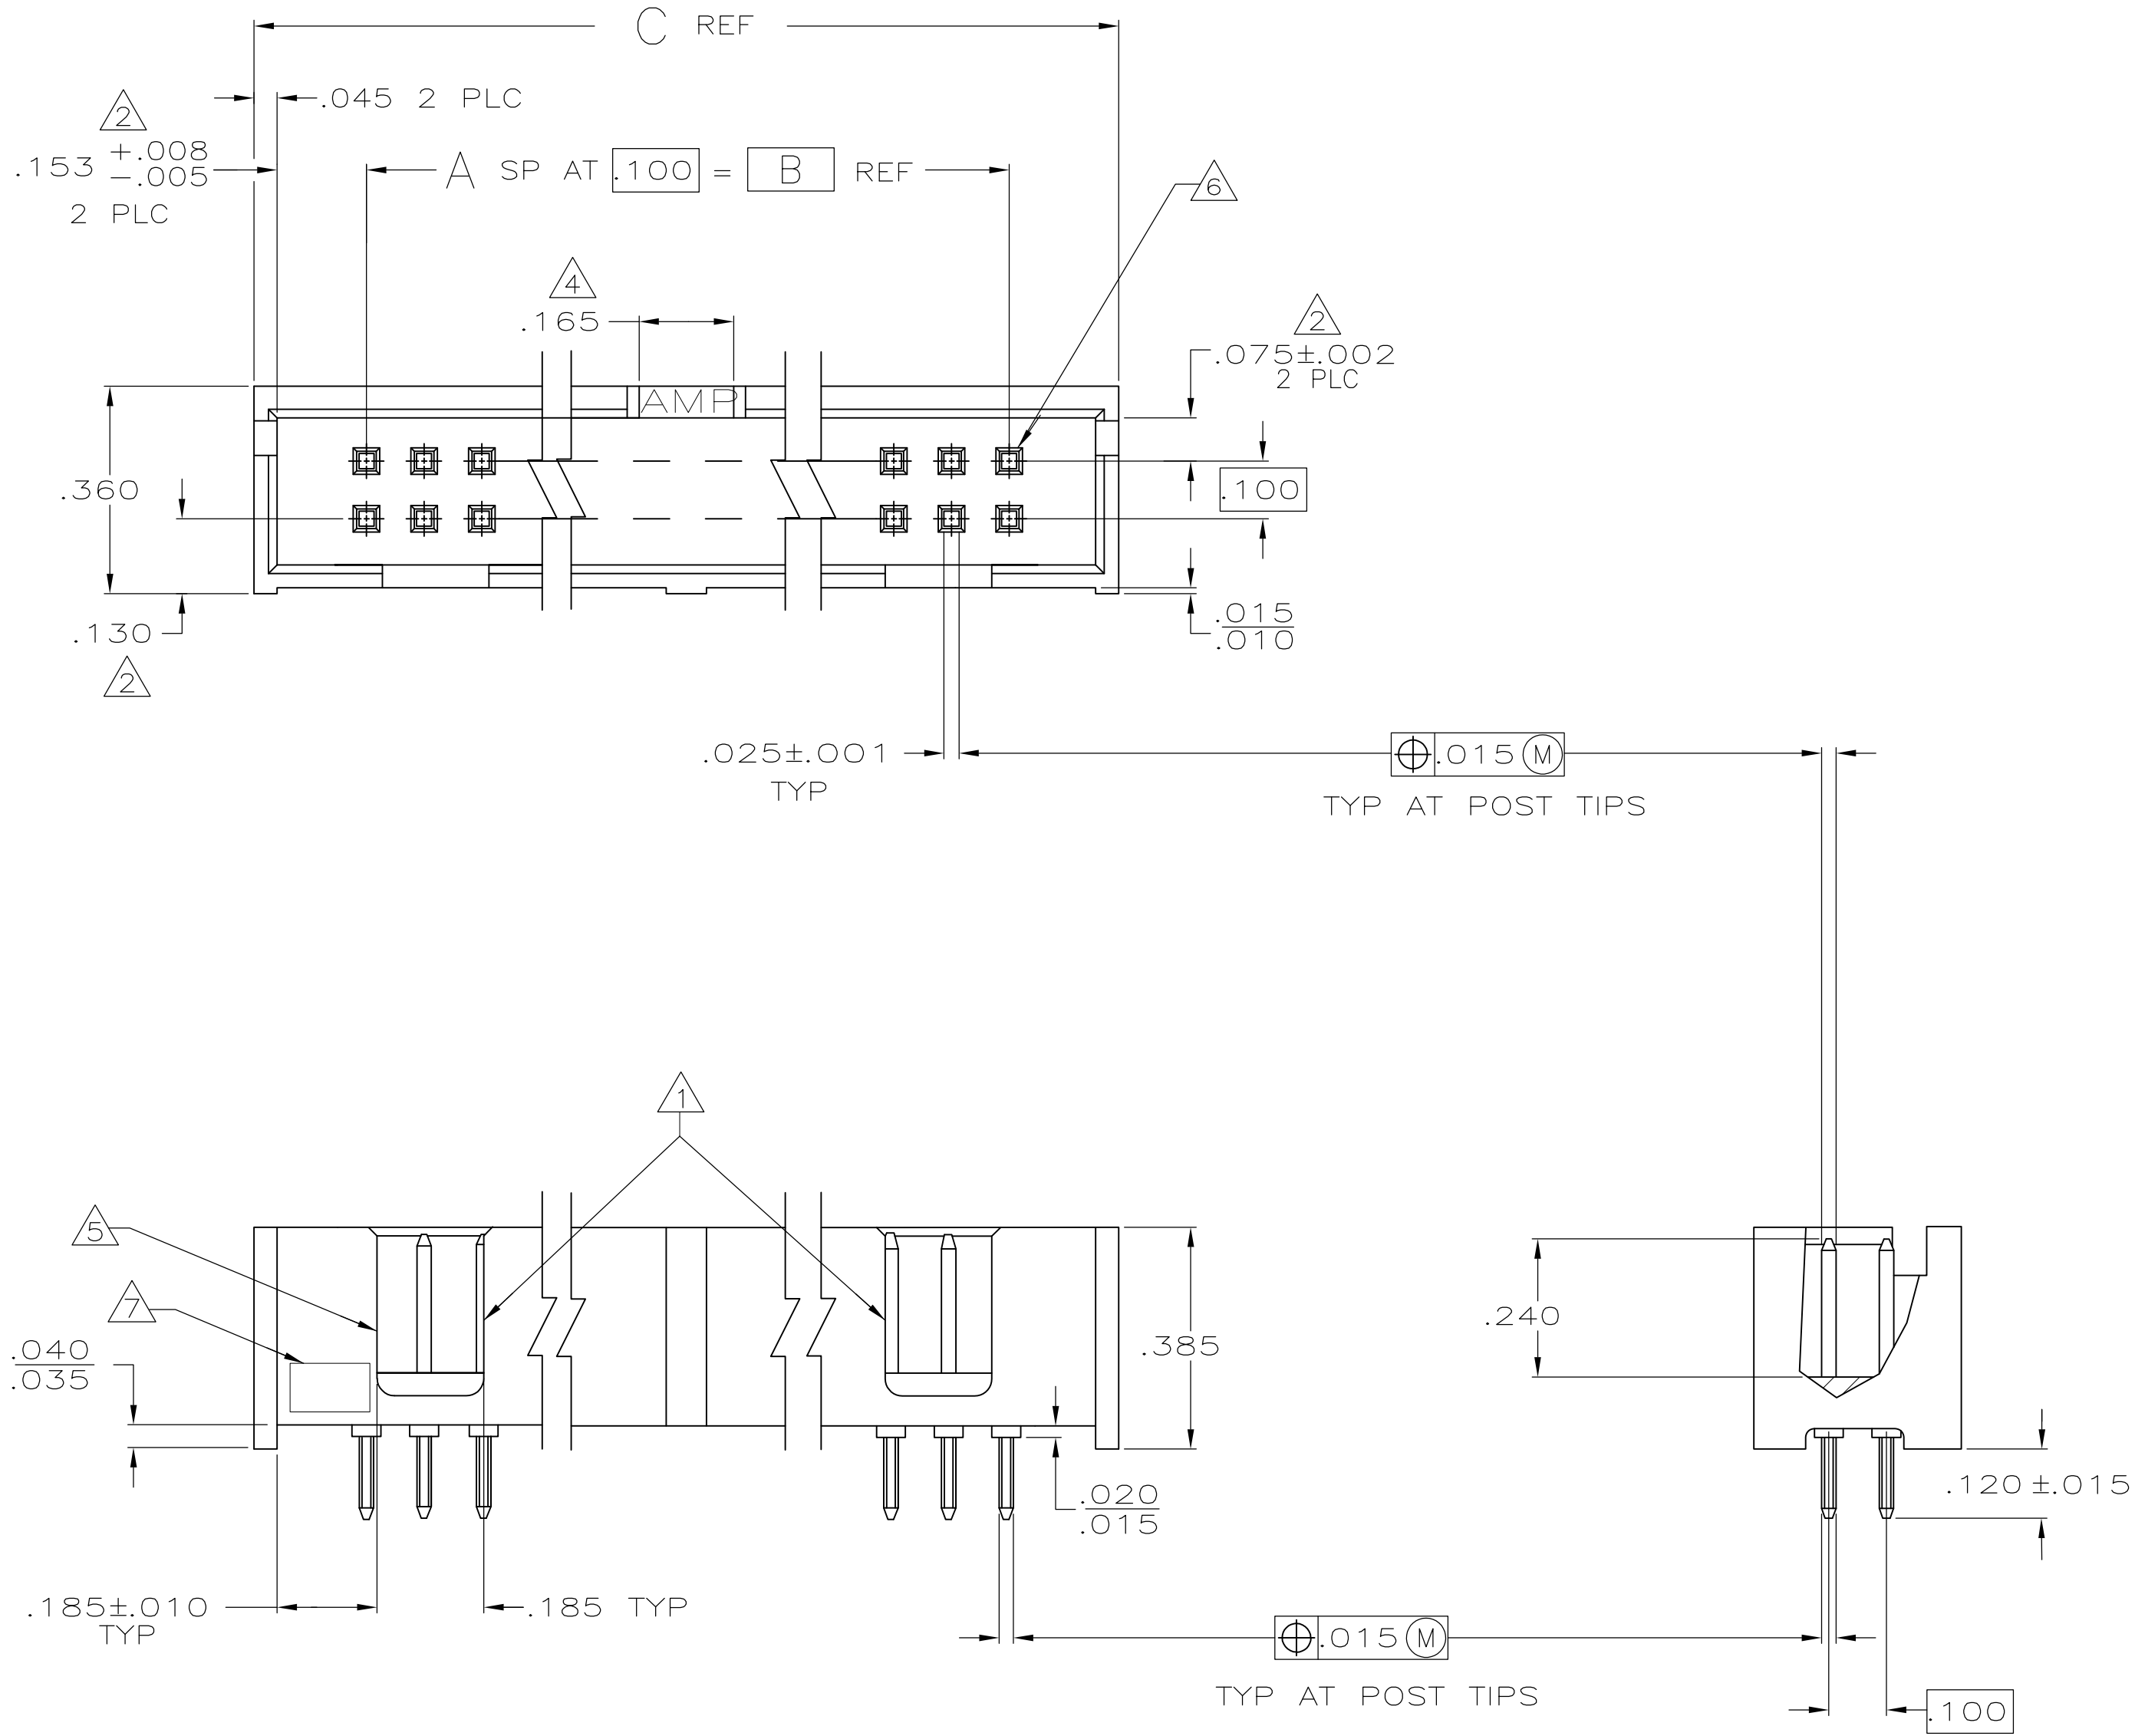

RECOMMENDED HOLE LAYOUT FOR MANUAL INSERTION

	1.500	1.100	1 1	24	1-103308-3
	3.300	2.900	29	60	1-103308-2
OBSOLETE	3.100	2.700	27	56	1-103308-1
	2.800	2.400	24	50	1-103308-0
OBSOLETE	2.500	2.100	21	44	103308-9
	2.300	1.900	19	40	103308-8
	2.000	1.600	16	34	103308-7
	1.600	1.200	12	26	103308-6
	1.300	.900	9	20	103308-5
OBSOLETE	1.200	.800	8	18	103308-4
	1.100	.700	7	16	103308-3
	1.000	.600	6	14	103308-2
	.800	.400	4	10	103308-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. MOLL CHK L. MEYER APP'D R. FEIDT	8-27-87 9-03-87 9-03-87	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	PRODUCT SPEC 108-40018 APPLICATION SPEC -	
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± .005		
MATERIAL: HOUSING: GLASS FILLED NYLON, FLAME RETARDANT, BLACK POSTS: BRASS		FINISH ANGLES	± -	SIZE A1	CAGE CODE 00779
		WEIGHT	-	DRAWING NO 103308	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1