

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
H	—		H	EHC0-0061-04	07-04-04	JvdH
			J	ECR-06-028929	19-03-07	BSV
			K	ECR-07-021980	27-09-07	BSV



APVD	
—	
KMA	
KMA	

D

C

B

A

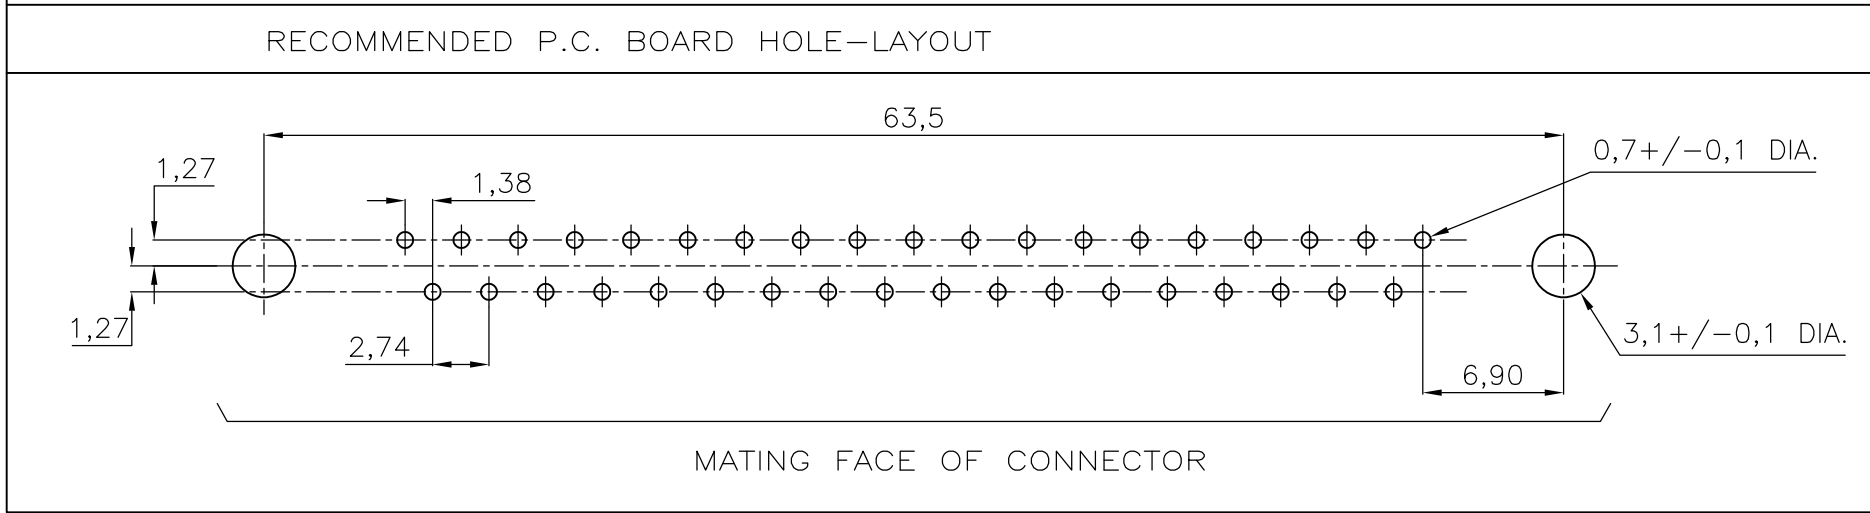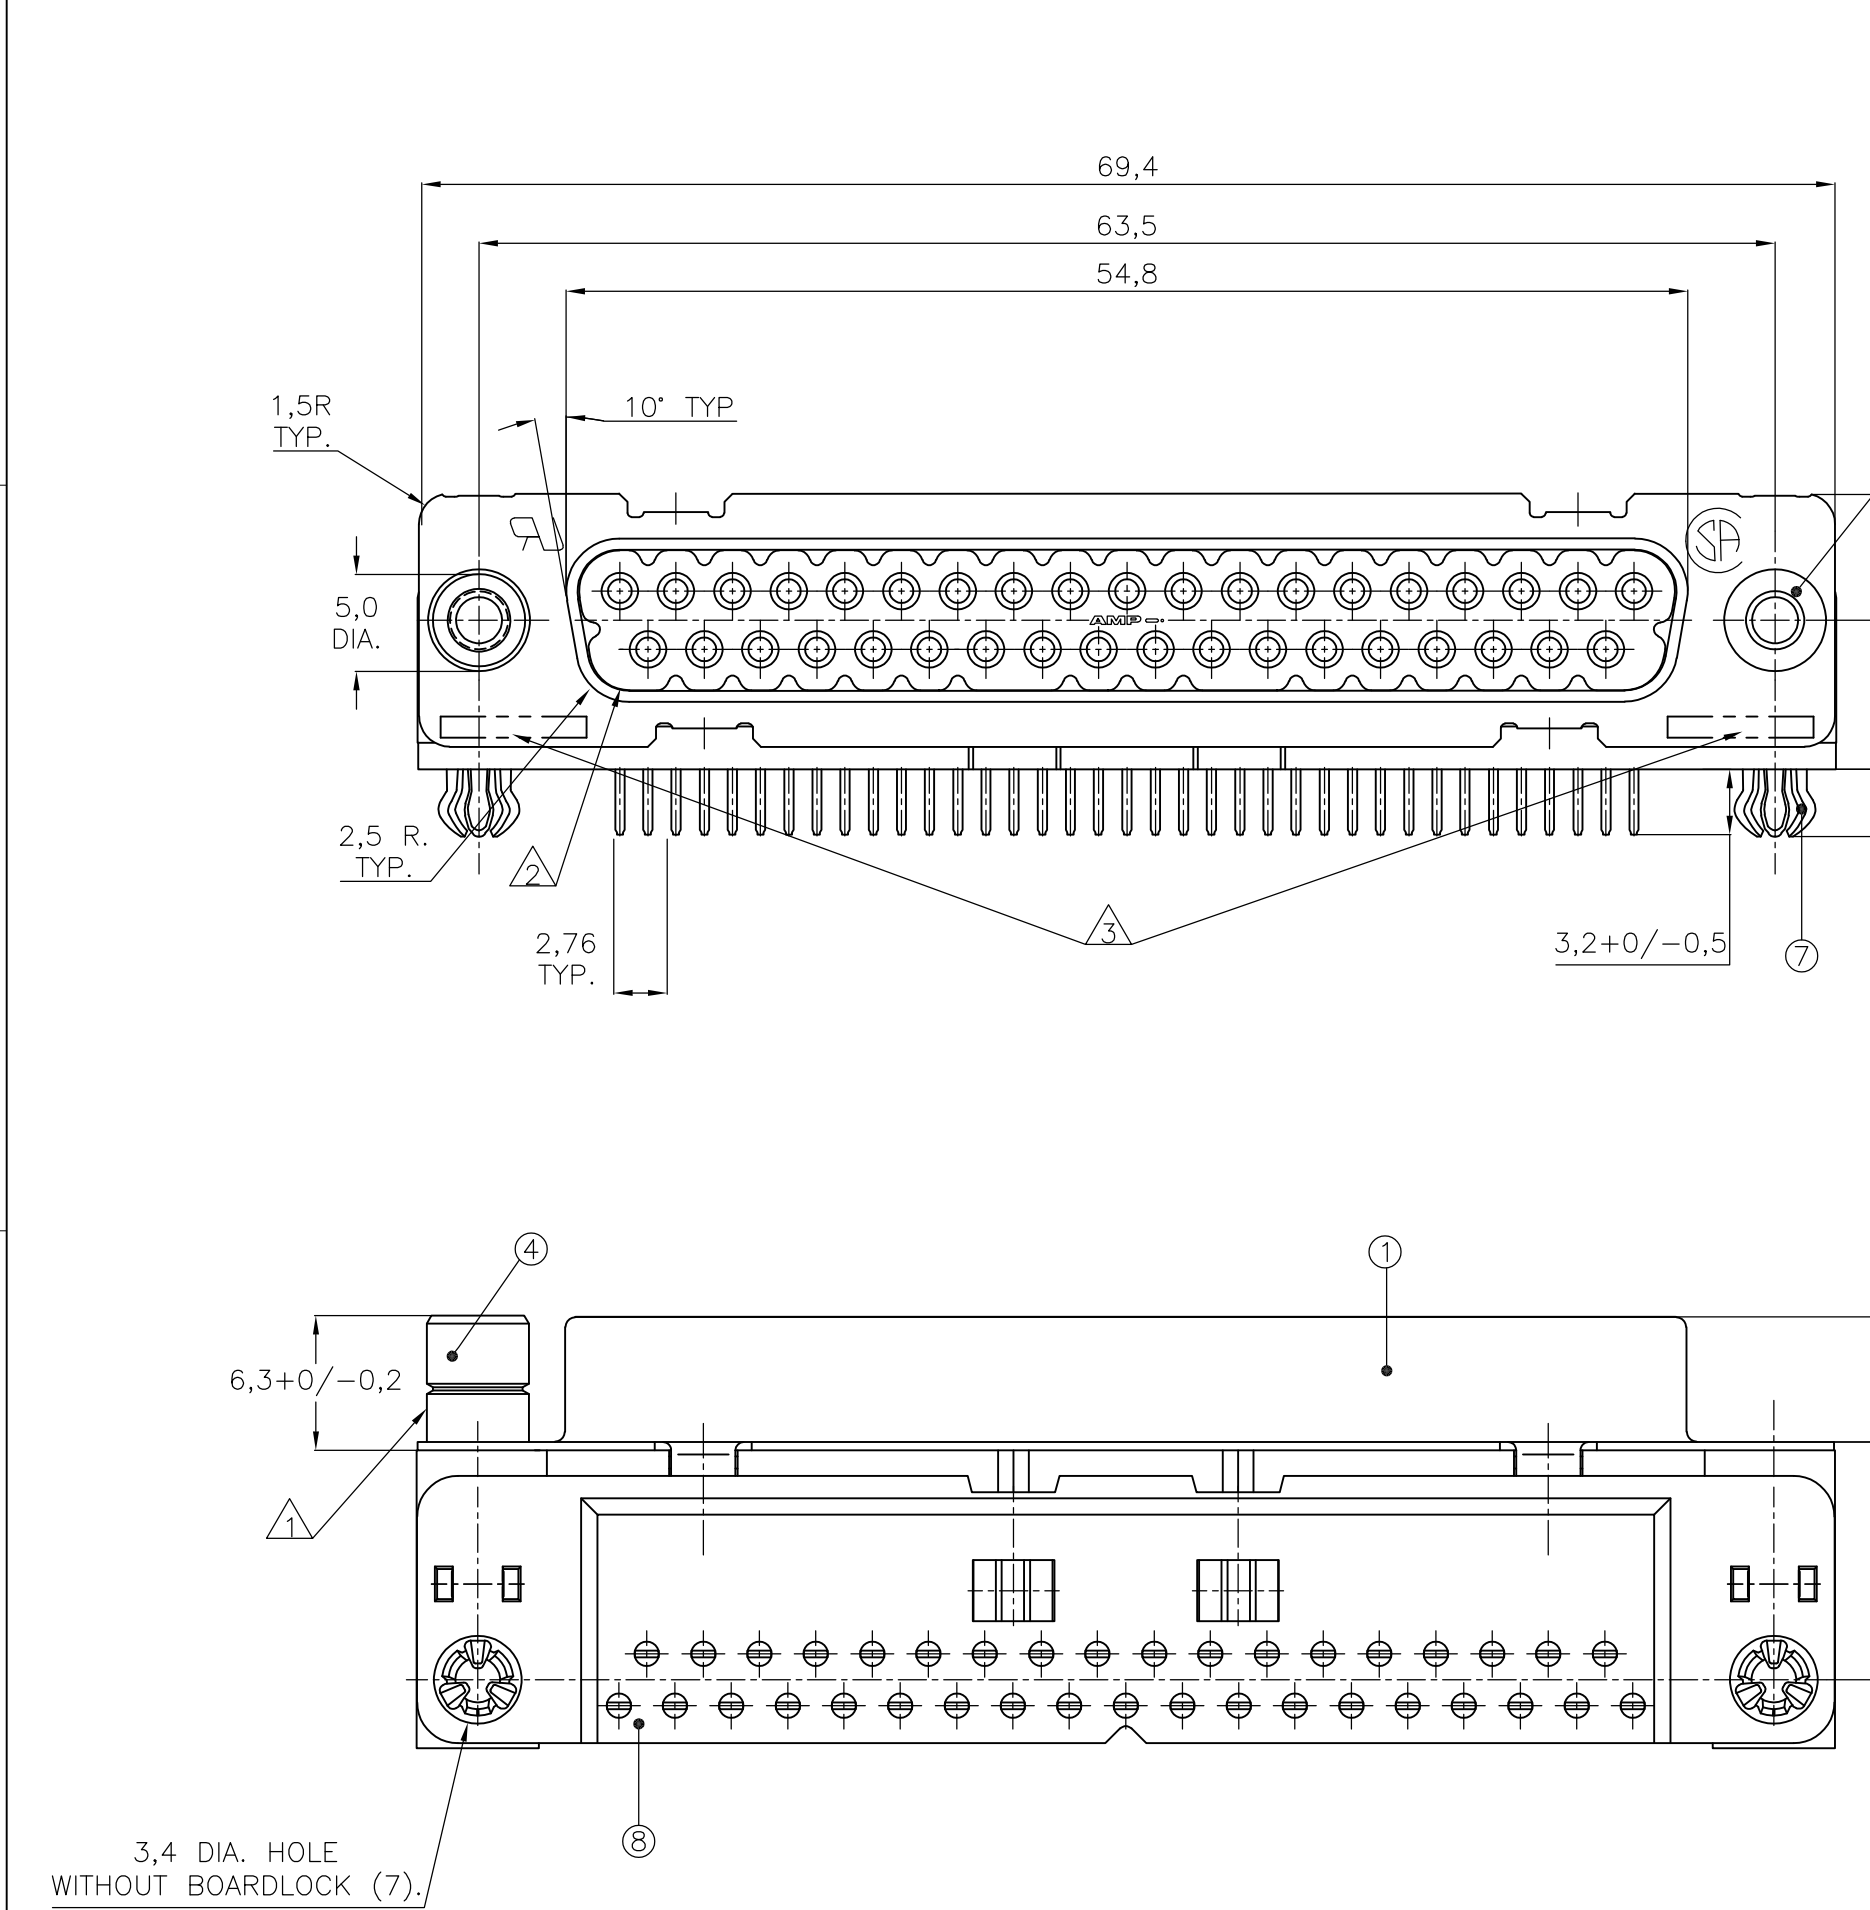

ACCESSORIES
PREFIX "Z"

HOW TO ORDER:

PLATING
SUFFIX "Y"

NOTES :

- 1 GROOVE INDICATES VERSION WITH 4-40 UNC INNER THREAD; WITHOUT GROOVE INDICATES VERSION WITH M3 INNER THREAD.
- 2 CAVITY IDENTIFICATION AT FRONT SIDE ONLY.
- 3 PARTNUMBER AND DATE CODE.
- 4. AIR AND CREEPAGE DISTANCES ACCORDING TO DIN 41652.

ITEM NRS./MATERIAL :

- 1 SHELL : BRIGHT TINPLATED STEEL
- 2 HOUSING : GLASSFILLED POLYESTER, COLOR : BLACK
- 3 CONTACTS : PHOSPHORBRONZE (PLATING : SEE TABLE ABOVE)
- 4 FEMALE SCREWLOCK : TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3)
- 5 BUSHING : TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3 OR 3,1 DIA THRU-HOLE)
- 6 BRACKET : TINPLATED STEEL
- 7 BOARDLOCK : TINPLATED PHOSPHORBRONZE
- 8 POST ALIGNMENTPLATE : GLASSFILLED NYLON. COLOR : BLACK

5	BUSHING WITH THROUGHHOLE 3,1 DIA.	2								2									
5	BUSHING WITH INNER THREAD 4-40 UNC		2								2								
5	BUSHING WITH INNER THREAD M3			2								2							
4	FEMALE SCREWLOCK WITH 4-40 UNC				2									2					
4	FEMALE SCREWLOCK WITH M3					2												2	
7	BOARDLOCK	2	2	2	2	2													

ITEM NO. DESCRIPTION OF ACCESSORY

37 POS.-----> Z-106508-Y

PREFIX FOR ACCESSORIES

BASIC PARTNR.

SUFFIX FOR PLATING

GOLD OVER NICKEL AS PER PERFORMANCE LEVEL 2 (DIN 41652)
SOLDERPART :2,5 μm TIN OVER NICKEL

-Y = -2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. KESSLER	14JAN99	Tyco Electronics Corporation s-HertogenBosch,Nederland,			
DIMENSIONS: MM		CHK W. SOOMERS	—	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	—	HD-20 SIZE 4 RIGHT ANGLE RECEPTACLE HEADER; MARK II+			
MATERIAL		PRODUCT SPEC	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		APPLICATION SPEC	—	A2	00779	C=106508	—
		WEIGHT	—	CUSTOMER DRAWING			
		SCALE	NTS	SHEET	1	OF	1
		REV	K				

106508

B

A