



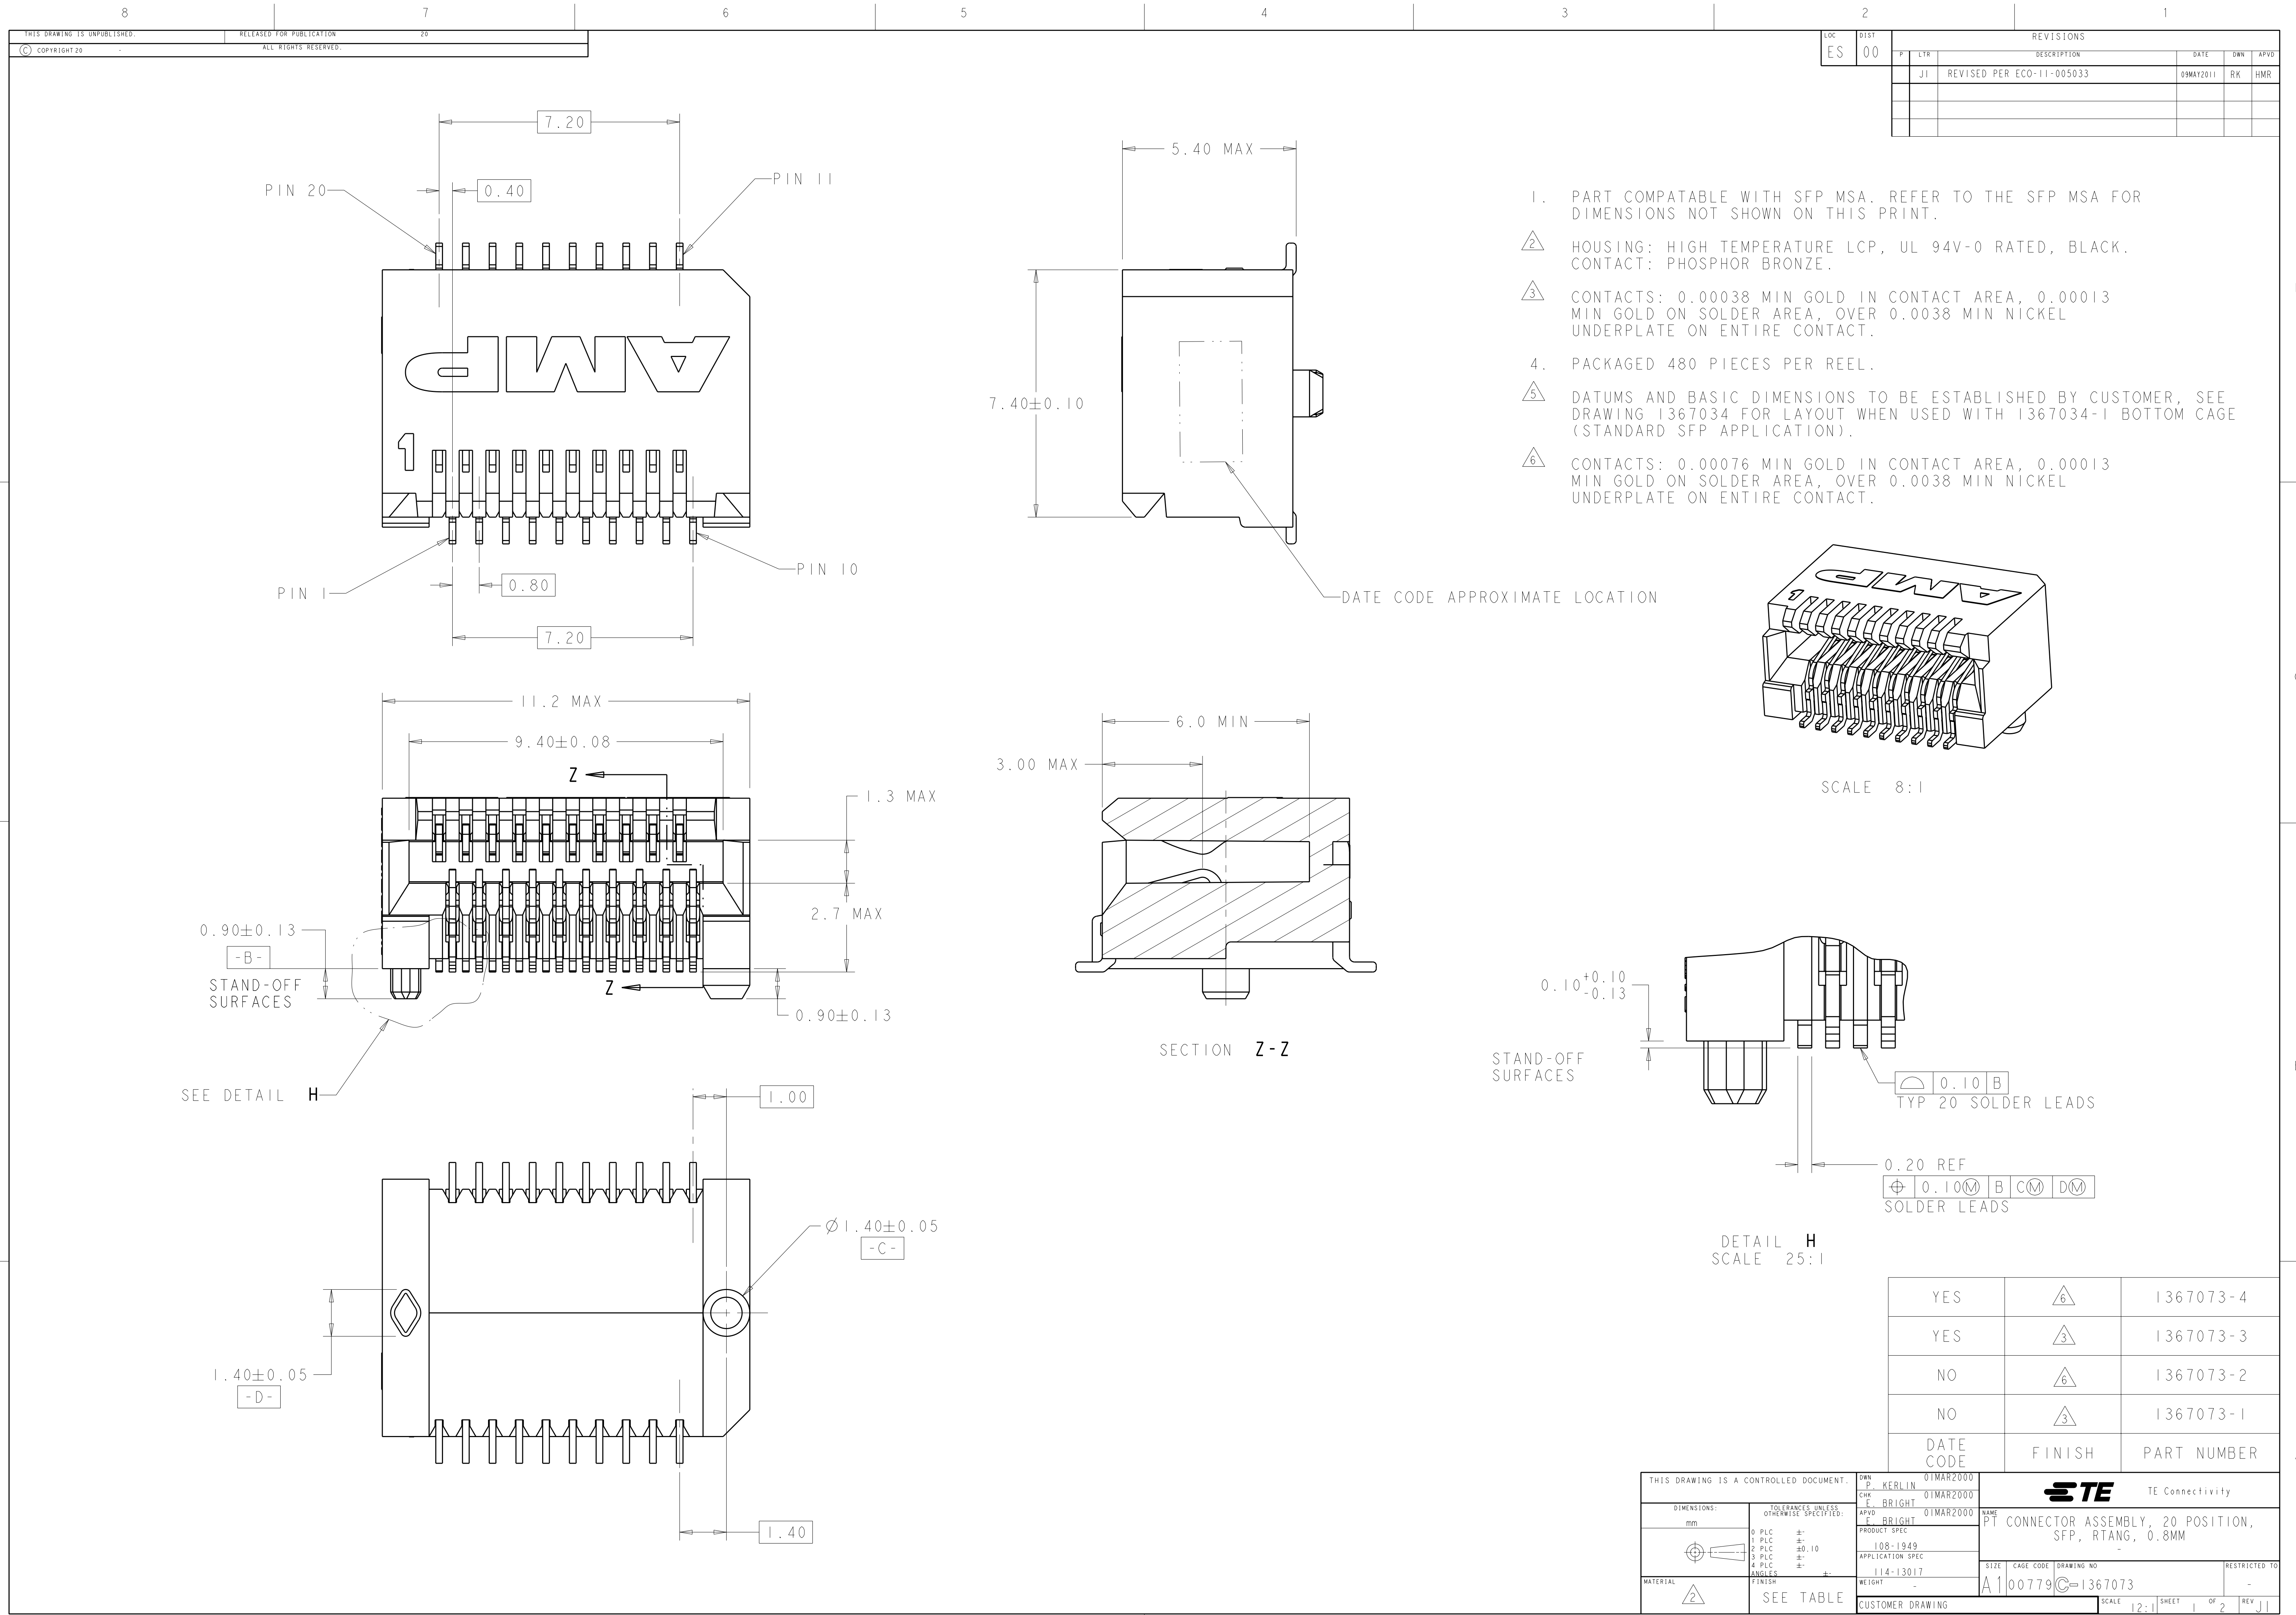


LOC		DIST		REVISIONS			
ES	00	P	LYR	DESCRIPTION	DATE	OWN	APVD
		J1		REVISED PER ECO-11-005033	09MAY2011	RK	HMR

- PART COMPATABLE WITH SFP MSA. REFER TO THE SFP MSA FOR DIMENSIONS NOT SHOWN ON THIS PRINT.
- HOUSING: HIGH TEMPERATURE LCP, UL 94V-0 RATED, BLACK. CONTACT: PHOSPHOR BRONZE.
- CONTACTS: 0.00038 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- PACKAGED 480 PIECES PER REEL.
- DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER, SEE DRAWING 1367034 FOR LAYOUT WHEN USED WITH 1367034-1 BOTTOM CAGE (STANDARD SFP APPLICATION).
- CONTACTS: 0.00076 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

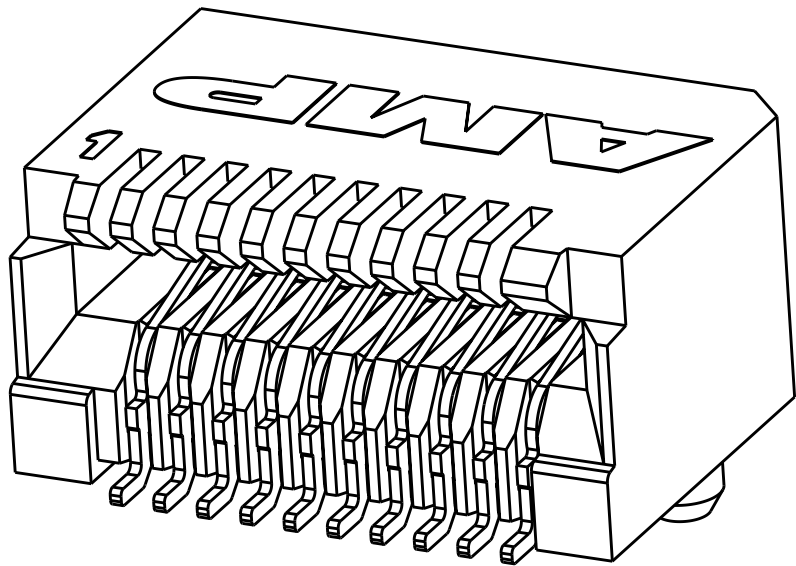

SCALE 8:1

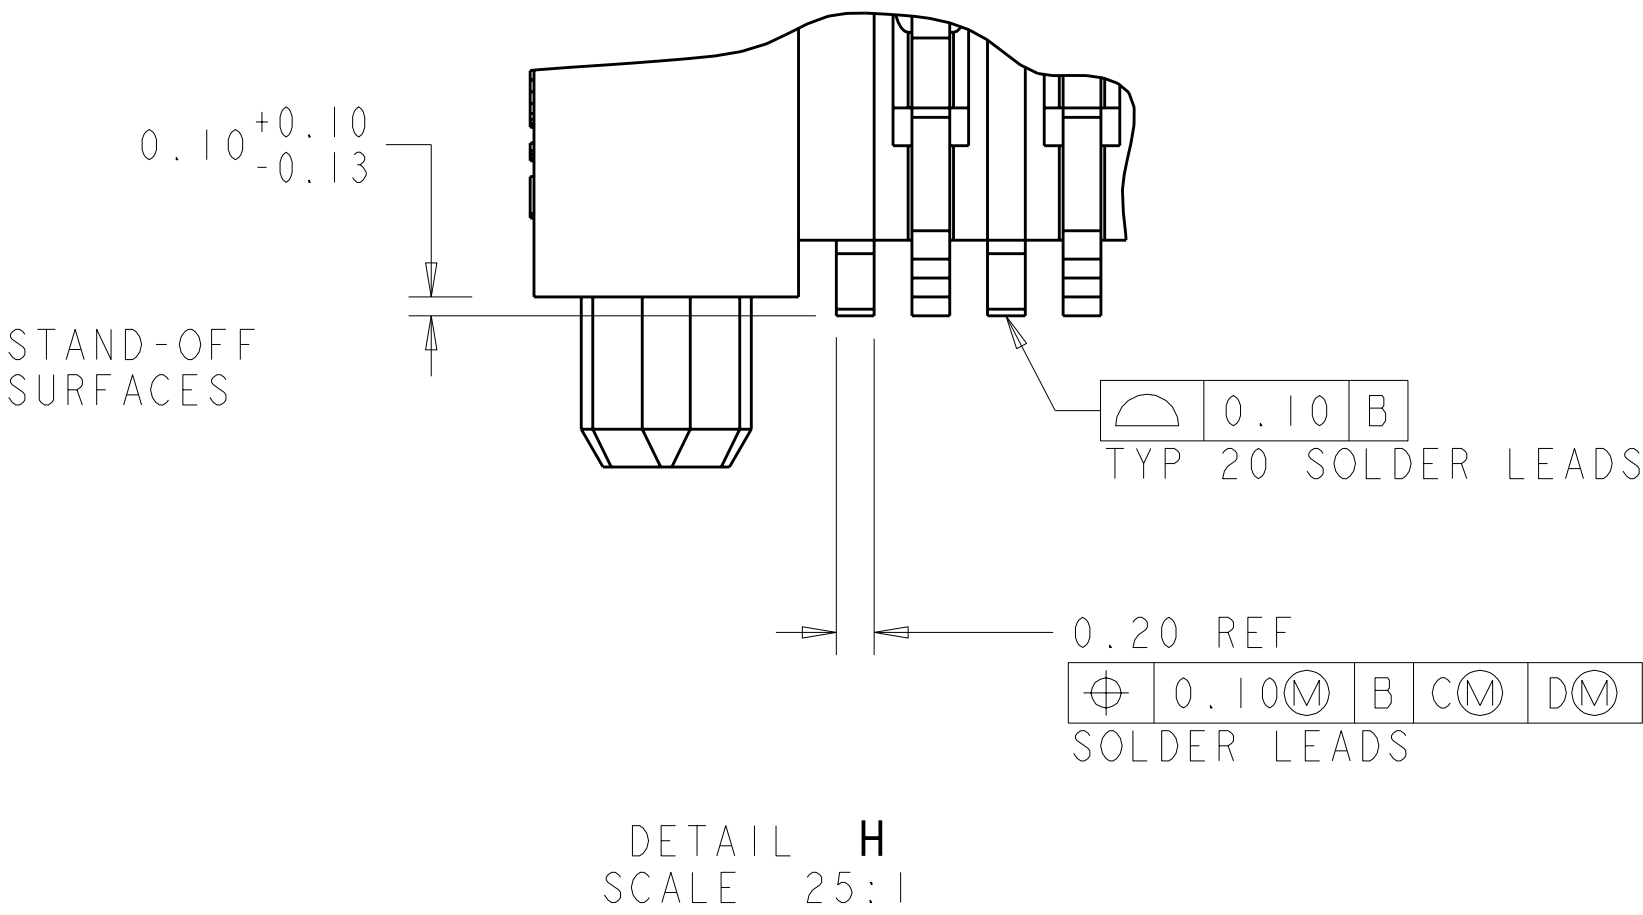

YES	6	1367073-4
YES	3	1367073-3
NO	6	1367073-2
NO	3	1367073-1
DATE CODE	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN P. KERLIN 01MAR2000	TE Connectivity	
DIMENSIONS:		CHK E. BRIGHT 01MAR2000		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD E. BRIGHT 01MAR2000	NAME PT CONNECTOR ASSEMBLY, 20 POSITION, SFP, RTANG, 0.8MM	
mm		PRODUCT SPEC	SIZE	
0 PLC ±		108-1949	CAGE CODE	
1 PLC ±		APPLICATION SPEC	DRAWING NO	
2 PLC ±		114-13017	RESTRICTED TO	
3 PLC ±		WEIGHT	A100779C=1367073	
4 PLC ±		CUSTOMER DRAWING	SCALE 12:1	
ANGLES			SHEET 1 OF 2	
FINISH			REV J1	
SEE TABLE				

