


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



ALL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.

LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	DWN
			K	REVISED PER ECO-05-008694	03NOV05	BM
						APVD
						JL

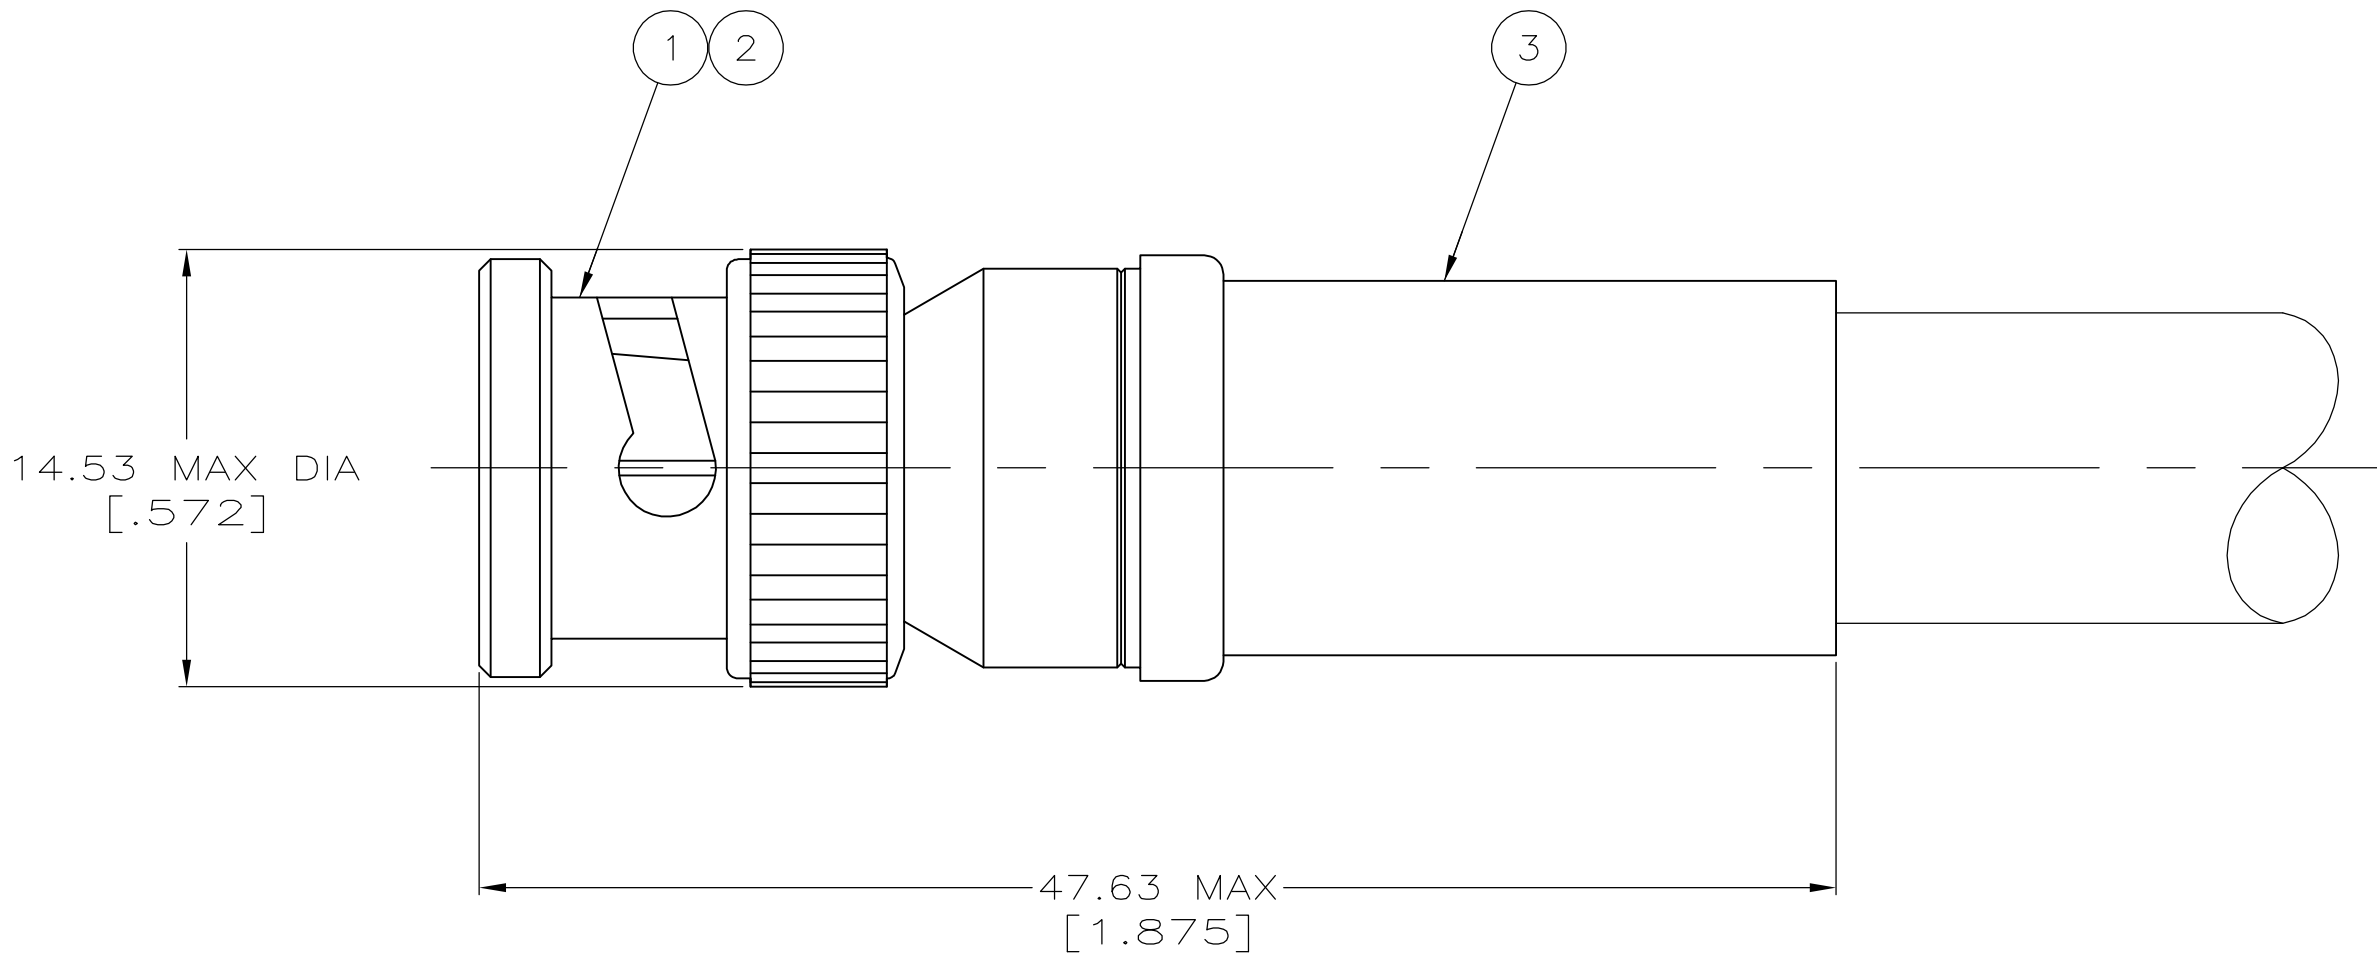

- 1 FOR USE WITH, INTERCOMP RG-11/U TYPE CABLE, .068 DIA CENTER CONDUCTOR, .285 DIA DIELECTRIC, .385 O.D. JACKET, USE STRIP LENGTH A.
- 2 FOR USE WITH, BELDEN 8213 CABLE & THE COAX PORTION OF BELDEN 9232 CABLE, USE STRIP LENGTH B.
3. USE CRIMPING TOOL: 220015-1.
4. SEE I.S. 1914-1
- 5 RG-9/U, RG-9A/U, RG-9B/U, RG-214/U, RG-8/U, RG-8A/U & RG-213/U.

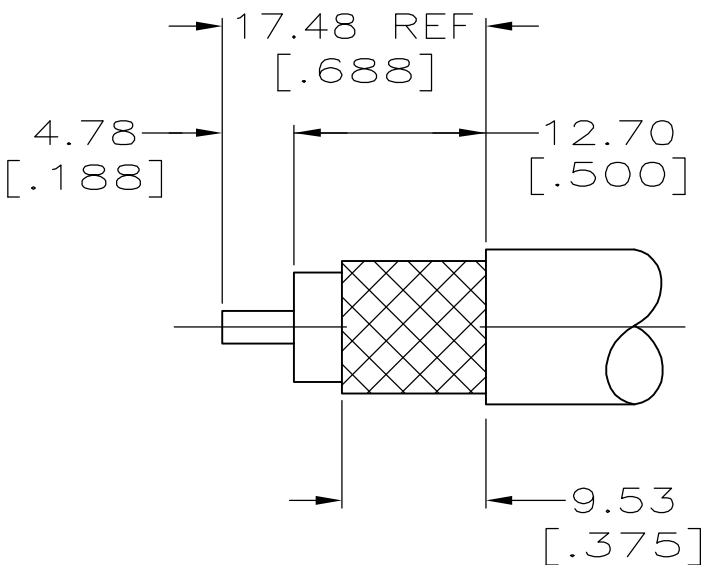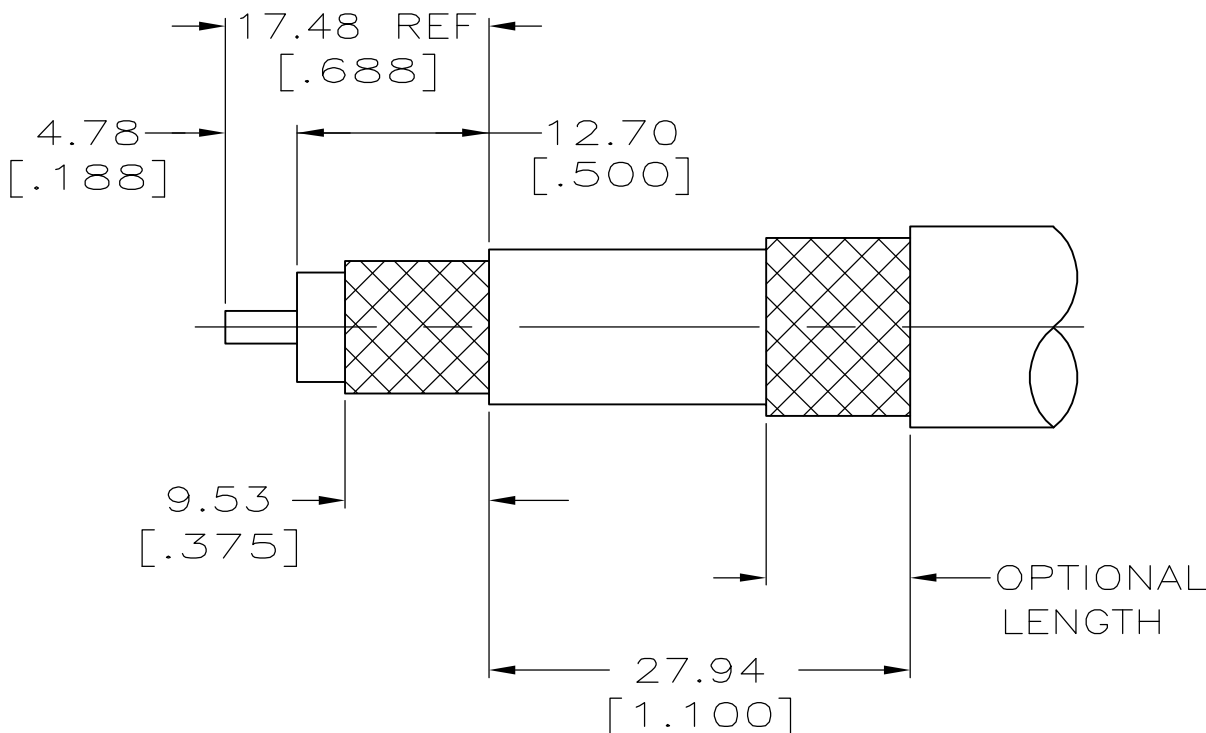

VIEW A
RECOMMENDED STRIP LENGTH
SCALE 2:1
VIEW B

SUPERSEDED BY 225886-4	RG-11/U	B	9-51713-0	225526-4	225887-2	225886-8
	TIMES FM-8	B	9-51713-0	225526-6	225887-2	225886-7
	1 2	A OR B, SEE CABLE	9-51713-0	225596-4	225887-2	225886-6
OBSOLETE	ALPHA 9847	B	51713-2	225596-4	225887-3	225886-5
	RG-11/U	B	51713-2	225526-4	225887-1	225886-4
SUPERSEDED BY 225886-1	RG-9/U,9A/U,9B/U &214/U	B	51713-2	225596-2	225887-1	225886-2
	5	B	51713-2	225596-2	225887-1	225886-1
FOR USE WITH CABLE:		VIEW	3 FERRULE QTY=1	2 CONTACT QTY=1	1 PLUG ASSY QTY=1	PART NUMBER