





(AS SHOWN : -6)

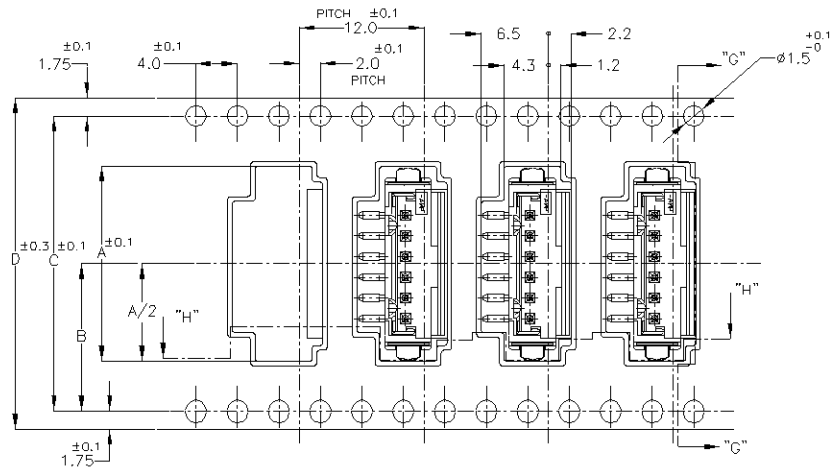

SECT "G"- "G"

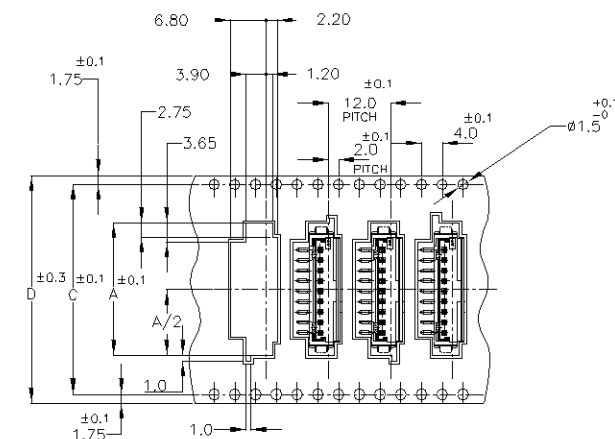

9P ONLY



SECT "H"- "H"

TOP OF REEL

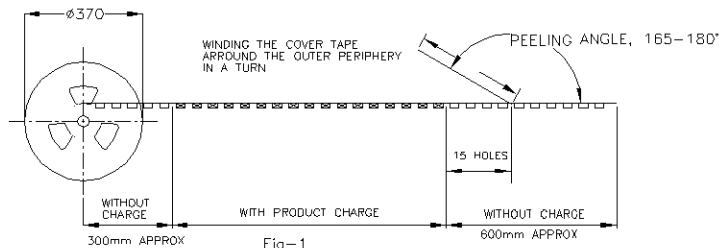


Fig-1

NOTES:

- PEELING RESISTANCE: 0.196N(20gf)-0.686N(70gf)
SPEED: 300mm/min


TOLERANCE UNLESS OTHERWISE SPECIFIED
10>* ±0.2
30>*10 ±0.25
100>*30 ±0.3
ANGLE ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	±

DWN J.JIANG 23JAN03	CHK S.YAO 23JAN03	APVD T.SAKAKI 23JAN03
PRODUCT SPEC		
108-60016		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		


tyco Electronics		Tyco Electronics Corporation Shanghai, P.R.China,200233	
ON TAPING (EMBOSS)		AMP CT CONNECTOR POST HEADER ASS'Y (BOX-V SMT W/O BOSS & W/TAI)	
SIZE A3	CAGE CODE 00779	DRAWING NO C=292175	RESTRICTED TO -
SCALE 1:1		SHEET 1 OF 2	REV B

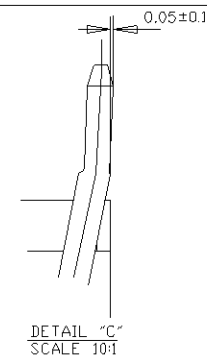

2. MATERIAL:HSG-6T PA(G.F.30%)(UL94V-0)
COLOR:NATURAL,BLACK
POST:TIN BRASS
TAIL: TIN BRASS


4 TO BE MEASURED WITH CONNECTOR PLACED

ON HORIZONTAL DATUM SURFACE,FLOAT OF
SOLDER TINE AND TAIL FROM DATUM
SURFACE IS 0.1mm MAX

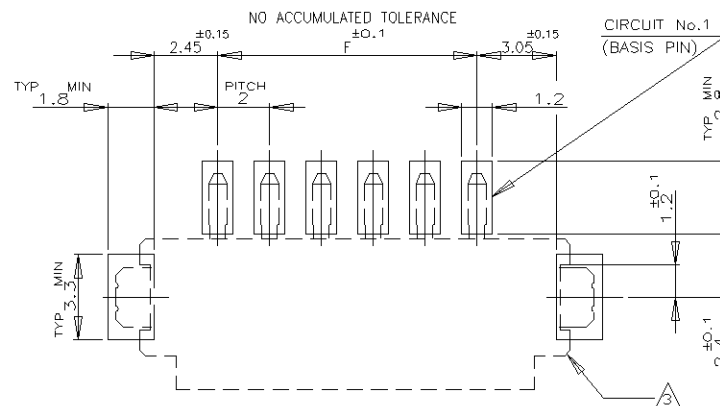


RECOMENDED P.C.BOARD LAYOUT
(P.C.B THK:0.8mm MIN)

	16.0	19.8	9	2-292175-9	292175-9
	14.0	17.8	8	2-  -8	 -8
	12.0	15.8	7	2-  -7	 -7
	10.0	13.8	6	2-  -6	 -6
	8.0	11.8	5	2-  -5	 -5
	6.0	9.8	4	2-  -4	 -4
	4.0	7.8	3	2-  -3	 -3
	2.0	5.8	2	2-292175-2	292175-2
	F	E	POS.	BLACK	NATURAL
				P/N	



TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0	PLC	$\pm$	-
1	PLC	$\pm$	-
2	PLC	$\pm$	-
3	PLC	$\pm$	-
4	PLC	$\pm$	-
ANGLES		$\pm$	-

SEE NOTE

31 JAN 03

APV

—
PRODUCT SPEC

108-60

APPLICATION SPEC

CUSTOMER DRAWING

31 JAN 03

16

tyco
Electronics

Tyco Electronics Corporation
Shanghai, P.R.China,200233

ON TAPING (EMBOSS)
SMT TYPE POST HDR ASS*Y(V)
W/O BOSS &WITH TAIL TYPE

SIZE	CAGE CODE	DRAWING NO
A3	00779	C-292175

RESTRICTED TO

SCALE	5:1
-------	-----

SHEET 2 OF 2

REV	B
-----	---