


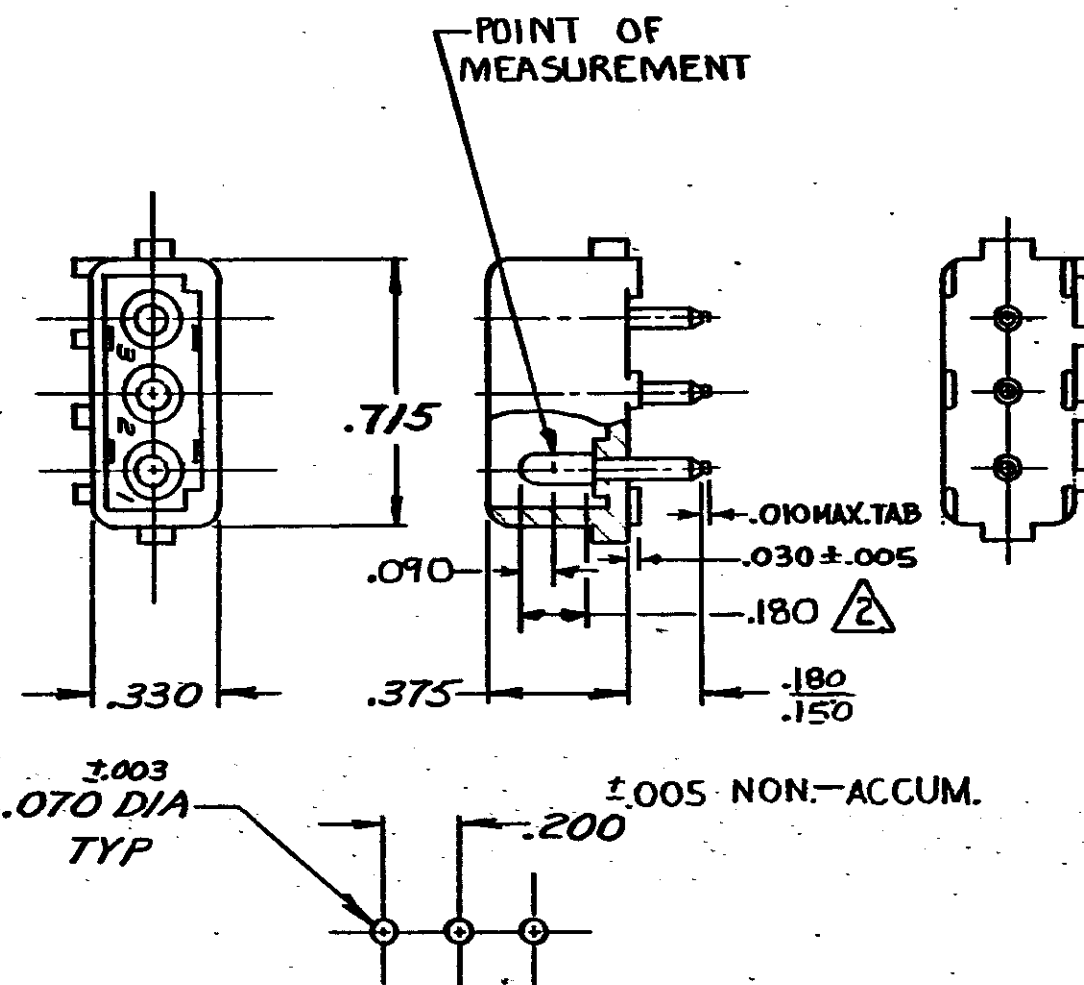

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

1. PARTS COMPLY WITH AMP SOLDERABILITY

SPEC. NO. 109-11-3

2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN
.000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE
TIN ON SOLDER TAIL END.

350210-2	NYLON NATURAL	COPPER ALLOY - GOLD	2	
350210-1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN		
ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH		
© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY		
DR 9. Edman 4-12-73	MATERIAL AND FINISH SEE TABLE		AMP INCORPORATED HARRISBURG, PENNA.	
CHK Em Polton 4/12/73	WIRE - RANGE - INSULATION H - H			
DE Thurber 4-13-73	TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'			
APP Thurber 4-13-73	SCALE H			
NAME 3 CIRCUIT MATE-N-LOK P.C. BOARD HEADER		LOC CM B	NO 350210	REV T

Unpublished copy not to be reproduced nor published
without written permission of AMP Incorporated

REVISION RECORD		DR	CHK	DATE
T	OBsolete 1-- 2--1 PER FCN CM-2706	NG	RS	8-1-73
S	08S 9-1 PER CM 2213	RS	RS	3-2-73

REQUIRED PER ASSEMBLY	
DESCRIPTION	