

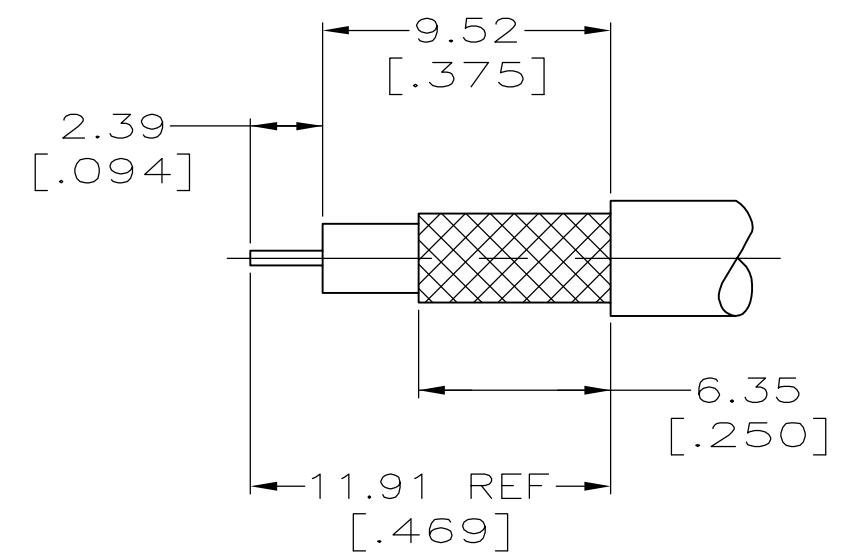


1. USE PRO-CRIMPER II: 354940-1
2. USE INSTRUCTION SHEET 9766
3. SPECIAL PACKAGING: BULK PACKAGE 25 PIECES
4. SPECIAL PACKAGING: BULK PACKAGE 100 PIECES

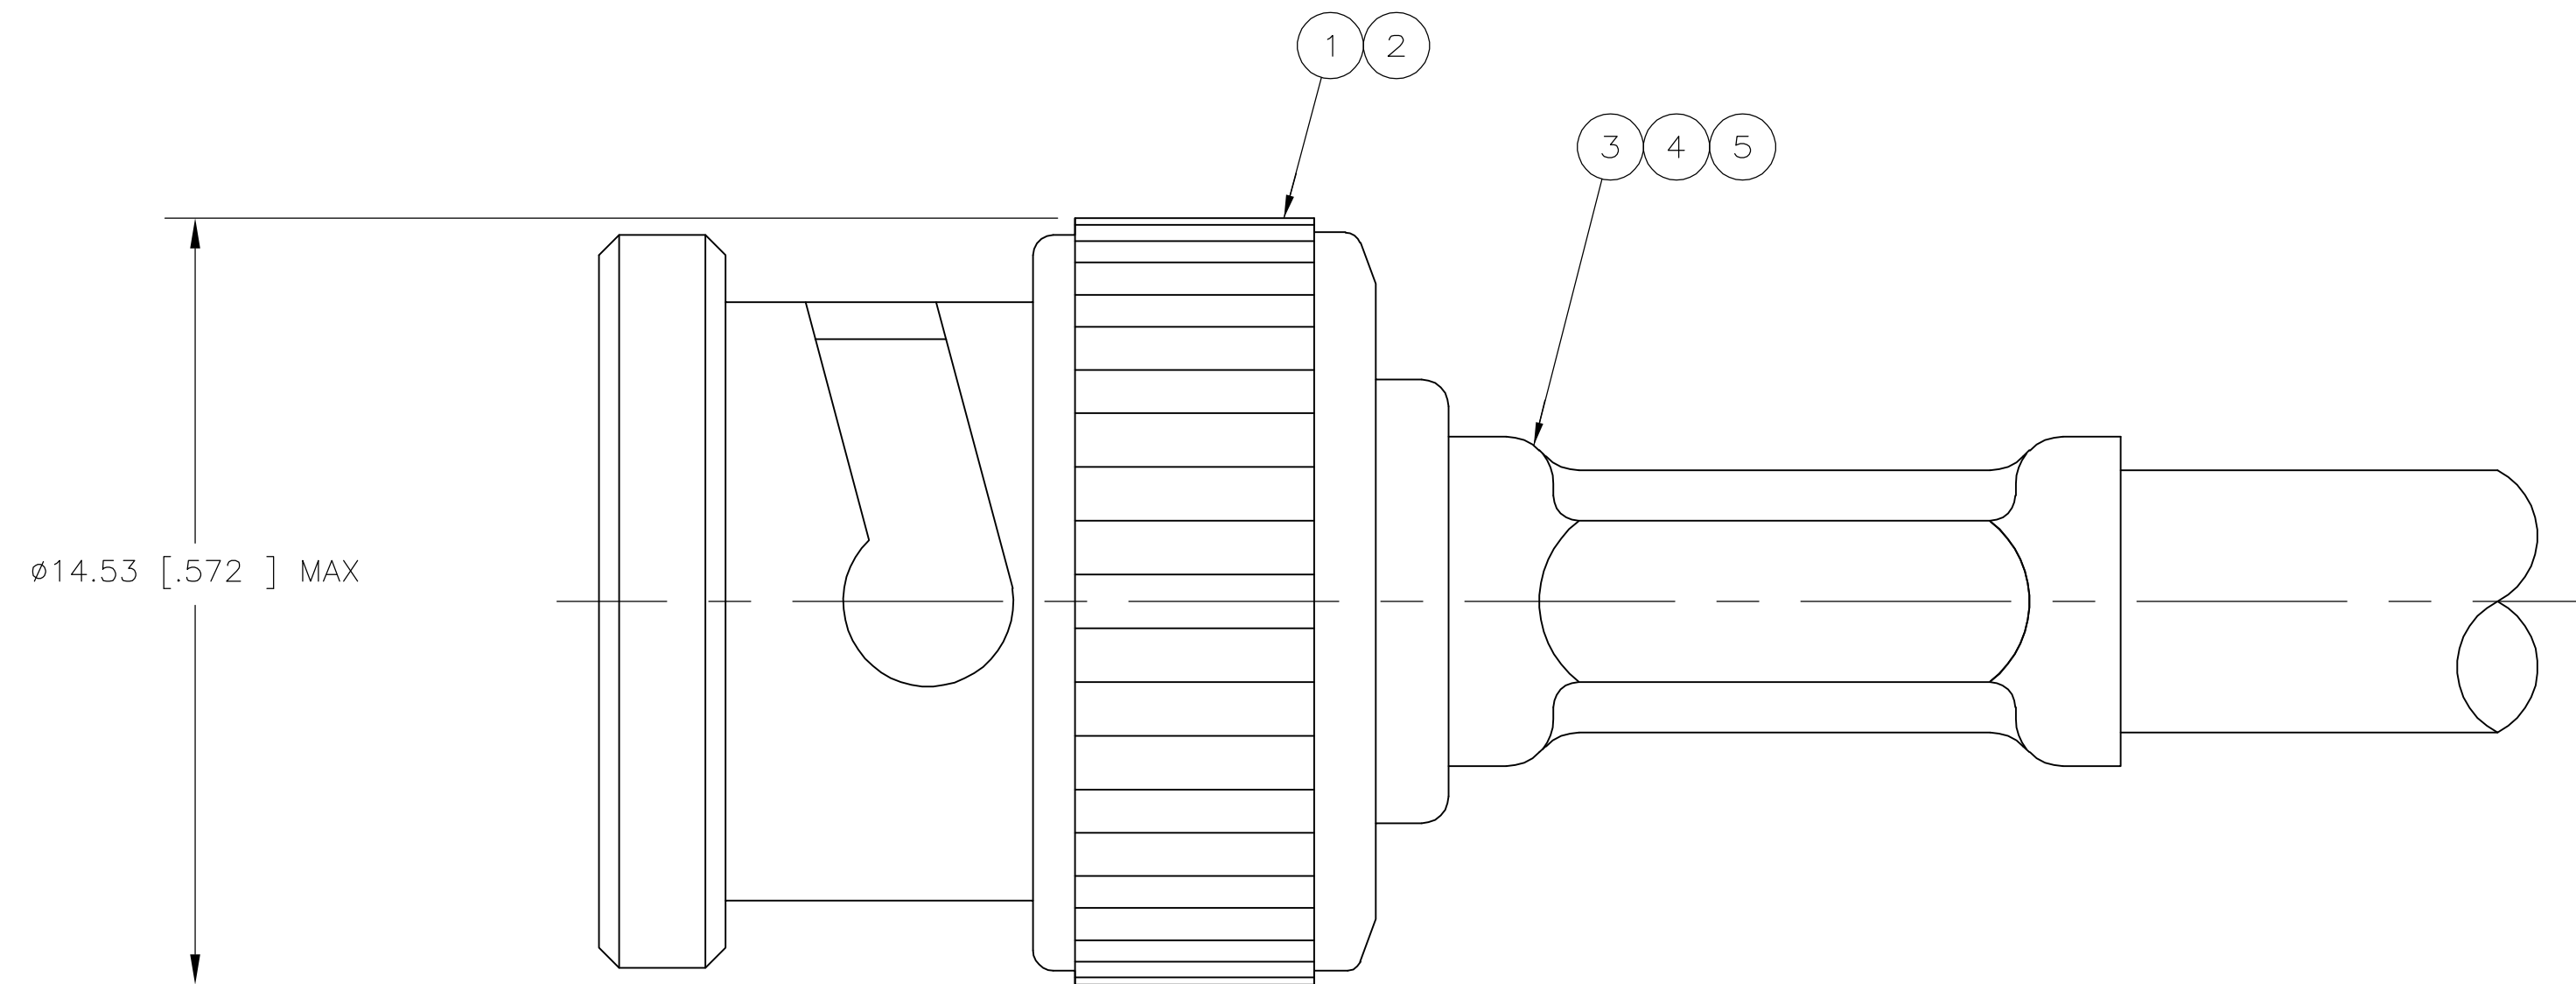


RECOMMENDED STRIP LENGTH
SCALE 4:1

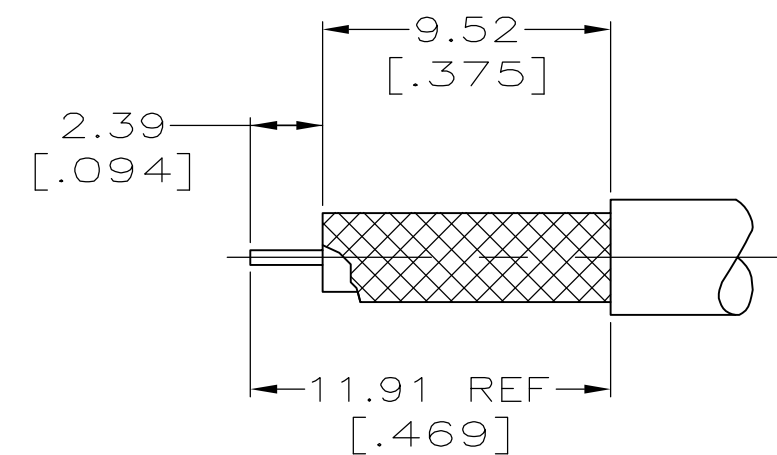

RECOMMENDED STRIP LENGTH
SCALE 4:1

(FOR 413589-5 AND 1-413589-2 ONLY)

OBSOLETE	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	9-413589-6
	JIS 3C-2V	1.07	.042	5.41	.213	852922-1	-	-	9-221132-4	1-413657-0	413653-5	9-413589-5
	RC-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-8	413653-1	9-413589-4
OBSOLETE	RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	9-413589-3
OBSOLETE	AT&T 734A	1.07	.042	6.48	.255	852922-1	-	-	9-221132-3	413657-8	413653-4	9-413589-2
OBSOLETE	BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	9-413589-1
OBSOLETE	RG-59/U, 59A/U & 59B/U	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-2	413653-1	9-413589-0
4	OBSOLETE CUSTOM CABLE: C/C=Ø.021, DIELECTRIC=Ø.122, JACKET=Ø.173	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	1-413657-0	413653-5	2-413589-1
OBSOLETE	MONTROSE 8466-3 AND 8299-3	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	1-413657-2	413653-5	1-413589-8
4	OBSOLETE BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-7
	BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-6
OBSOLETE	JIS 2.5C-2W	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	413657-4	413653-2	1-413589-5
OBSOLETE	JIS 3C-2W	1.07	.042	6.48	.255	852922-1	-	-	9-221132-9	1-413657-0	413653-6	1-413589-4
OBSOLETE	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	1-413589-3
OBSOLETE	BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-8	413653-3	1-413589-2
	JIS 3C-2V	1.07	.042	5.41	.213	852922-1	-	-	9-221132-4	1-413657-0	413653-5	1-413589-1
	AT&T 735A C/C=Ø.016, DIELECTRIC=Ø.077, JACKET=Ø.130	1.07	.042	4.52	.178	852922-2	-	-	9-413658-2	413657-4	413653-2	1-413589-0
	RC-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-8	413653-1	413589-9
	RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	413589-8
	AT&T 734A	1.07	.042	6.48	.255	852922-1	-	-	9-221132-3	413657-8	413653-4	413589-7
	TIMES RG-59/U, DOUBLE BRAID, .270 OD JACKET	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-2	413653-1	413589-6
	BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-8	413653-3	413589-5
OBSOLETE	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	413589-4
	BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	413589-3
	RG-59/U, 59A/U & 59B/U	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-2	413653-1	413589-2
OBSOLETE	BELDEN 88241	1.07	.042	6.48	.255	852922-1	-	-	9-413658-3	413657-2	413653-1	413589-1
	FOR USE WITH CABLE	CONTACT CRIMP (SQUARE)	FERRULE CRIMP (HEX)	DIE SET 1	5 TUBING, PLASTIC QTY=1	4 TUBING QTY=1	3 FERRULE QTY=1	2 CONTACT QTY=1	1 PLUG ASSY QTY=1	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 4-27-90 D. LAMAN		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0.1 PLC ± . 1.0 PLC ± . 0.010 PLC ± . 0.100 PLC ± . 0.001 ANGLES ± .		0.1 PLC ± . 1.0 PLC ± . 0.010 PLC ± . 0.100 PLC ± . 0.001 ANGLES ± .		PLUG, 75 OHM, HEX CRIMP, BNC	
		PRODUCT SPEC		SIZE GAGE CODE DRAWING NO	
MATERIAL		APPLICATION SPEC		RESTRICTED TO	
-		-		A1 00779 C 413589	
CUSTOMER DRAWING		SCALE 8:1		SHEET 1 OF 1 REV Y2	