


LOC	DIST			REVISIONS				
AF	50	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
					U	REL PER 063A-0635-02	180CT02	JR/JH

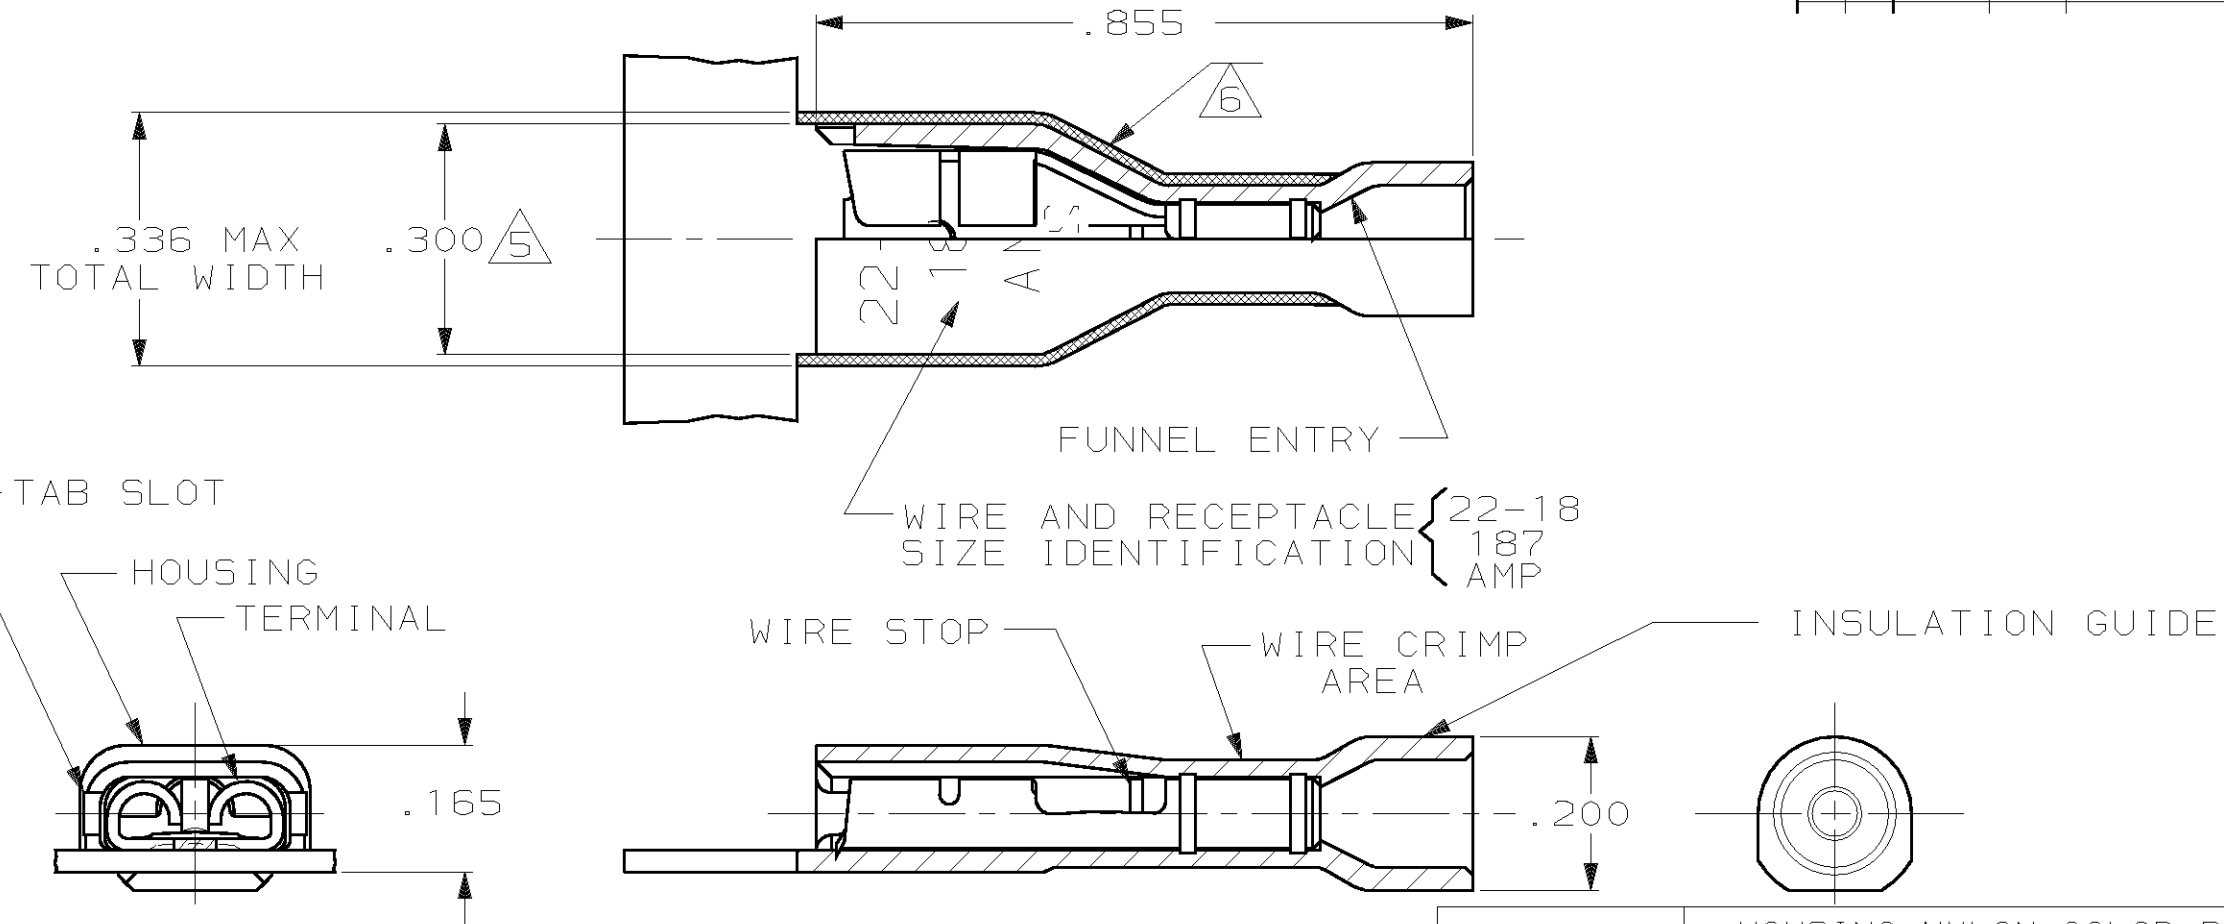

- 1 MATES WITH .020±.001×.187 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE
IS ALLOWABLE IN THE SHADED AREA

STANDARD	HOUSING: NYLON, COLOR-BLACK RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		9-520181-2	
BULK	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		5-520181-2	
STANDARD	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD PHOS BRONZE TIN PL .000080 MIN THK		2-520181-4	
	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		2-520181-2	
PACKAGING	MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -		DR 10/7/88 P FORTNEY	 AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL		CHK 10/10/88 MS FEHER		
SEE TABLE		APPD 10/10/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST, .187 SERIES, 22-18 AWG	
		APPD 10/10/88 TL SHUTTER		
FINISH		PRODUCT SPEC 108-2043	SIZE B	FSCM NO 00779
SEE TABLE		APPLICATION SPEC 114-2123	DRAWING NO 520181	
		WEIGHT -	SCALE 4:1	SHEET 1 OF 1