


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				J	REV PER 0G1A-0148-99	4JUN99	JR_ JH

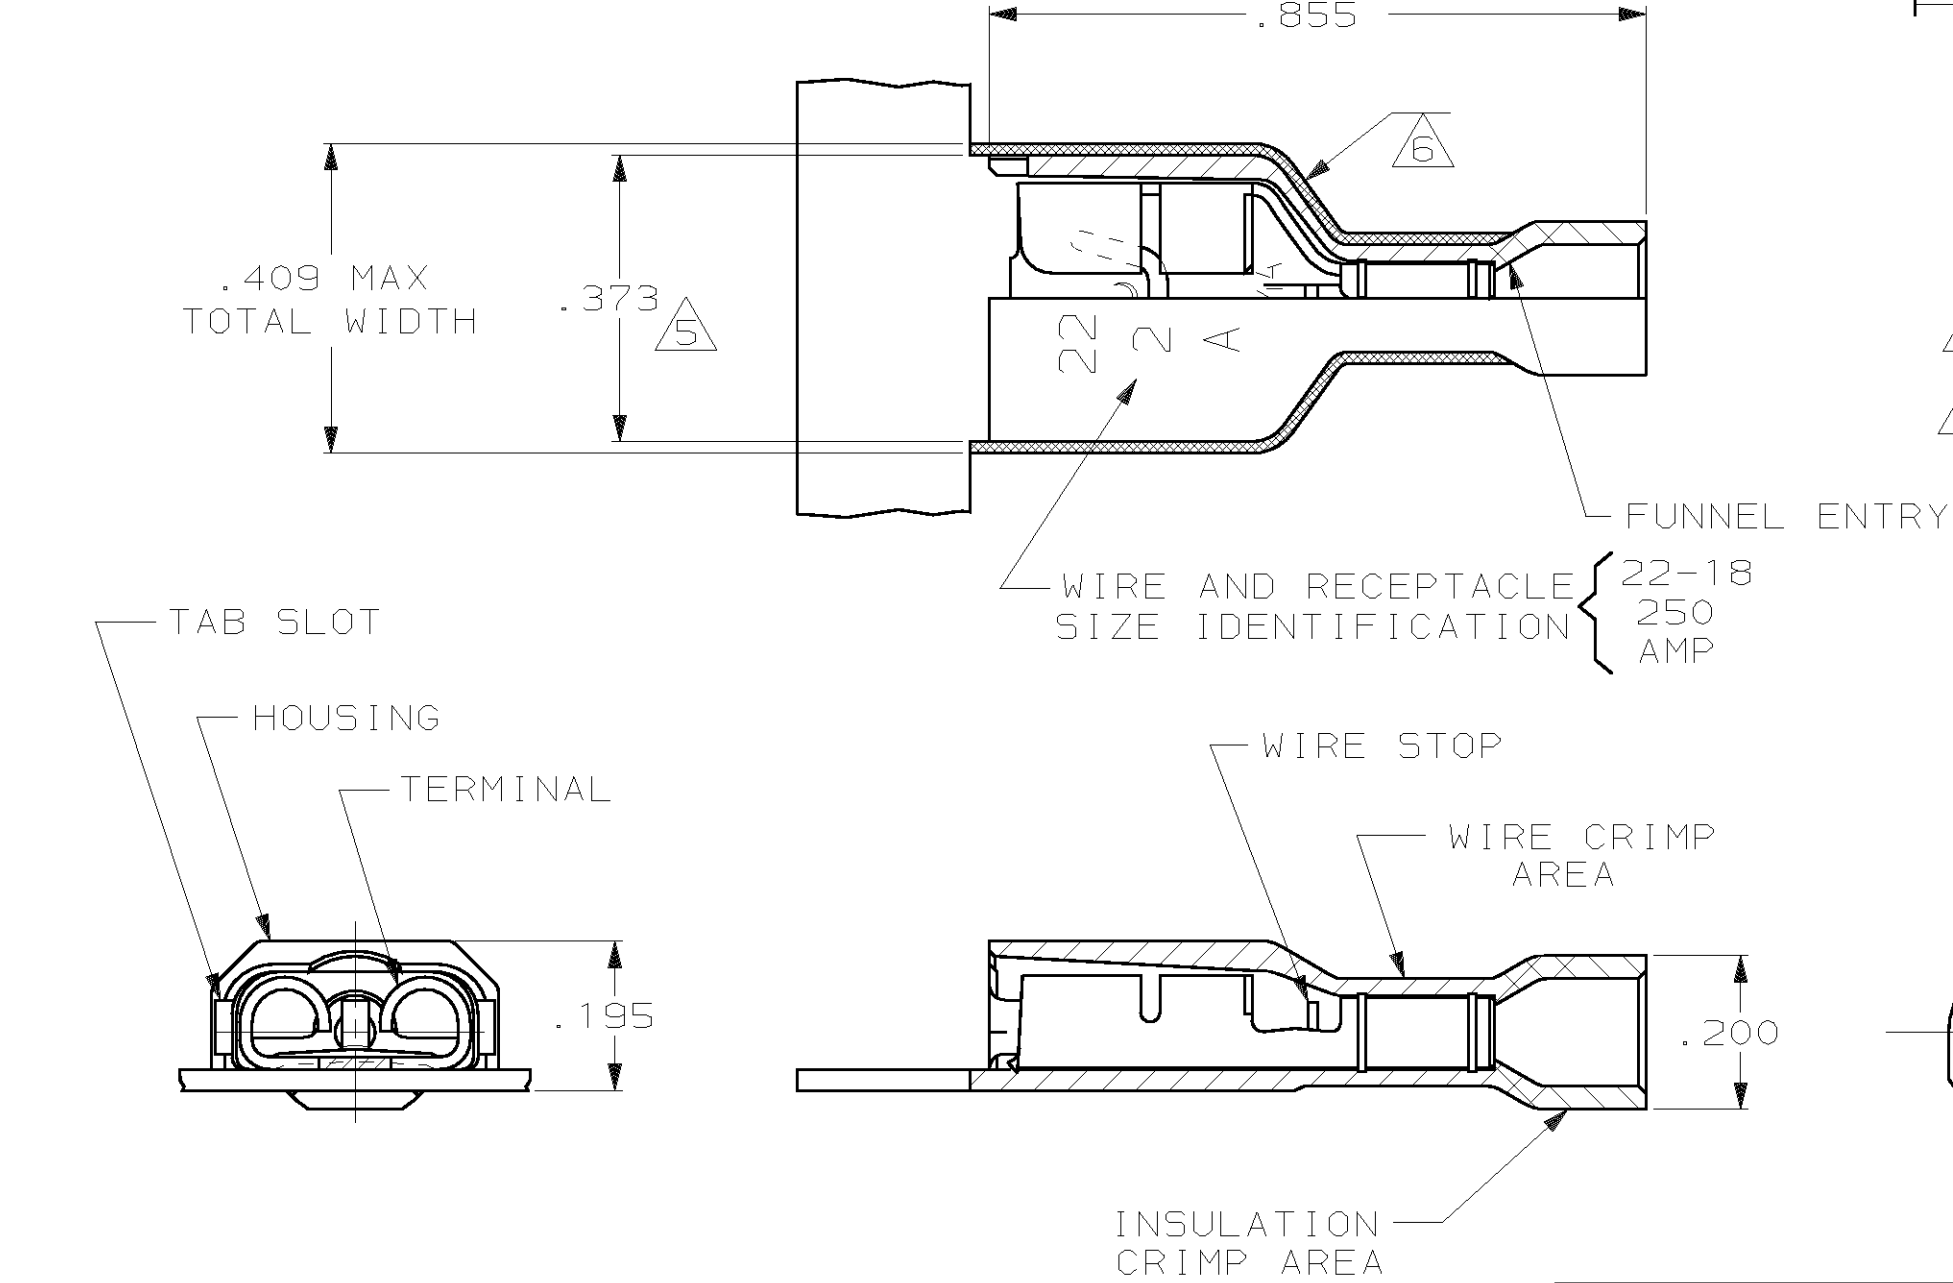

- 1 MATES WITH .032±.001×.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .060-.135 DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN .000080 MIN		2-520405-2	
MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± - MATERIAL SEE TABLE FINISH SEE TABLE	DR 10/26/88 P FORTNEY	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 11/3/88 MS FEHER		
	APPD 11/4/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST PLUS, .250 SERIES, 22-18 AWG	
	APPD 11/14/88 TL SHUTTER		
PRODUCT SPEC 108-2044		SIZE B	FSCM NO 00779
APPLICATION SPEC 114-2123		DRAWING NO 520405	
WEIGHT -		SCALE 4:1	SHEET 1 OF 1