


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				J	REV PER 0G1A-0148-99	4JUN99	JR JH

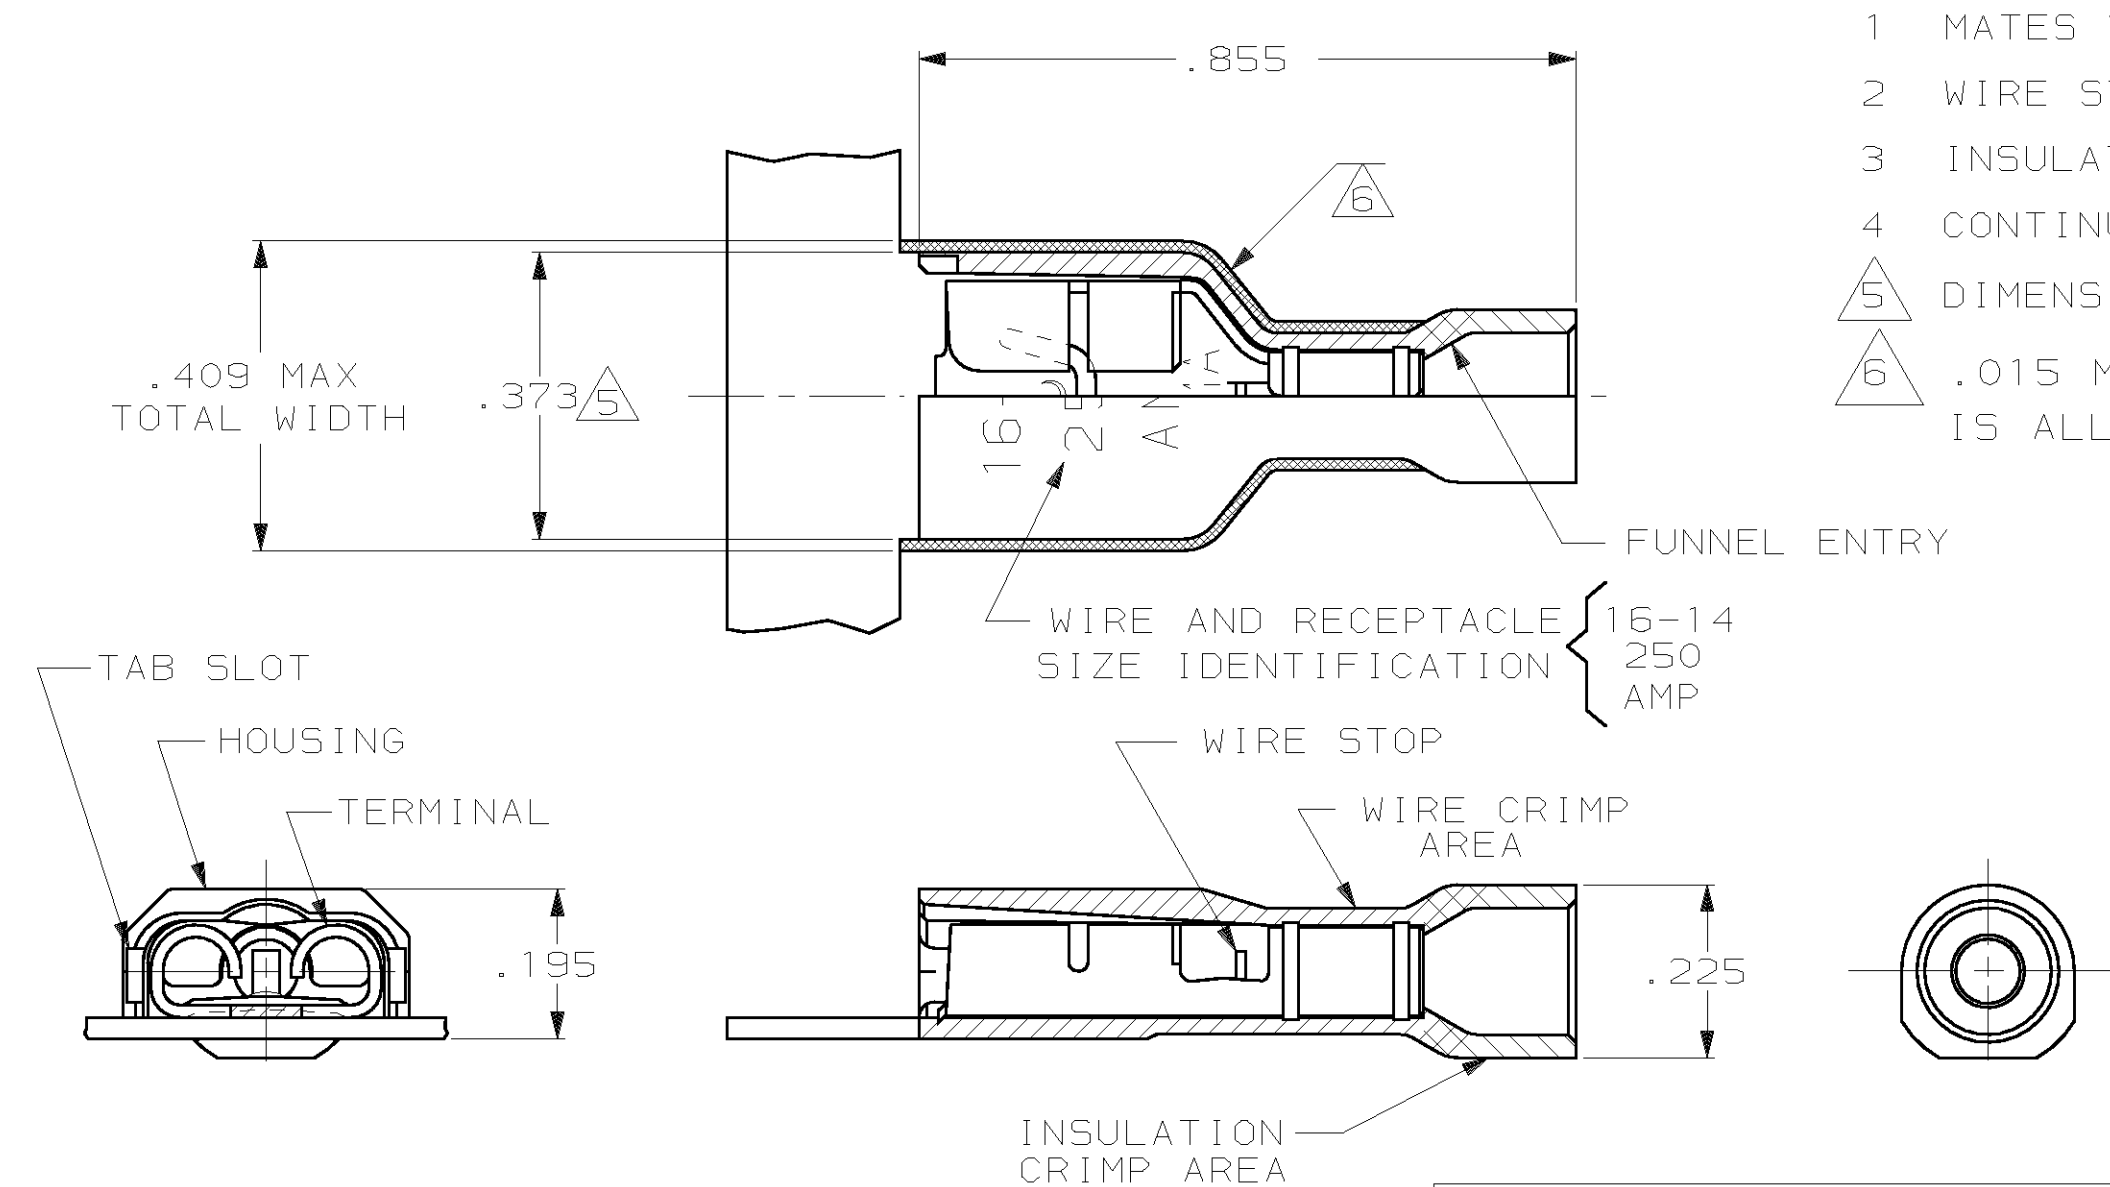

- 1 MATES WITH .032±.001×.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .090-.160 DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		3-520406-2	
MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± - MATERIAL SEE TABLE FINISH SEE TABLE	DR 10/27/88 P FORTNEY	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 11/3/88 MS FEHER		
	APPD 11/14/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST PLUS, .250 SERIES, 16-14 AWG	
	APPD 11/14/88 TL SHUTTER		
	PRODUCT SPEC 108-2044	SIZE B	FSCM NO 00779
	APPLICATION SPEC 114-2123	DRAWING NO 520406	
	WEIGHT -	SCALE 4:1	SHEET 1 OF 1