


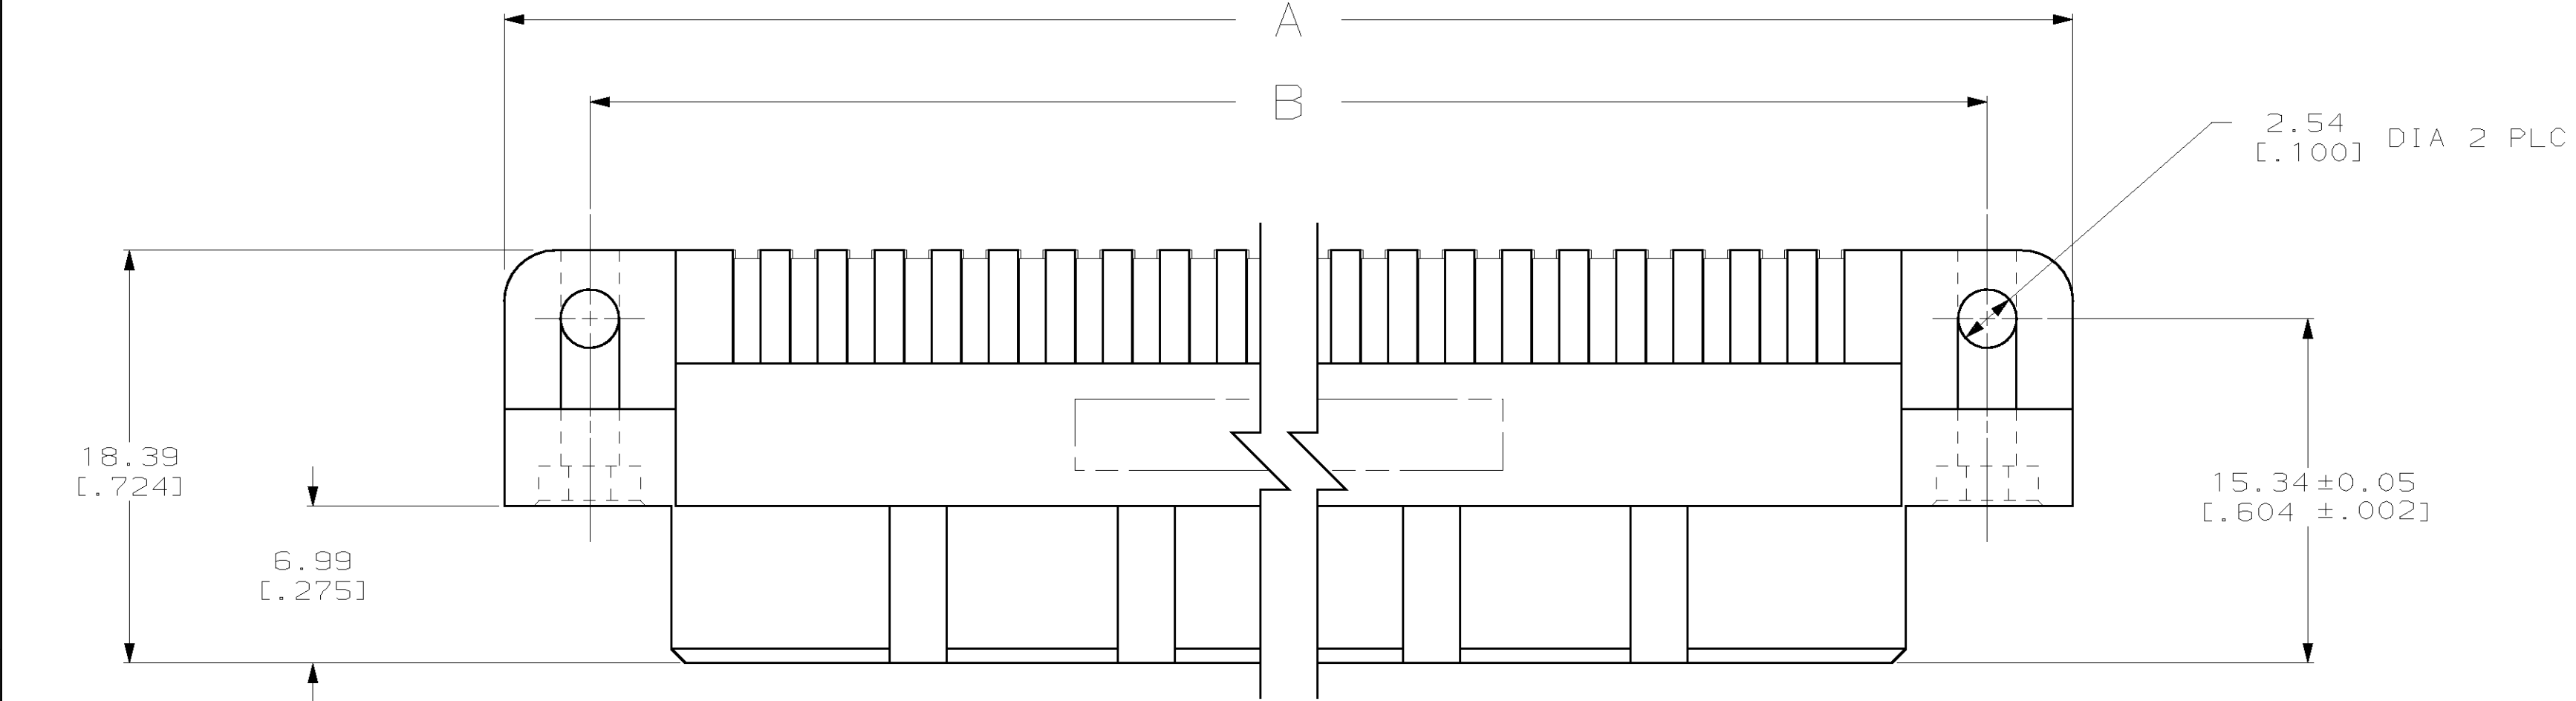
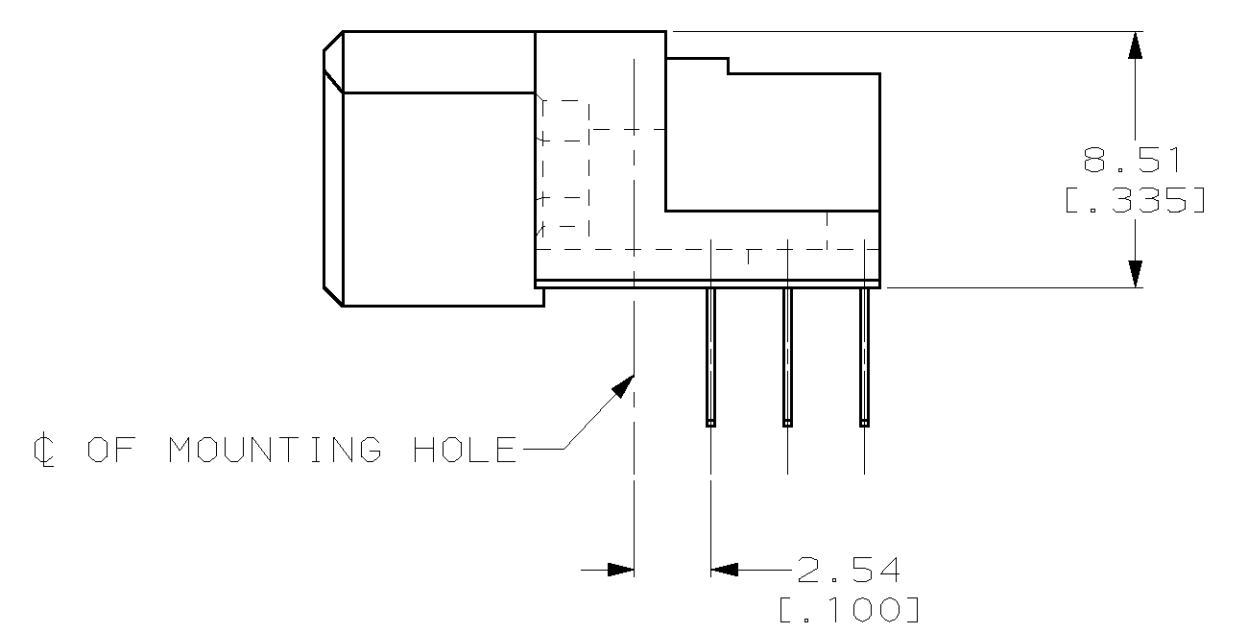


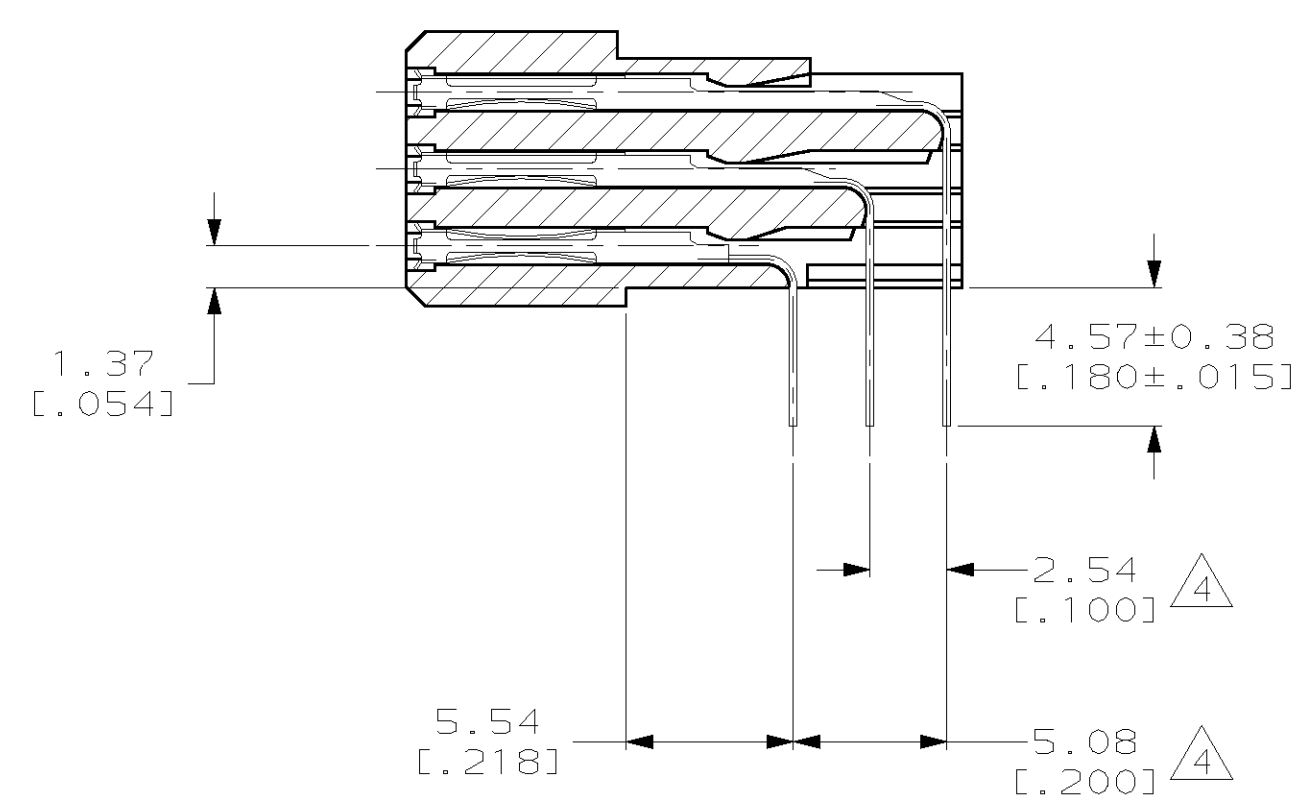

- 1 HOUSING MATERIAL: THERMOPLASTIC, COLOR: BLACK
- 2 CONTACT MATERIAL: COPPER ALLOY
- 3 CONTACT FINISH: 0.000762[.000030] GOLD IN CONTACT AREA OVER 0.00127-0.00254[.000050-.000100] NICKEL UNDERPLATE TIN-LEAD PLATED SOLDER POSTS
- 4 SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT
- 5 HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE
- 6 SEE SHEET 2 FOR LOADING PATTERN AND P.C. BOARD LAYOUT

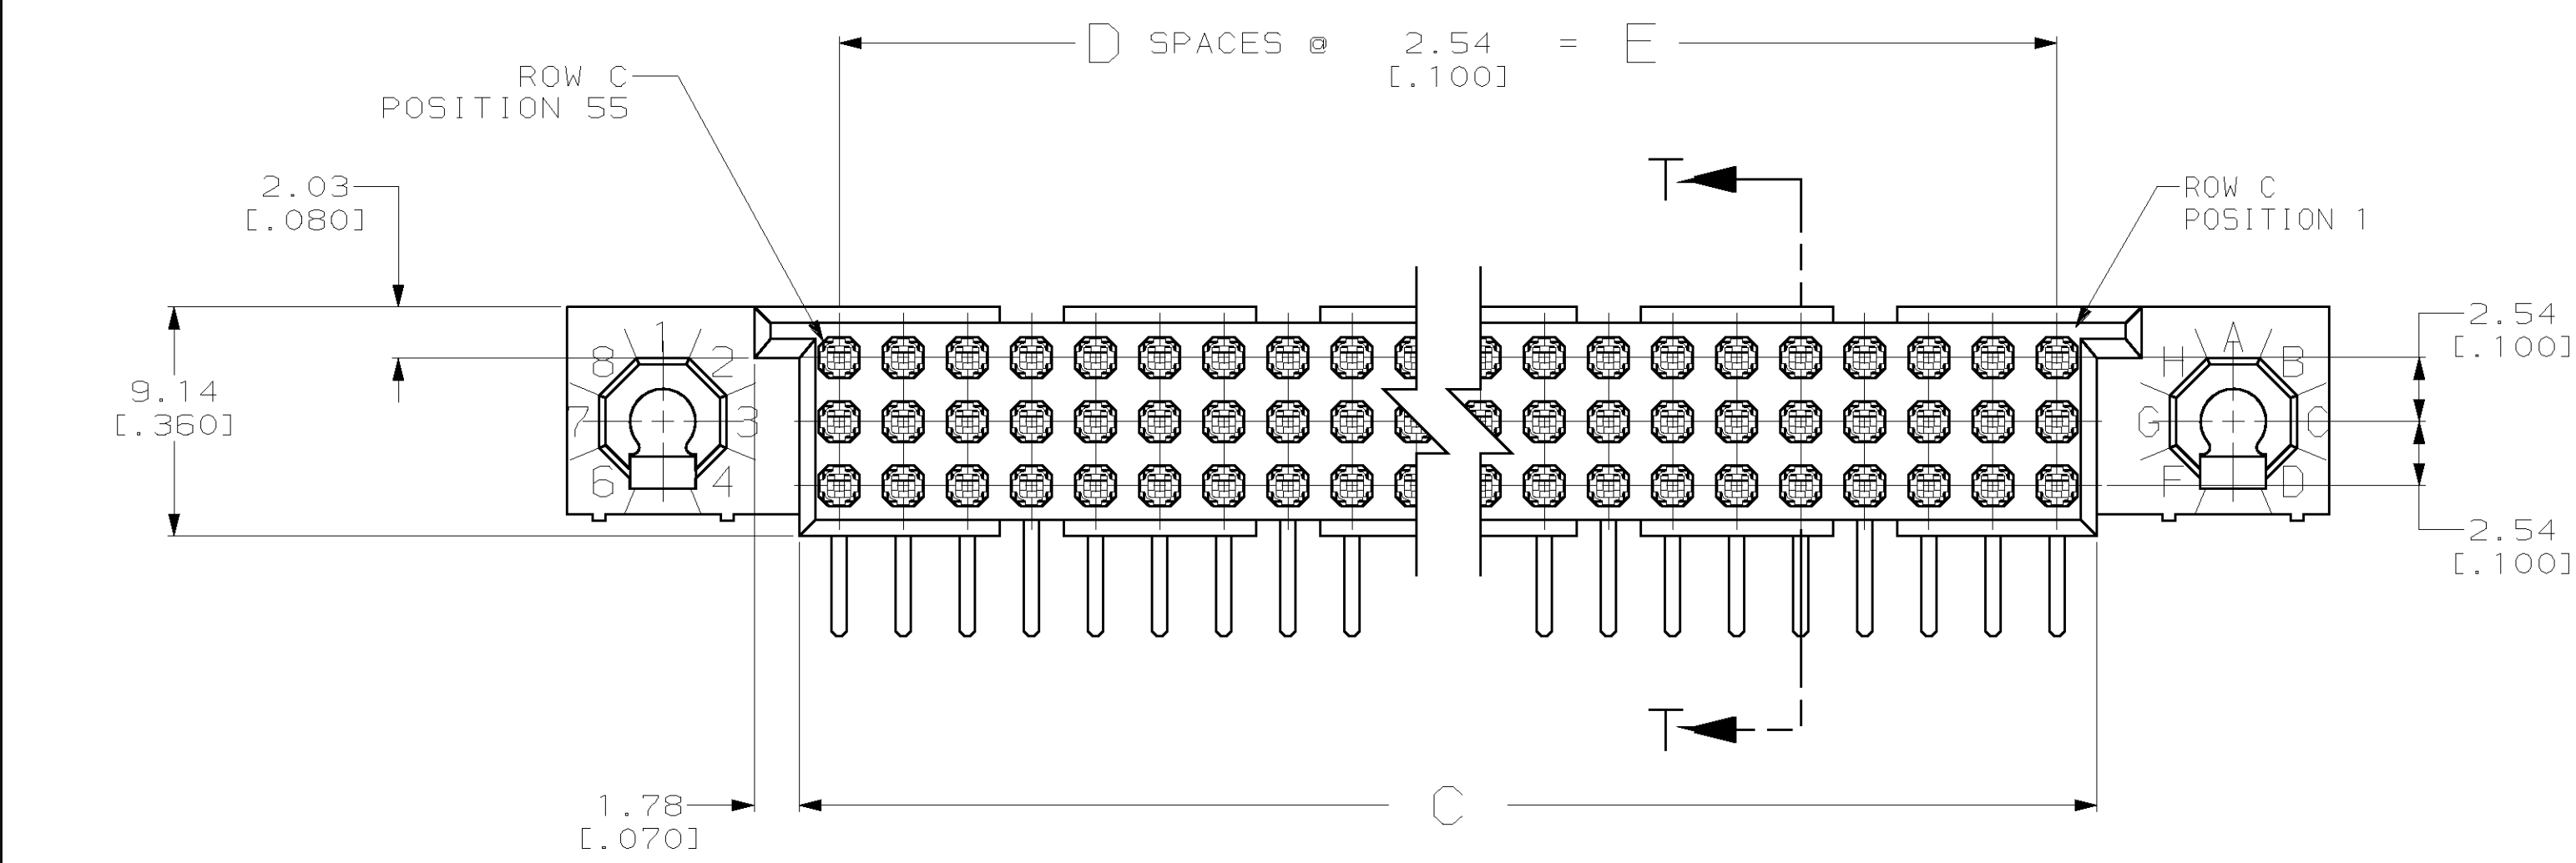

OBSOLETE	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	69 6	532834-2
	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	107 6	532834-1
	E	D	C	B	A	POSITION	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN OK 23JUL2003		SCHURM 23JUL2003		Tyco Electronics Harrisburg, PA 17105-3508	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		PRODUCT SPEC	
		0 PLC ± 1 PLC ± 2 PLC ±0.13(.005) 3 PLC ± 4 PLC ± ANGLES ±		WL MILLIMETRES		HD1, 3 ROW, RECEPTACLE ASSEMBLY, SPECIAL LOADING, 0.00076(.000030) GOLD PLATING	
MATERIAL 		FINISH - 		WEIGHT -		RESTRICTED TO	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 2		REV F	

