

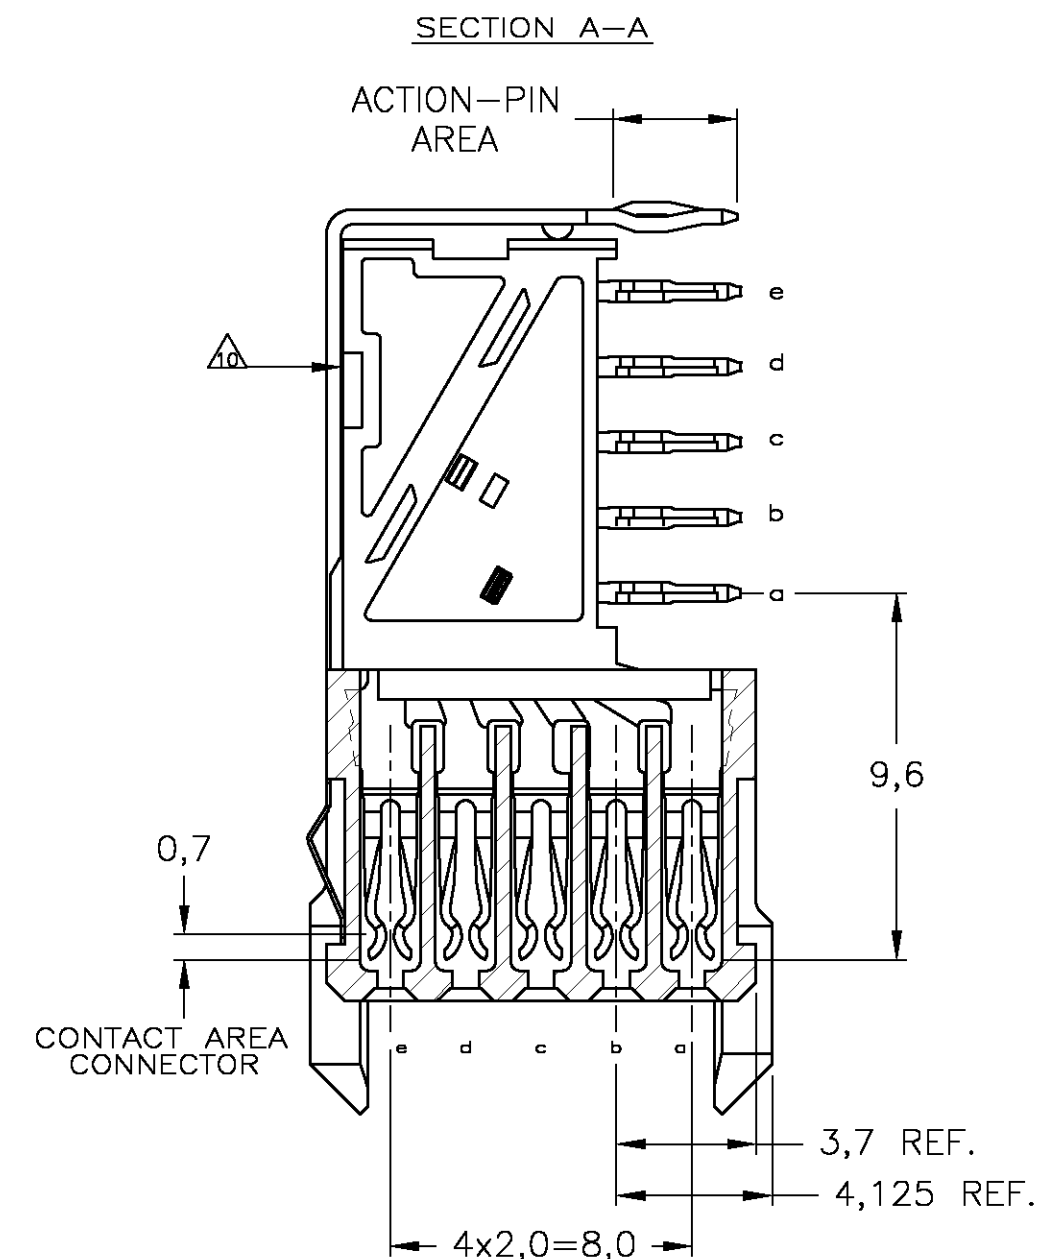
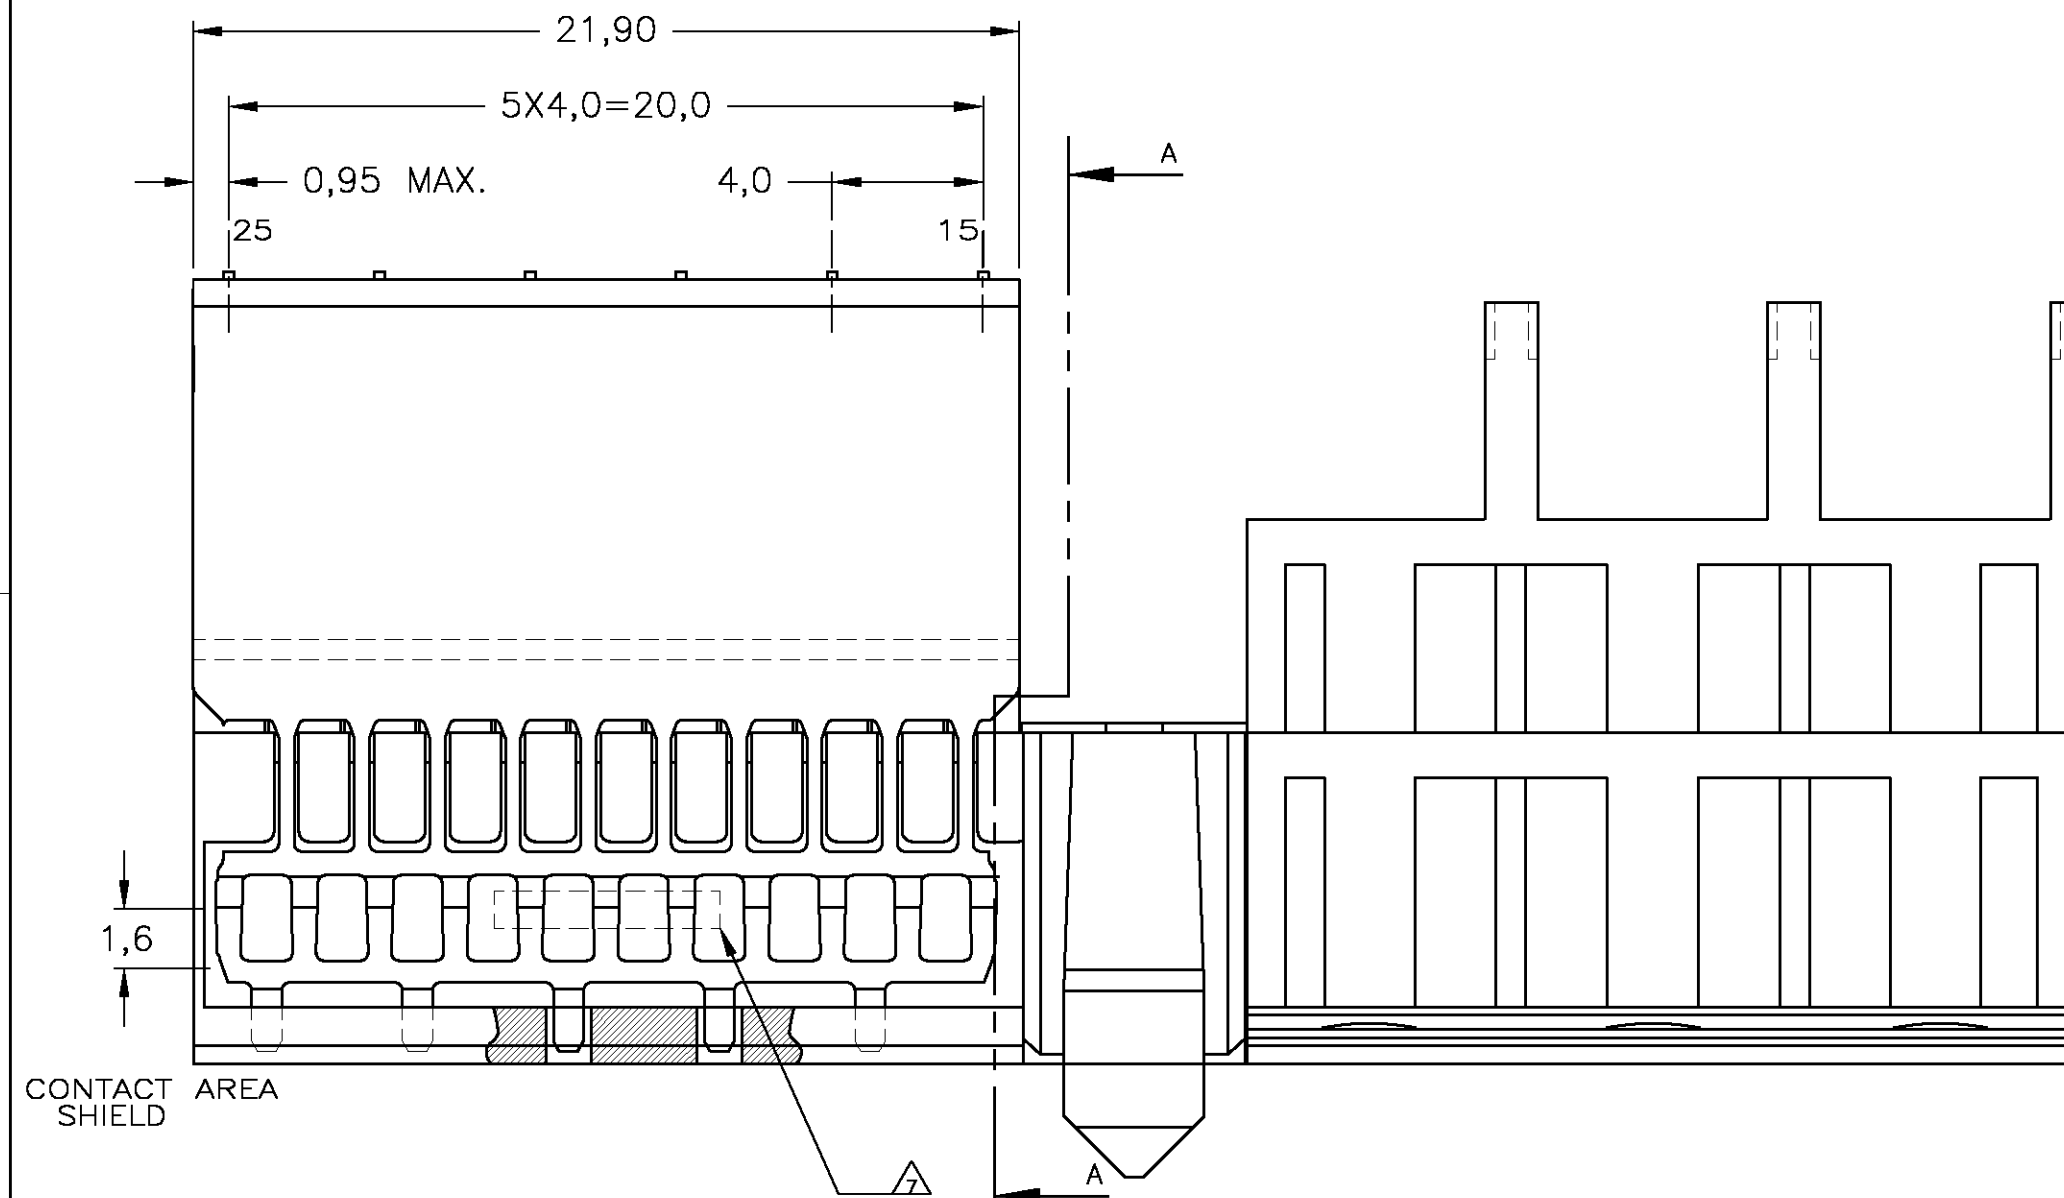


LOC	DIST	REVISIONS					
H	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	ECR-07-030919	21DEC2007	JvH	BM

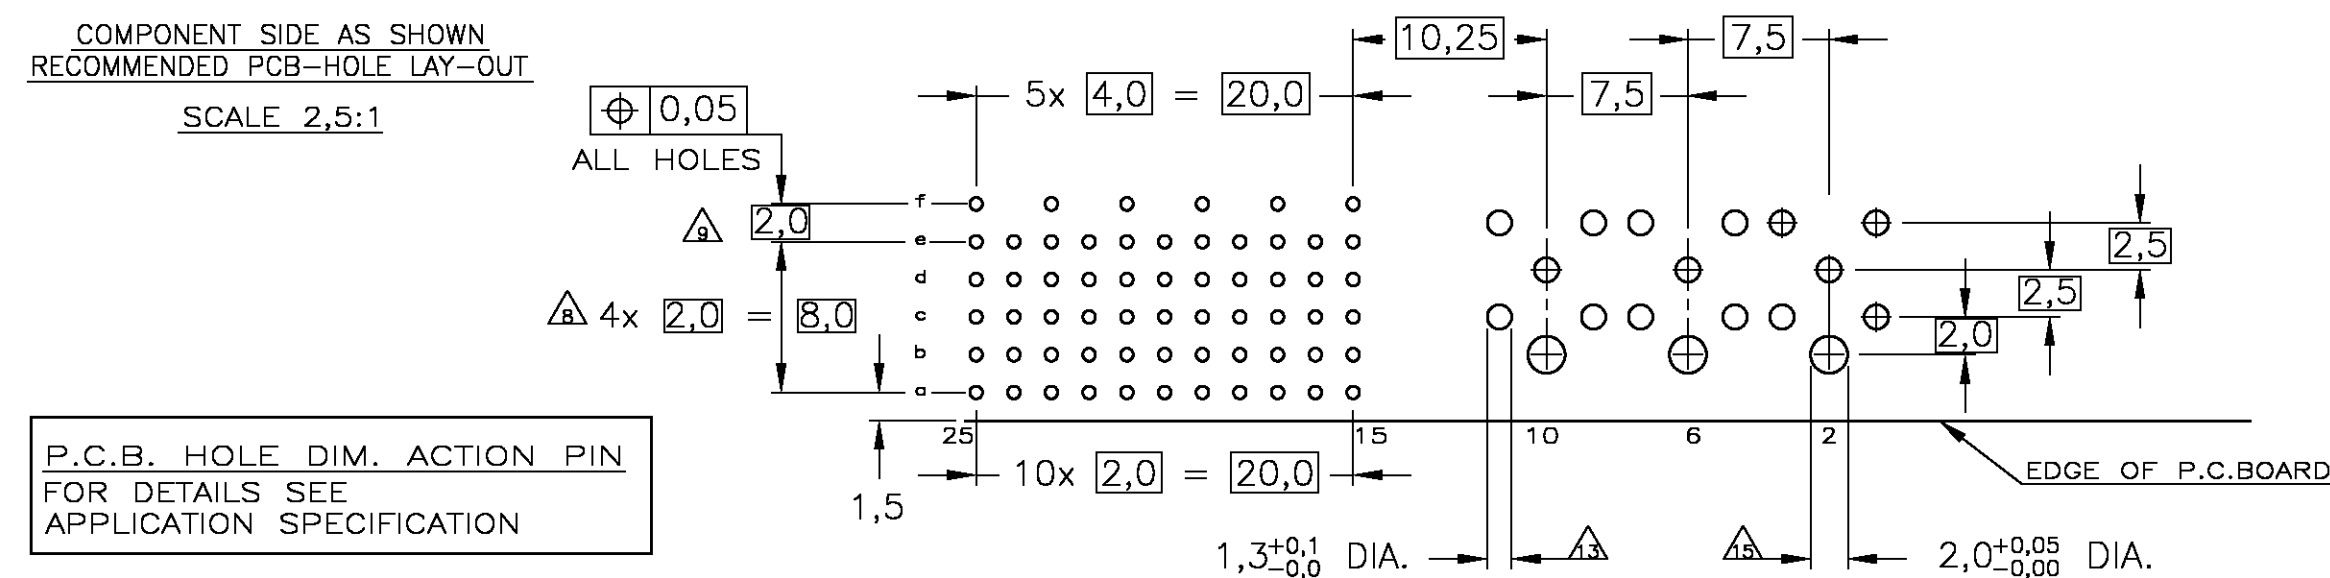


NOTES:

- 1 MATERIAL CONTACTS ; PHOSPHORBRONZE
 MATERIAL SHIELDING ; PHOSPHORBRONZE
 MATERIAL HOUSING ; GLASSFILLED POLYESTER (GRAY)
 UL-RATING 94V0.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
 (ENTIRE CONTACT): 1,27 μ m NICKEL MIN. AND ACTION
 PIN: 0,5 μ m TIN MIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE
 SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
 PERFORMANCE LEVEL 2.
- 4 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
 QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 5 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- 6 PLATING SHIELD :
 CONTACT AREA : 0,76 μ m Au MIN.
 ACTION PIN : 0,5 μ m Sn MIN.
 REMAINDER : Ni
- 7 ASSEMBLY PRINTED WITH P/N AND DATE CODE
 THE MARKING CAN APPEAR ON THE FRONT SIDE
 OR BACK SIDE
- 8 HOLE PATTERN FOR FEMALE CONNECTOR TYPE M
 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- 9 ROW "f" 6 PLATED THROUGH HOLES FOR UPPERSHIELD
- 10 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
 ADHESIVE TAPE OR ADHESIVE
- 11 AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
- 12 CONTACT CAVITIES (3x) SUITABLE FOR 4,8 DIA. HIGH CURRENT,
 HIGH FREQUENCY OR FIBRE OPTIC CONTACTS AS PER DIN 41626
 (SEE ALSO NOTE 13).
- 13 1,3 DIA. PLATED-THROUGH HOLES (15x) CAN BE OMITTED
 IF SPECIAL CONTACTS WITH CABLE CONNECTION OR FIBRE
 OPTIC CONTACTS ARE USED.
- 14 THIS ROW OF 11 CAVITIES (B1 TO B11) FOR
 CONNECTOR ASSEMBLY PURPOSE ONLY.
- 15 NOT PLATED-THROUGH HOLES (3x).
- 16 FITS WITH LOWERSHIELD BASIC P/N 5352112

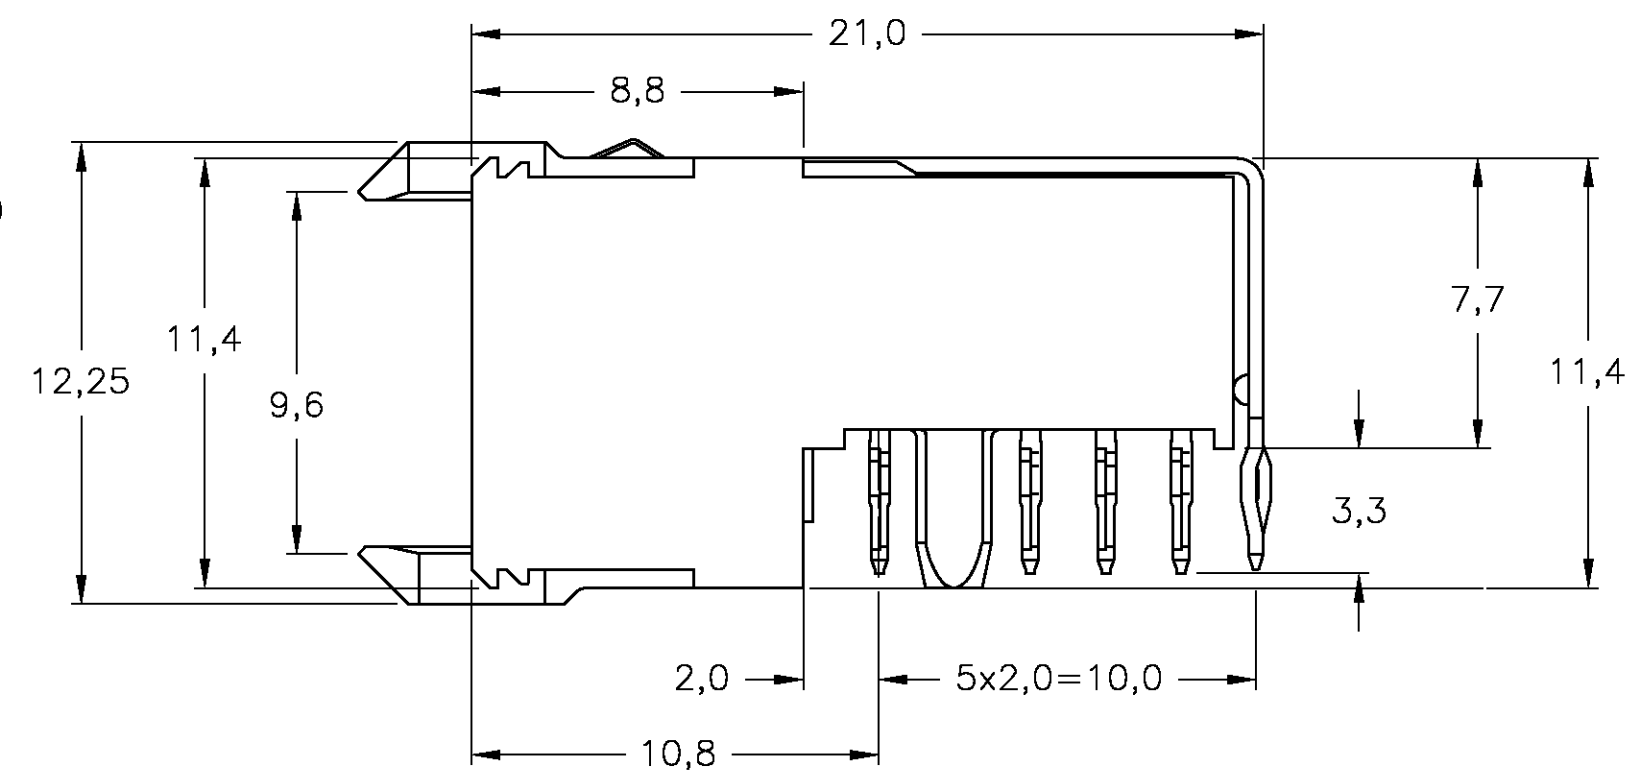

		2 4 5 6 1		5352177-9
		2 3 6 1		5352177-1
		FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 20AUG2004 CHK B.MOOIJ 27OCT2004 APVD B.MOOIJ 27OCT2004	 Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32	
DIMENSIONS: mm	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 4 PLC ± - ANGLES ± ± -	PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029	NAME Z-PACK 2mm HM TYPE M (55 POS.) PRE-SHIELDED RECEPTACLE	
	MATERIAL -	WEIGHT -	SIZE A2	CAGE CODE 00779
		DRAWING NO C-5352177		RESTRICTED TO -
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1
			REV B2	