

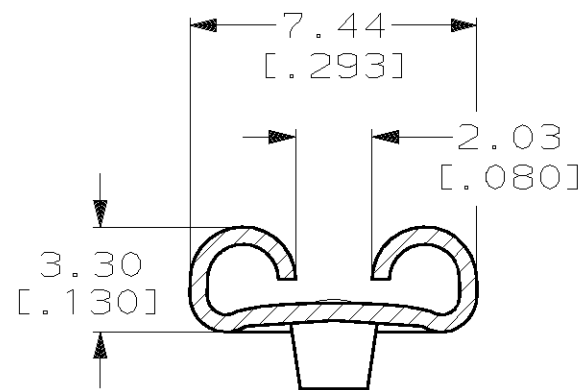


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				E	ADDED -5 PER 0G3A-0200-00	15MAR00	JR/DB

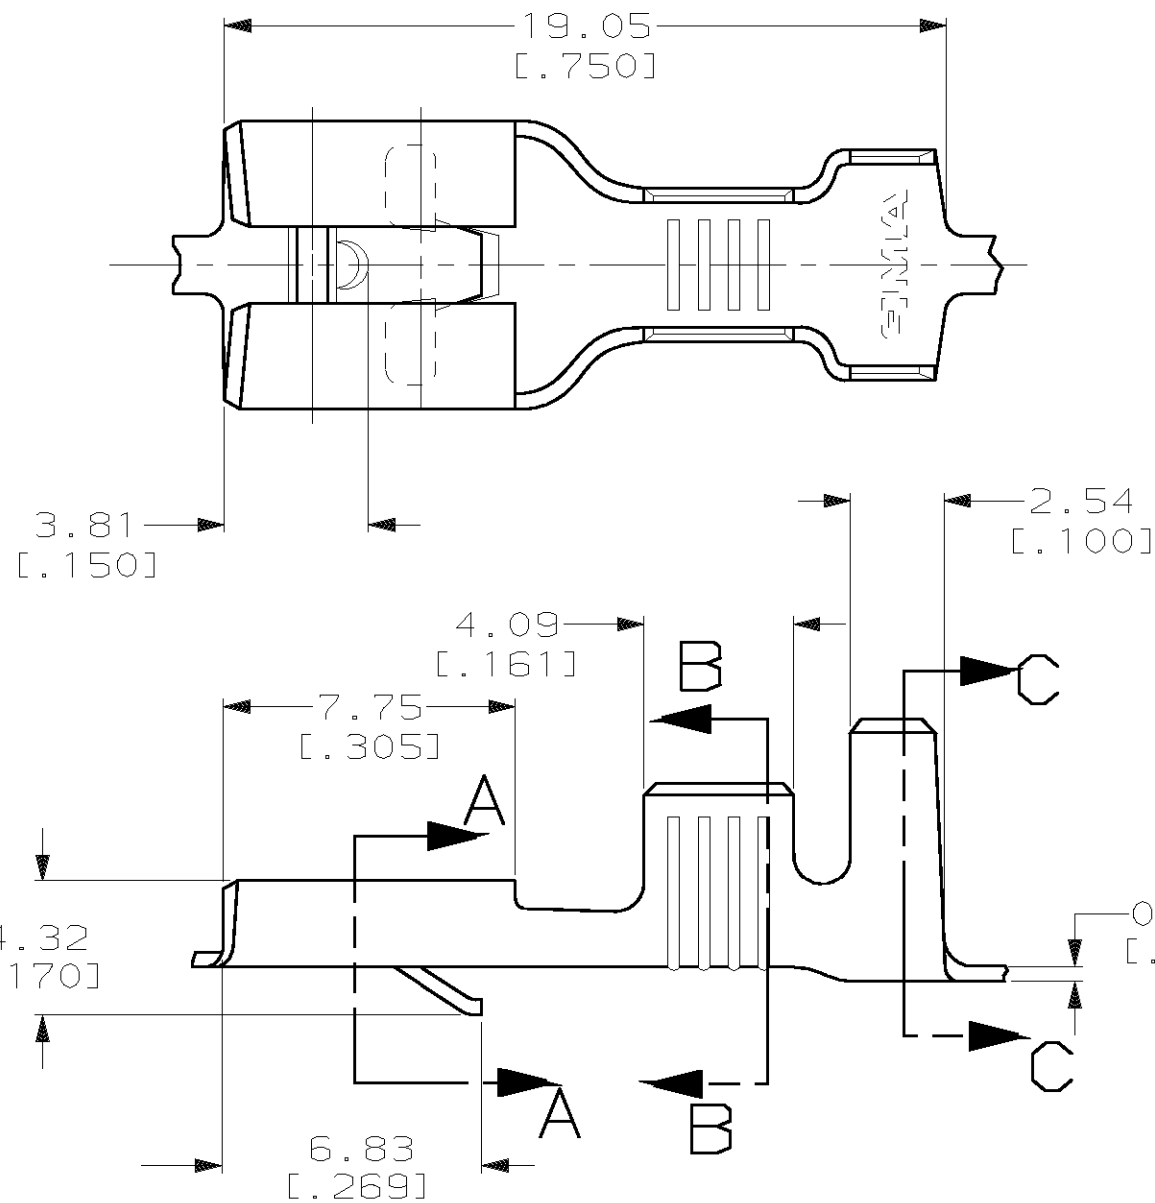

SECTION A-A

- CONTINUOUS STRIP ON REELS.
- ACCEPTS WIRE SIZE [#16-#12 OR TWO #16'S].
- INSULATION RANGE TO BE 4.06-5.33 [.160-.210] OR TWO 3.30 [.130] MAX DIA.
- MATING TAB THK IS 0.81±0.025 [.032±.001].
- INTERLEAVING PAPER REQUIRED.
- PRELIMINARY - NOT FOR PRODUCTION

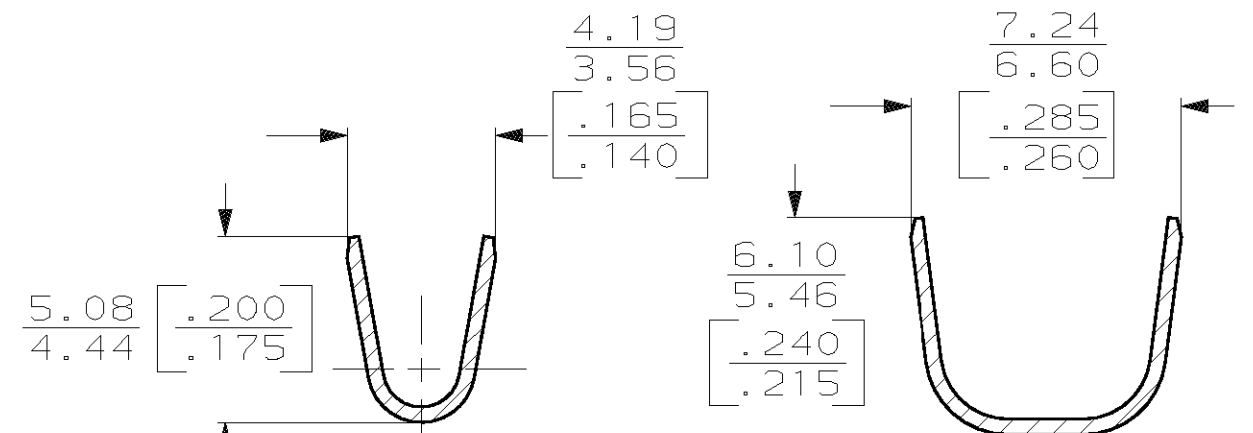

SECTION B-B

SECTION C-C

△ 0.002032 [.000080] MIN TIN	△ 60249-5
0.000381 [.000015] THK SILVER	60249-3
0.002032 [.000080] MIN TIN	60249-2
-	60249-1

FINISH

PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.38 [.015] 3 PLC DEC ± - ANGLES ± -	DR 7/14/95 JR RUTH CHK 7/14/95 MS FEHER APPD 7/14/95 J GILLESPIE APPD 7/14/95 R REINER PRODUCT SPEC -	AMP AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL H04 BRASS	FINISH SEE TABLE	NAME RECEPTACLE, FASTIN-FASTON, 6.35 [.250] SERIES	
		SIZE B	CAGE CODE 00779
		SCALE 5:1	DRAWING NO C-60249
		WEIGHT -	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.