

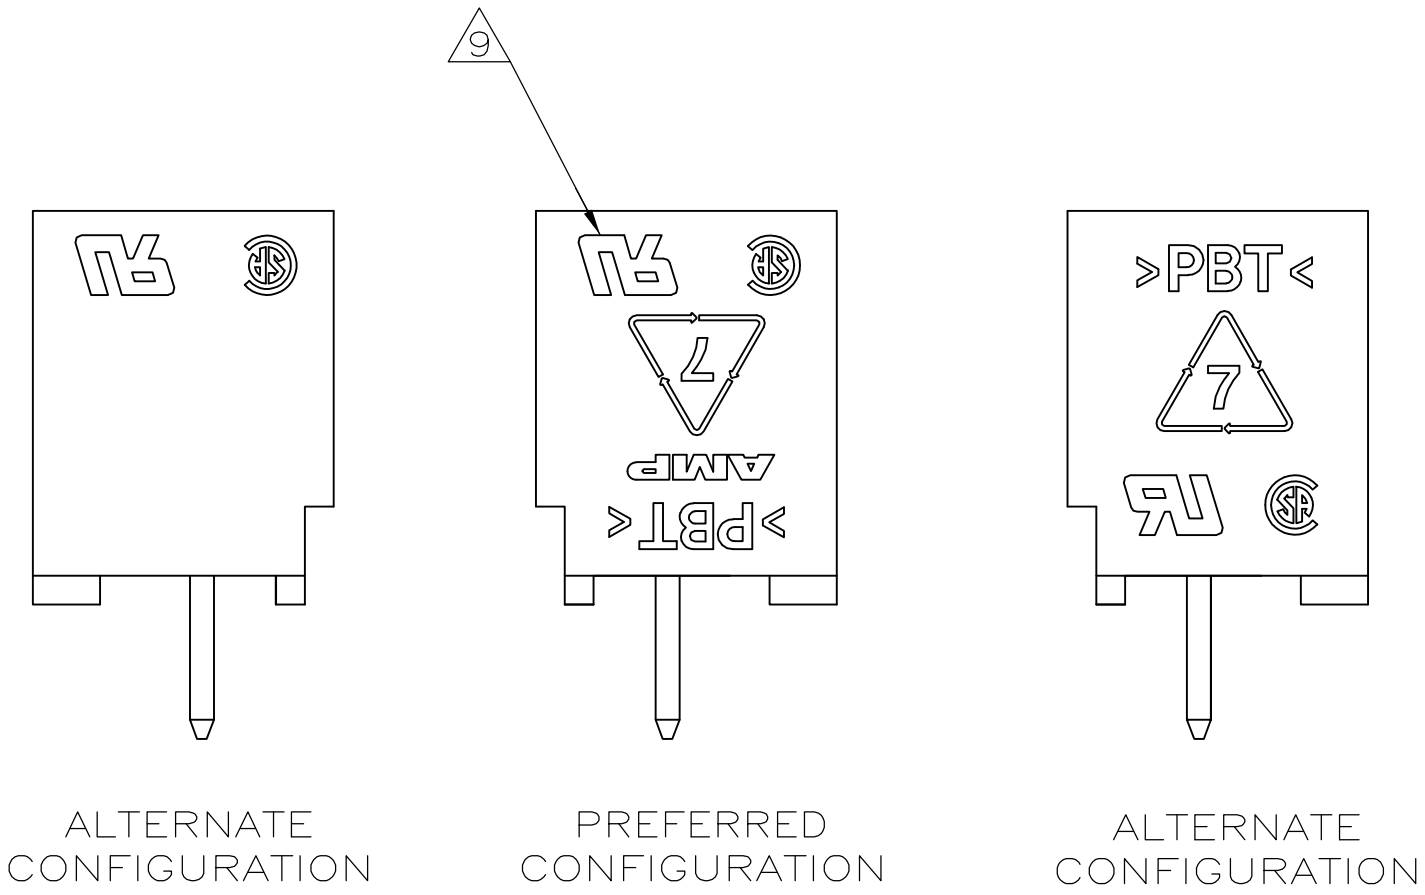
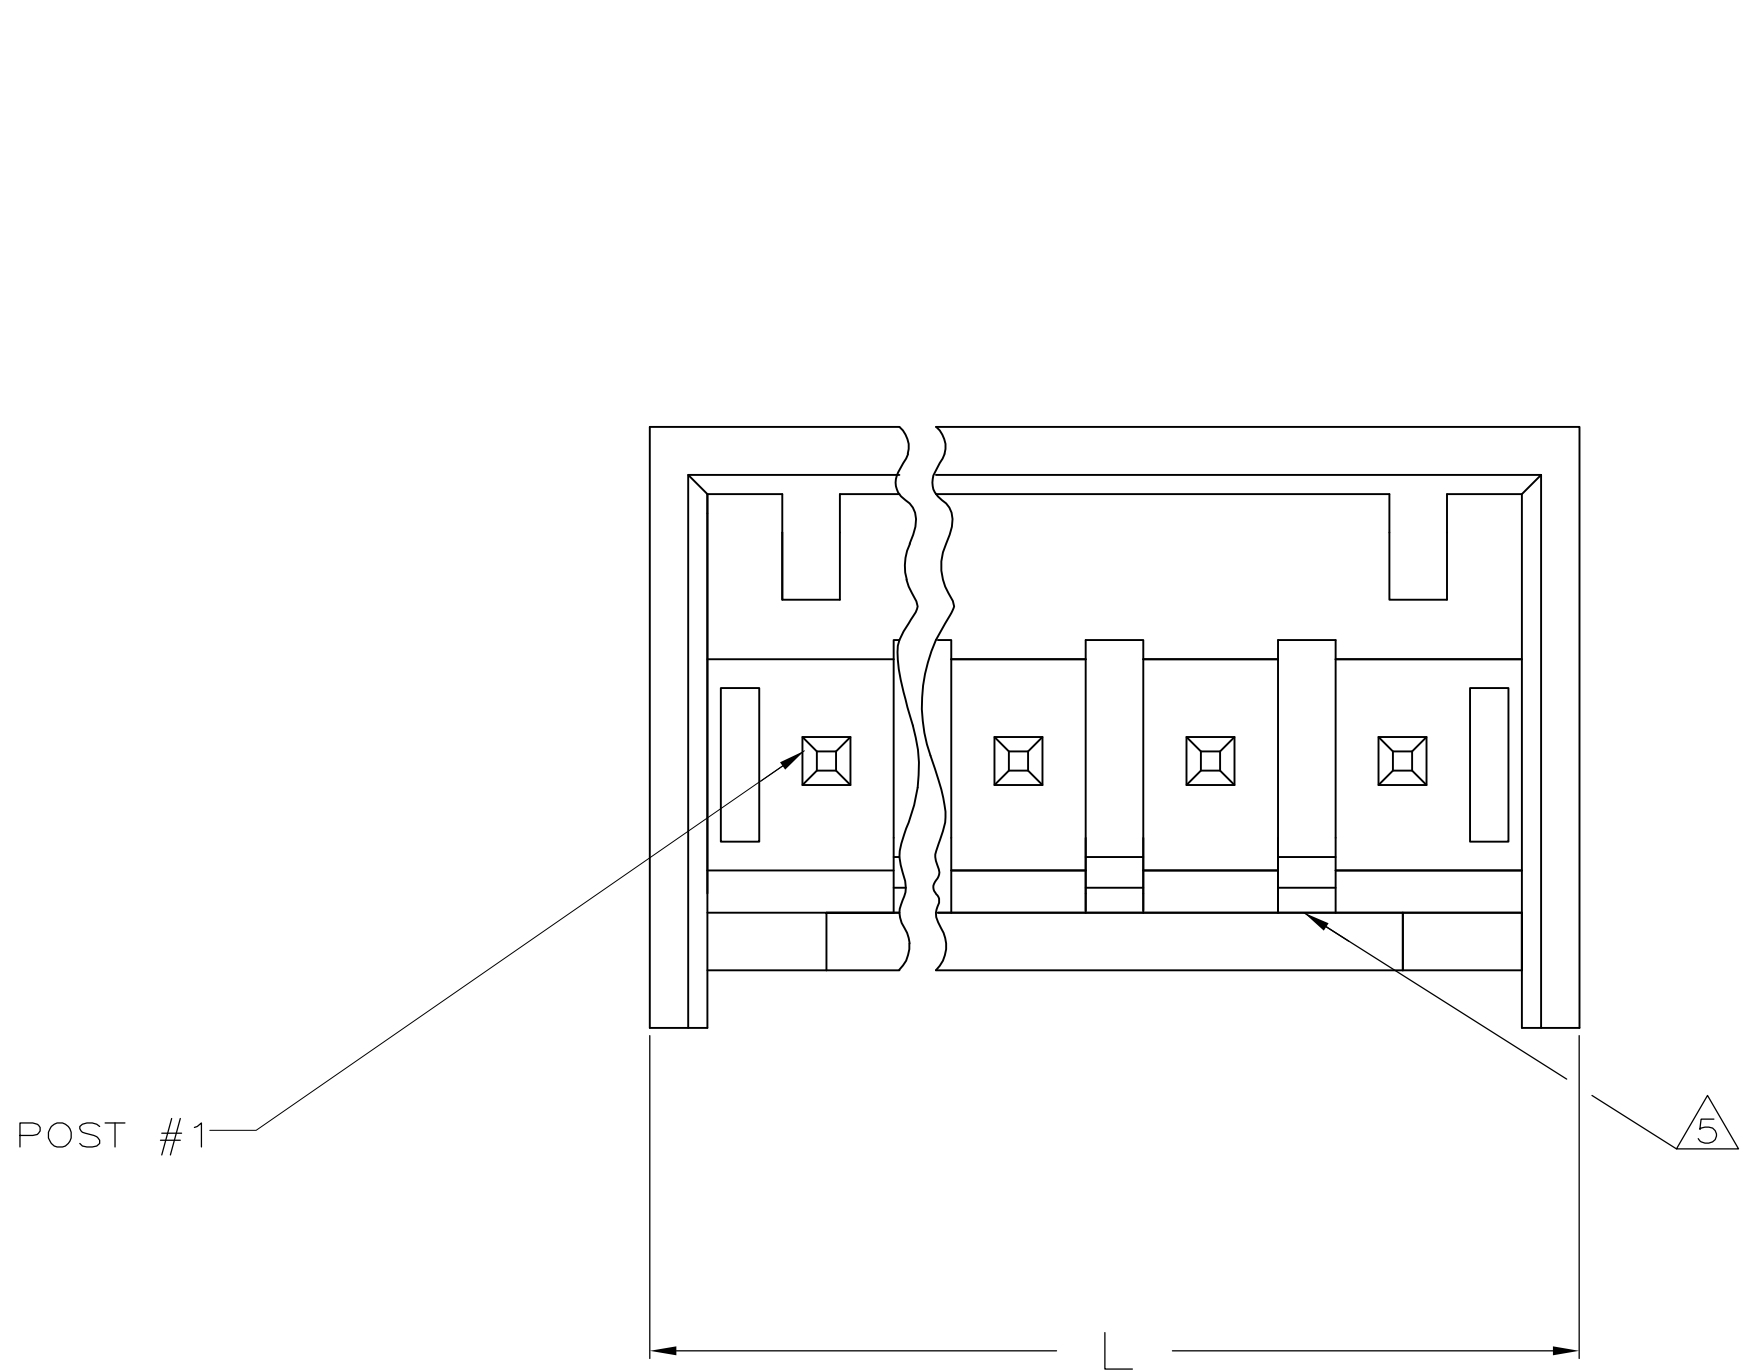
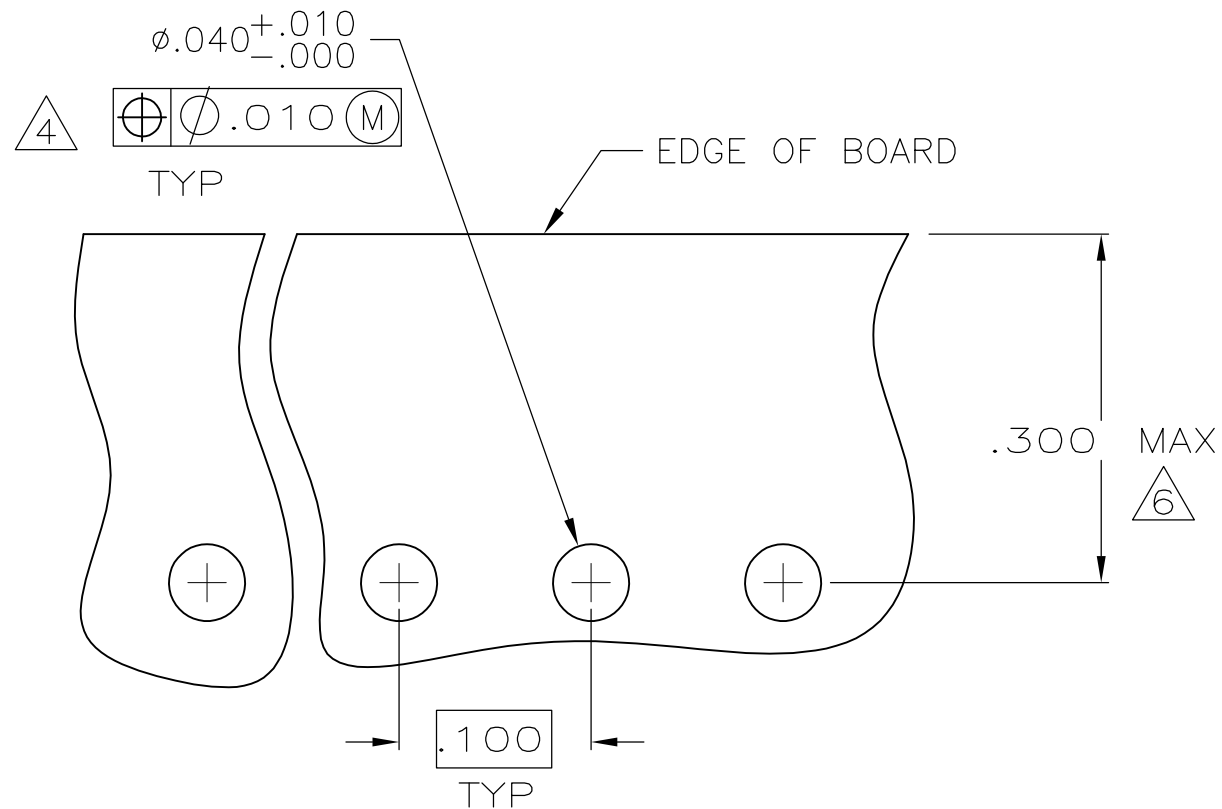


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00						
			K	ECO-07-018567	12SEP07	KW	DB

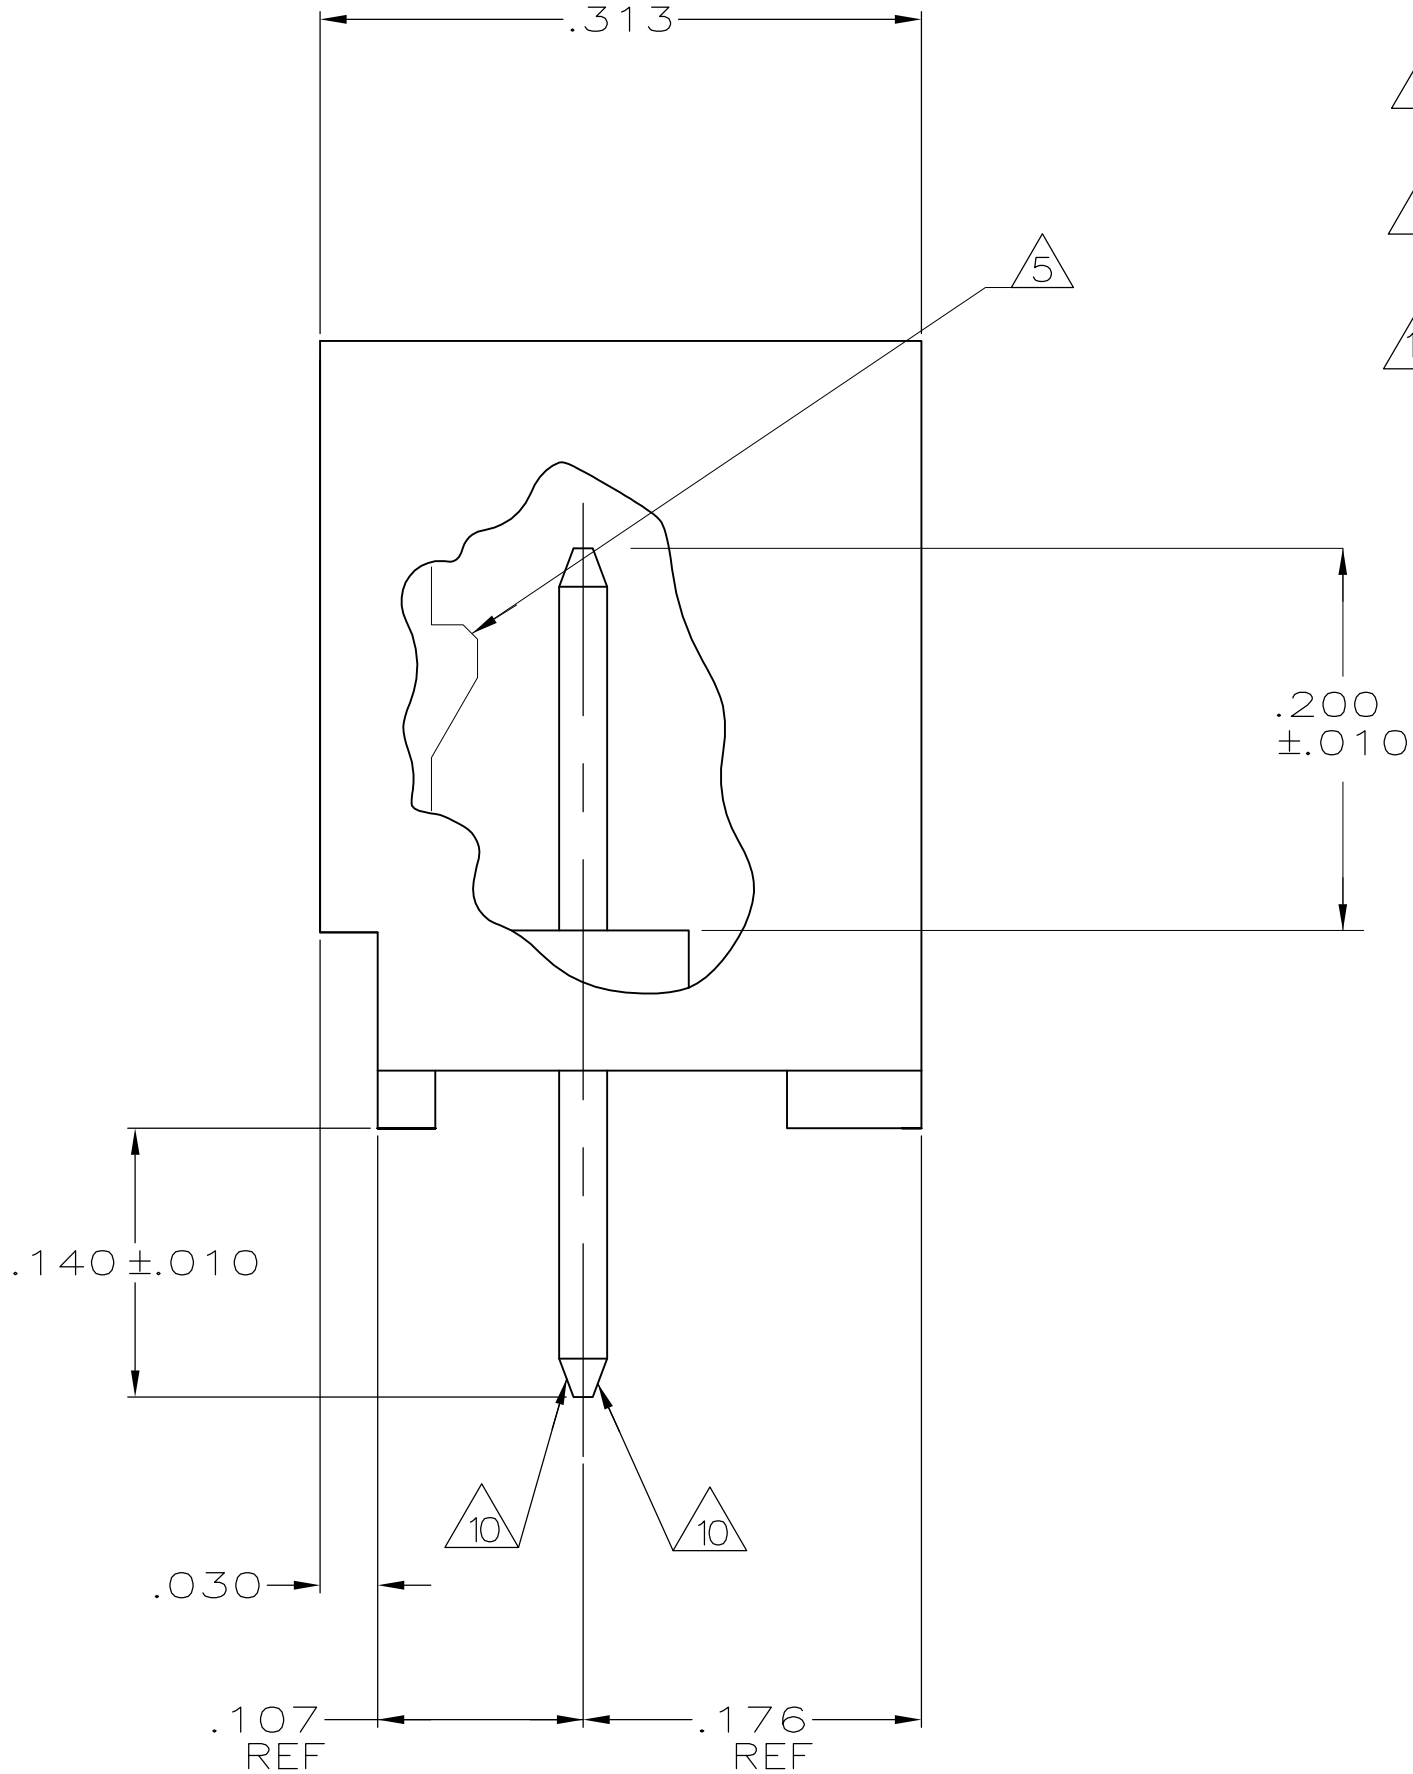


POSSIBLE MARKING CONFIGURATIONS
SCALE 5:1

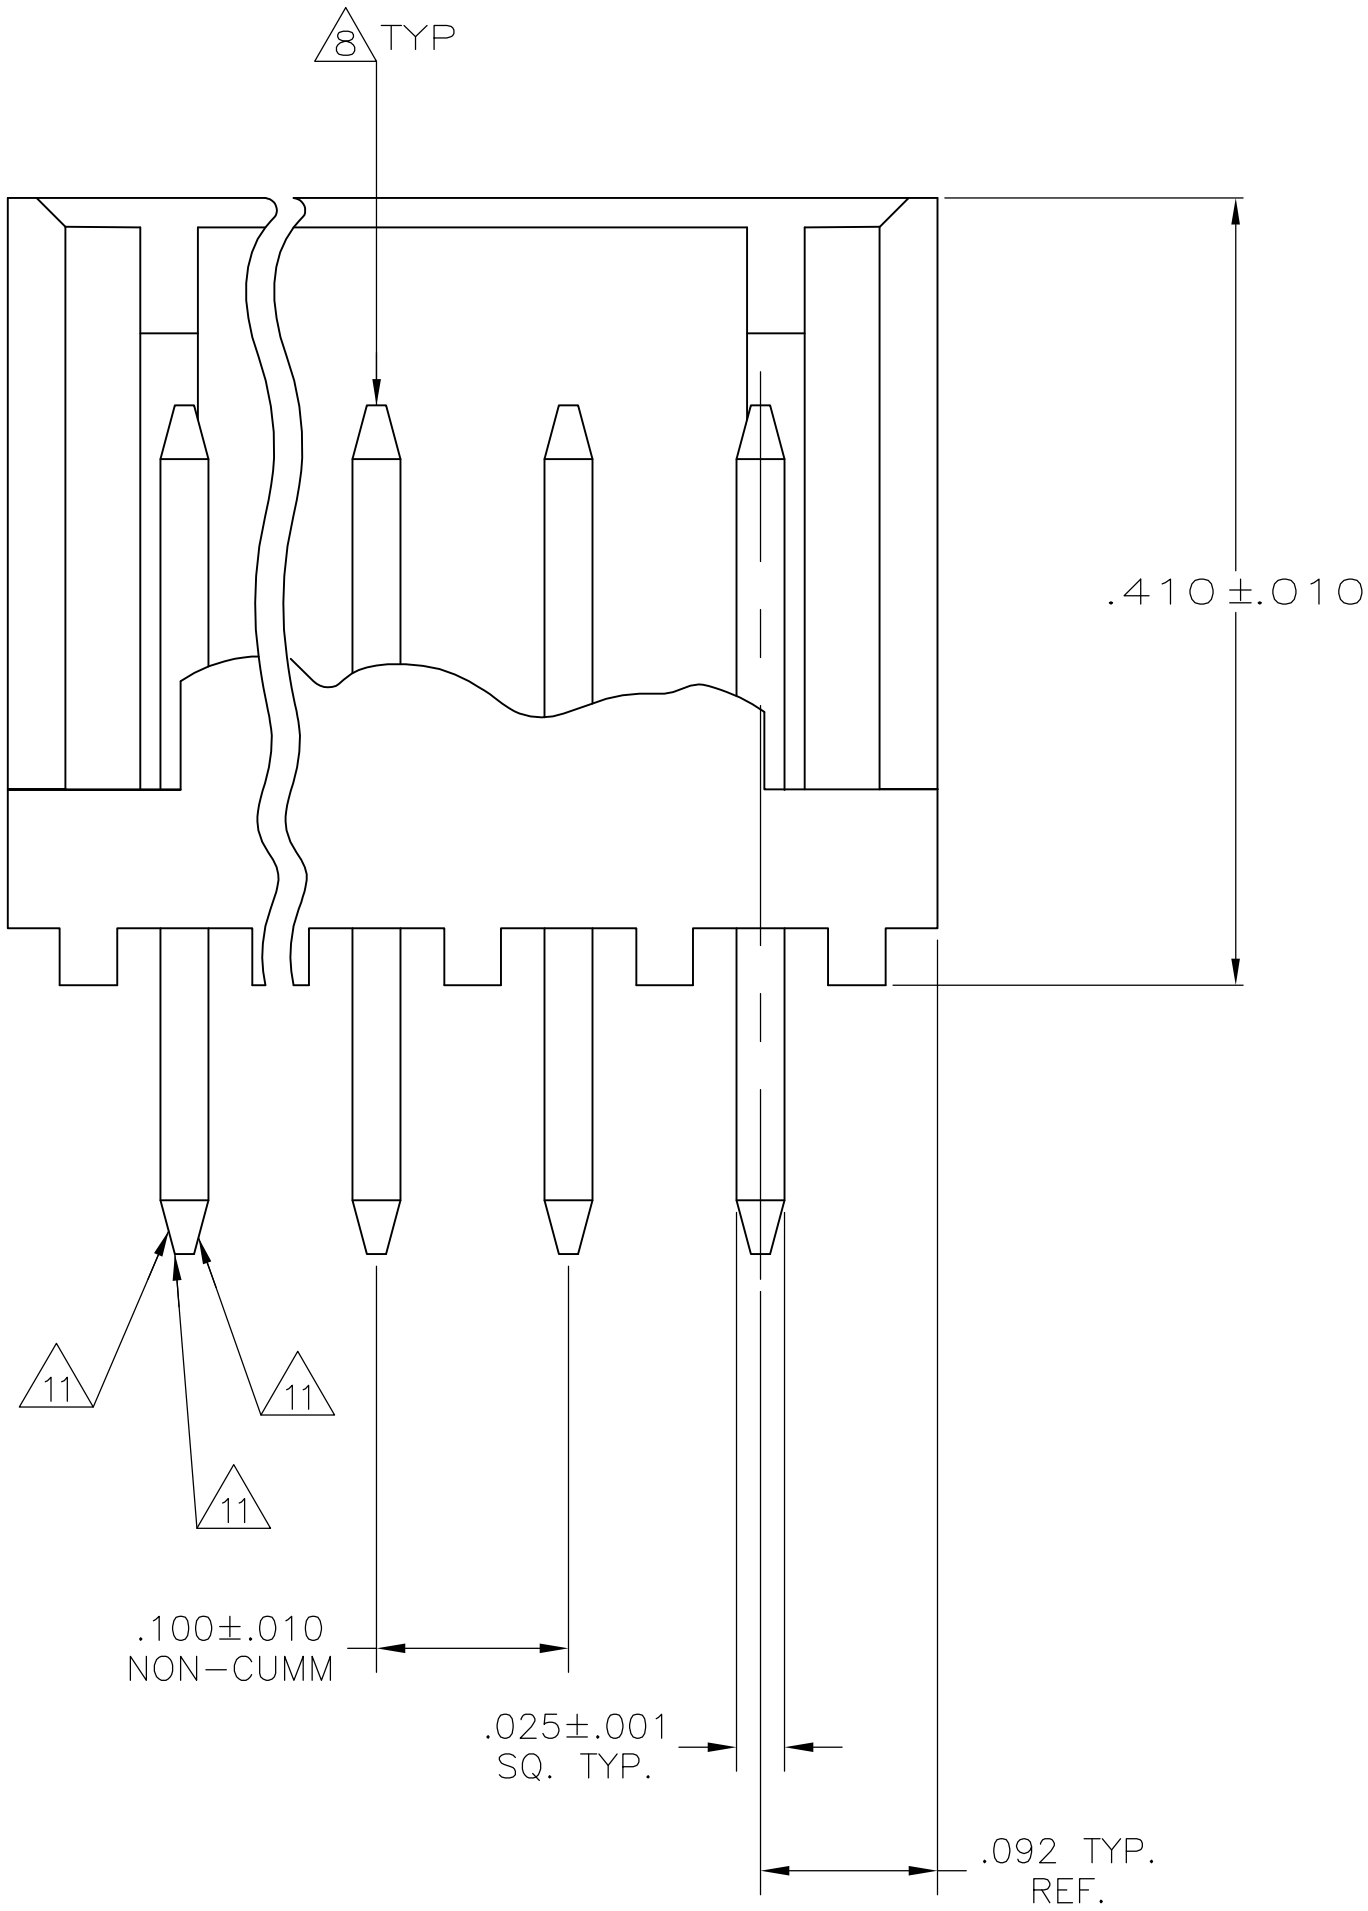

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THK PRINTED CIRCUIT BOARD

.035	0.89	.176	4.47	—	—
.032	0.81	.140	3.56	—	—
.030	0.76	.107	2.72	—	—
.025	0.64	.100	2.54	—	—
.010	0.25	.092	2.34	.410	10.41
.005	0.13	.063	1.6	.313	7.95
.001	0.03	.050	1.27	.300	7.62
.000	0	.040	1.02	.200	5.08
IN	MM	IN	MM	IN	MM

CONVERSION TABLE

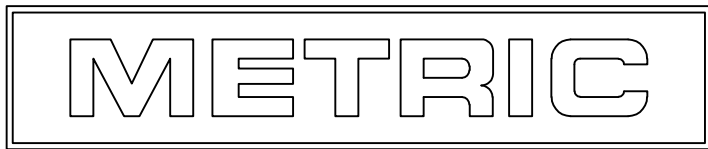

- MATERIAL: HEADER— POLYESTER UL94V-O (BLACK)
POST— COPPER ALLOY.
- SOLDER SIDE OF P.C. BOARD SHOWN.
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-2.
- ONE HOLE MAY BE UNDERSIZED (.032-.035 DIA) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- LATCH DETENT FEATURE OCCURS 2 PLACES ON EACH END (MAXIMUM OF FOUR PER PART). FOR 2 THRU 5 CIRCUIT HEADERS, LATCH FEATURE OCCURS BETWEEN EACH CIRCUIT.
- COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- POST: 100% MATTE TIN PLATED.
- POST MUST WITHSTAND 3.0 LBS (13 NEWTONS) MIN FORCE WITHOUT DISLODGING, EITHER DIRECTION.
- UL AND CSA LOGO WILL APPEAR IN THIS AREA. AMP LOGO MAY APPEAR IN THIS AREA OR ON BOTTOM OF PART.
- TWO SIDES OF TAPER, AS SHOWN, MUST BE PLATED. TYPICAL, BOTH ENDS.
- TWO SIDES OF TAPER, AS SHOWN, AND TIP MAY BE UNPLATED. TYPICAL, BOTH ENDS.
- POST: MATTE TIN-LEAD (93/7) PLATED.

↑ YES	↑ 7	1.484	37.69	14	3-644861-4
		1.384	35.15	13	3-644861-3
		1.284	32.61	12	3-644861-2
		1.184	30.07	11	3-644861-1
		1.084	27.53	10	3-644861-0
		.984	24.99	9	2-644861-9
		.884	22.45	8	2-644861-8
		.784	19.91	7	2-644861-7
		.684	17.37	6	2-644861-6
		.584	14.83	5	2-644861-5
		.484	12.29	4	2-644861-4
		.384	9.75	3	2-644861-3
	.284	7.21	2	2-644861-2	
↑ NO	↑ 12	1.484	37.69	14	1-644861-4
		1.384	35.15	13	1-644861-3
		1.284	32.61	12	1-644861-2
		1.184	30.07	11	1-644861-1
		1.084	27.53	10	1-644861-0
		.984	24.99	9	644861-9
		.884	22.45	8	644861-8
		.784	19.91	7	644861-7
		.684	17.37	6	644861-6
		.584	14.83	5	644861-5
		.484	12.29	4	644861-4
			.384	9.75	3
	.284	7.21	2	644861-2	
LEADFREE	FINISH	IN	MM	NO OF POSITIONS	PART NUMBER
		L		HEADER ASSEMBLY	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S. CARPENTER
28MAY2003

CHK
D. BOSSI
28MAY2003

TYCO ELECTRONICS

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

APVD
D. BOSSI
28MAY2003

NAME
MTA-100 SHROUDED HEADER ASSEMBLY,
FRICTION LOCK, STRAIGHT POST,
TIN OR TIN LEAD PLATED

MATERIAL
1

SEE TABLE

WEIGHT

CUSTOMER DRAWING

SIZE
A1

CAGE CODE
00779

DRAWING NO
644861

RESTRICTED TO
-

SCALE
10:1

SHEET
1

OF
1

REV
K

AMP 4805 REV 31MAR2000