
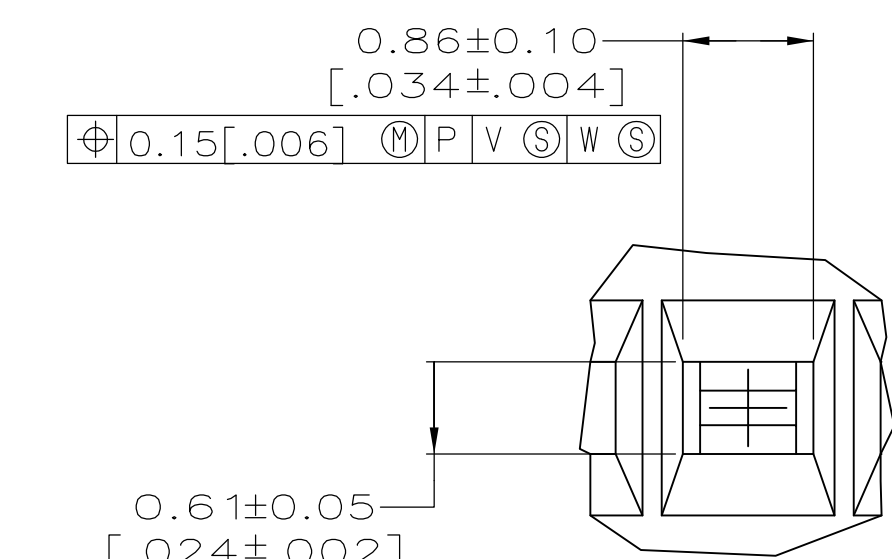
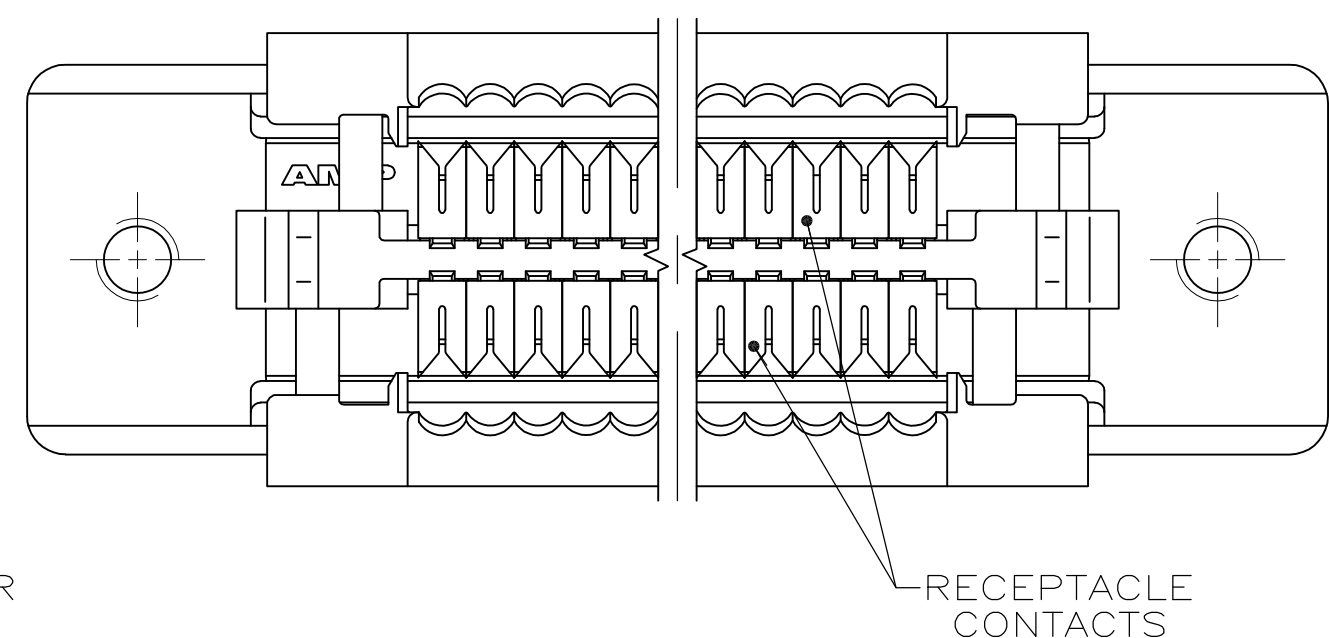




6 PLATING:
 RECEPTACLE CONTACTS- 0.76μm [.000030] MIN GOLD OR
 0.076-0.127μm [.000003-.000005] GOLD FLASH OVER
 0.76μm [.000030] MIN PALLADIUM NICKEL IN CONTACT AREA,
 1.27μm [.000050] MIN TIN IN TERMINATION AREA,
 ALL OVER 1.27μm [.000050] MIN NICKEL.
 RECEPTACLE SHELL- 5.08μm [.000200] MIN NICKEL OVER
 1.27μm [.000050] MIN COPPER.
 PANEL MOUNT BRACKET- 5.08μm [.000200] MIN NICKEL OVER
 7.62μm [.000300] MIN COPPER.

THIS DRAWING IS A CONTROLLED DOCUMENT:		DWN M.MCCAFFREY 08/25/89		Tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK J.BROSCHARD 09/05/89			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		APPRO R.WHITEMAN 10/24/89		RECEPTACLE CABLE ASSEMBLY, PANEL MOUNT, AMPLITUDE .050 Series	
		PRODUCT SPEC			
		108-1228			
		APPLICATION SPEC			
MATERIAL		1.14-40029		SIZE CAGE CODE DRAWING NO	
FINISH		WEIGHT		A1 00779 C=749611	
SEE TABLE		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV T	