

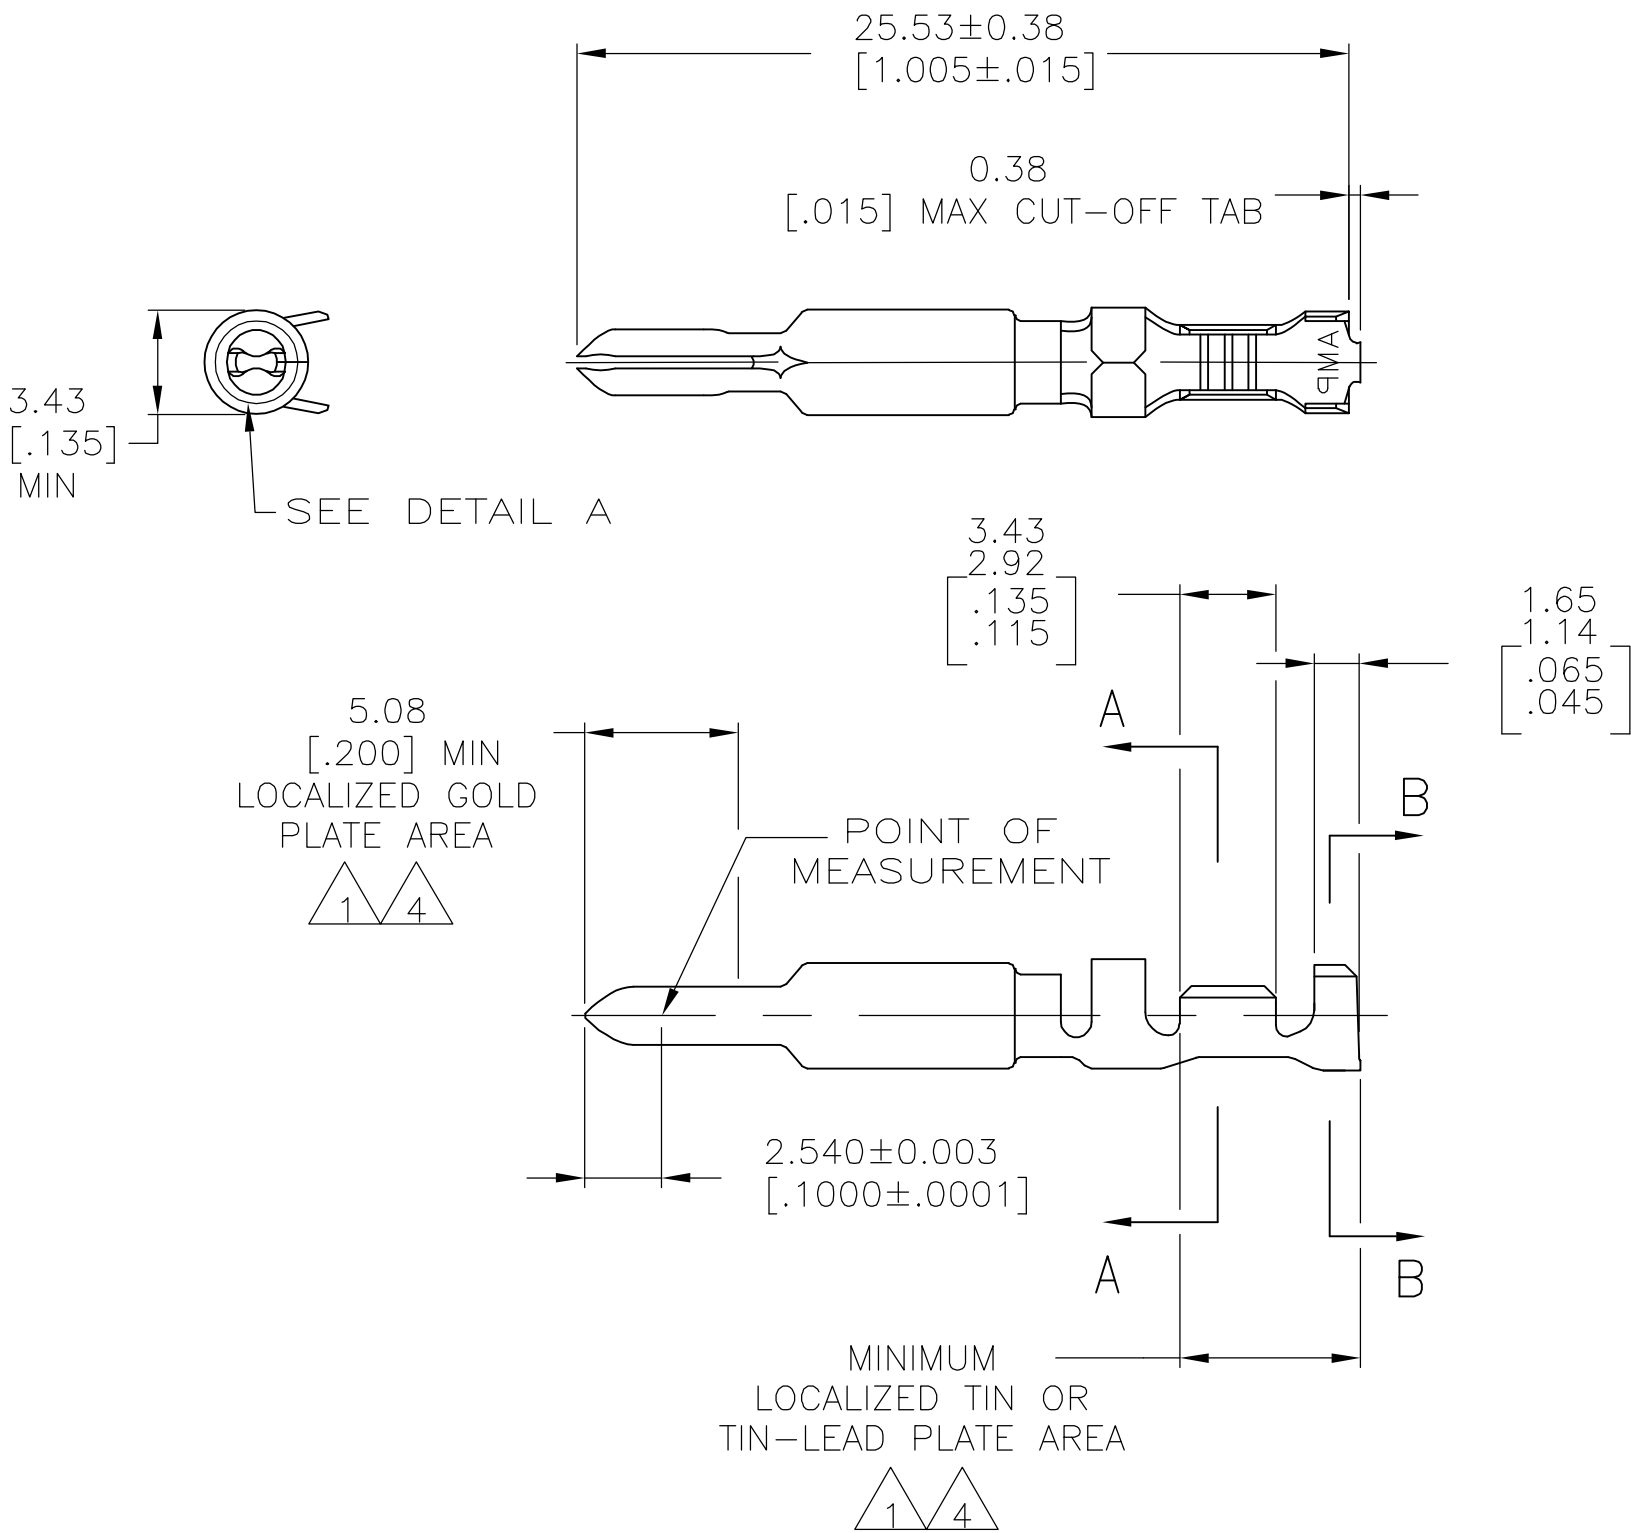
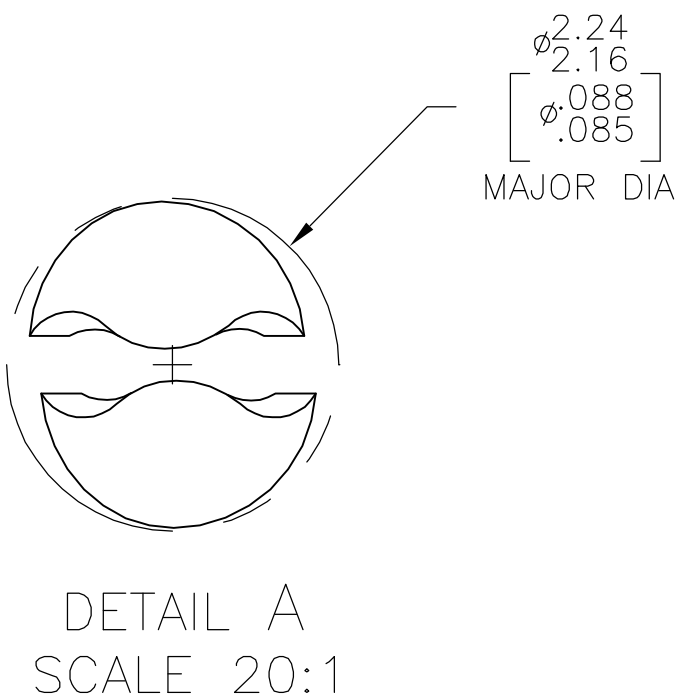


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		F	EC 0G3B 0215 05	23SEP05	BSV	RCJ

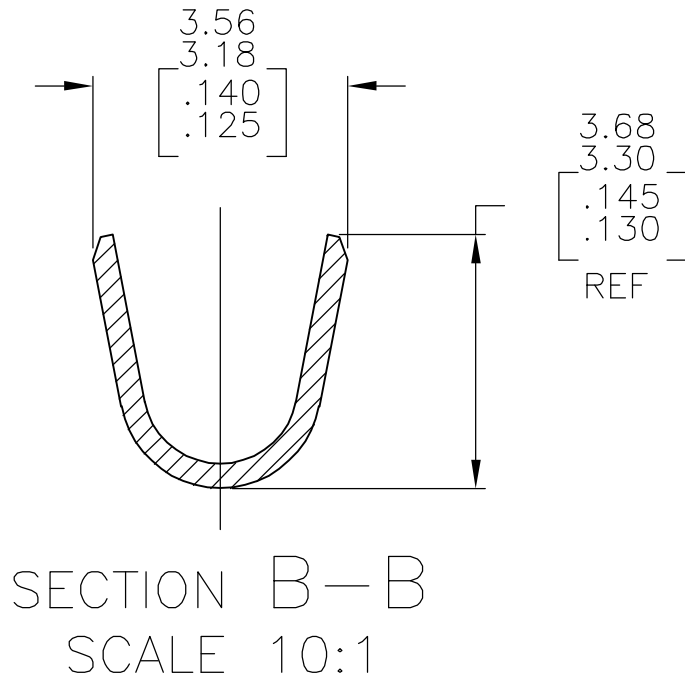

1. 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
2. WIRE RANGE: 0.2–1mm² [24–18 AWG].
INSULATION RANGE: 1.02–2.54 [.040–.100] DIA.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

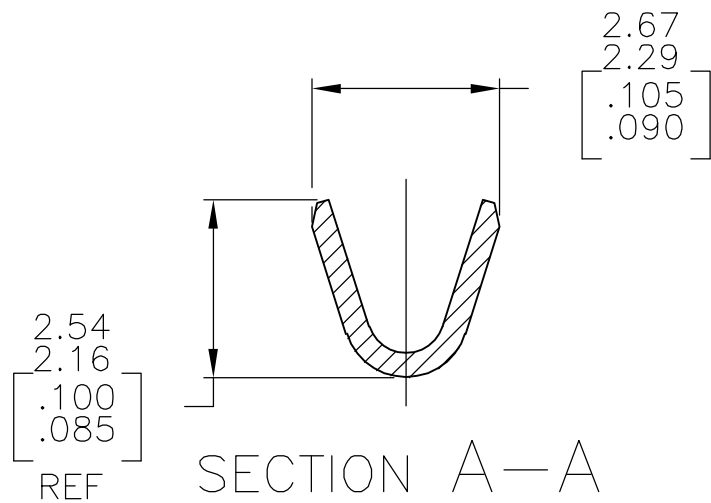

METRIC

GOLD 4	0.30 [.012]	BRASS	1–770252–0
GOLD 1	0.30 [.012]	BRASS	770252–2
PRE–TIN	0.30 [.012]	BRASS	770252–1
FINISH	MATERIAL		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 30SEP04	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105–3608			
		CHK C.JONES 30SEP04				
DIMENSIONS: mm [INCHES]		APVD C.JONES 30SEP04	NAME PIN, LOOSE PIECE, UNIVERSAL MATE–N–LOK(TM) II			
		PRODUCT SPEC	SIZE A2			
		APPLICATION SPEC				
MATERIAL –		WEIGHT –	CAGE CODE 00779	DRAWING NO C=770252	RESTRICTED TO –	
FINISH –		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1	REV F	