

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-09-024890	23NOV2009	DD	RB



776535-2
SCALE 2:1
KEY B



776535-3
SCALE 2:1
KEY C




776535-4
SCALE 2:1
KEY D

1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK

2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: YELLOW

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm

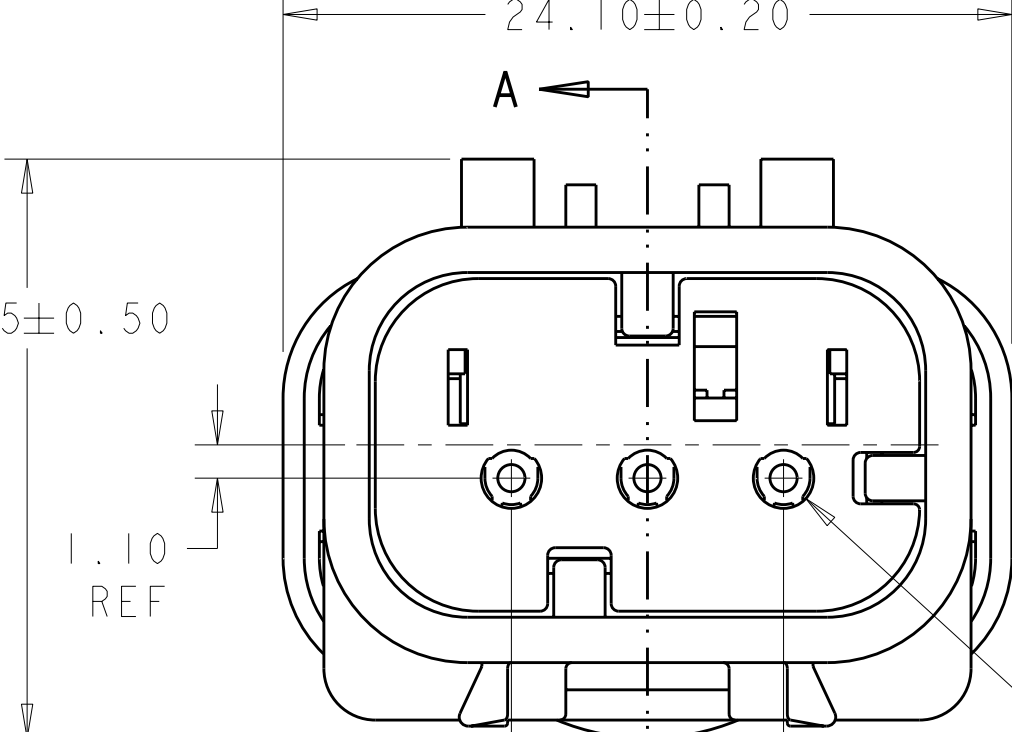

24.10±0.20

19.15±0.50


1.10 REF

Ø2.00 REF
3 PLC

4.50 REF

9.00 REF

776535-1 SHOWN
KEY A

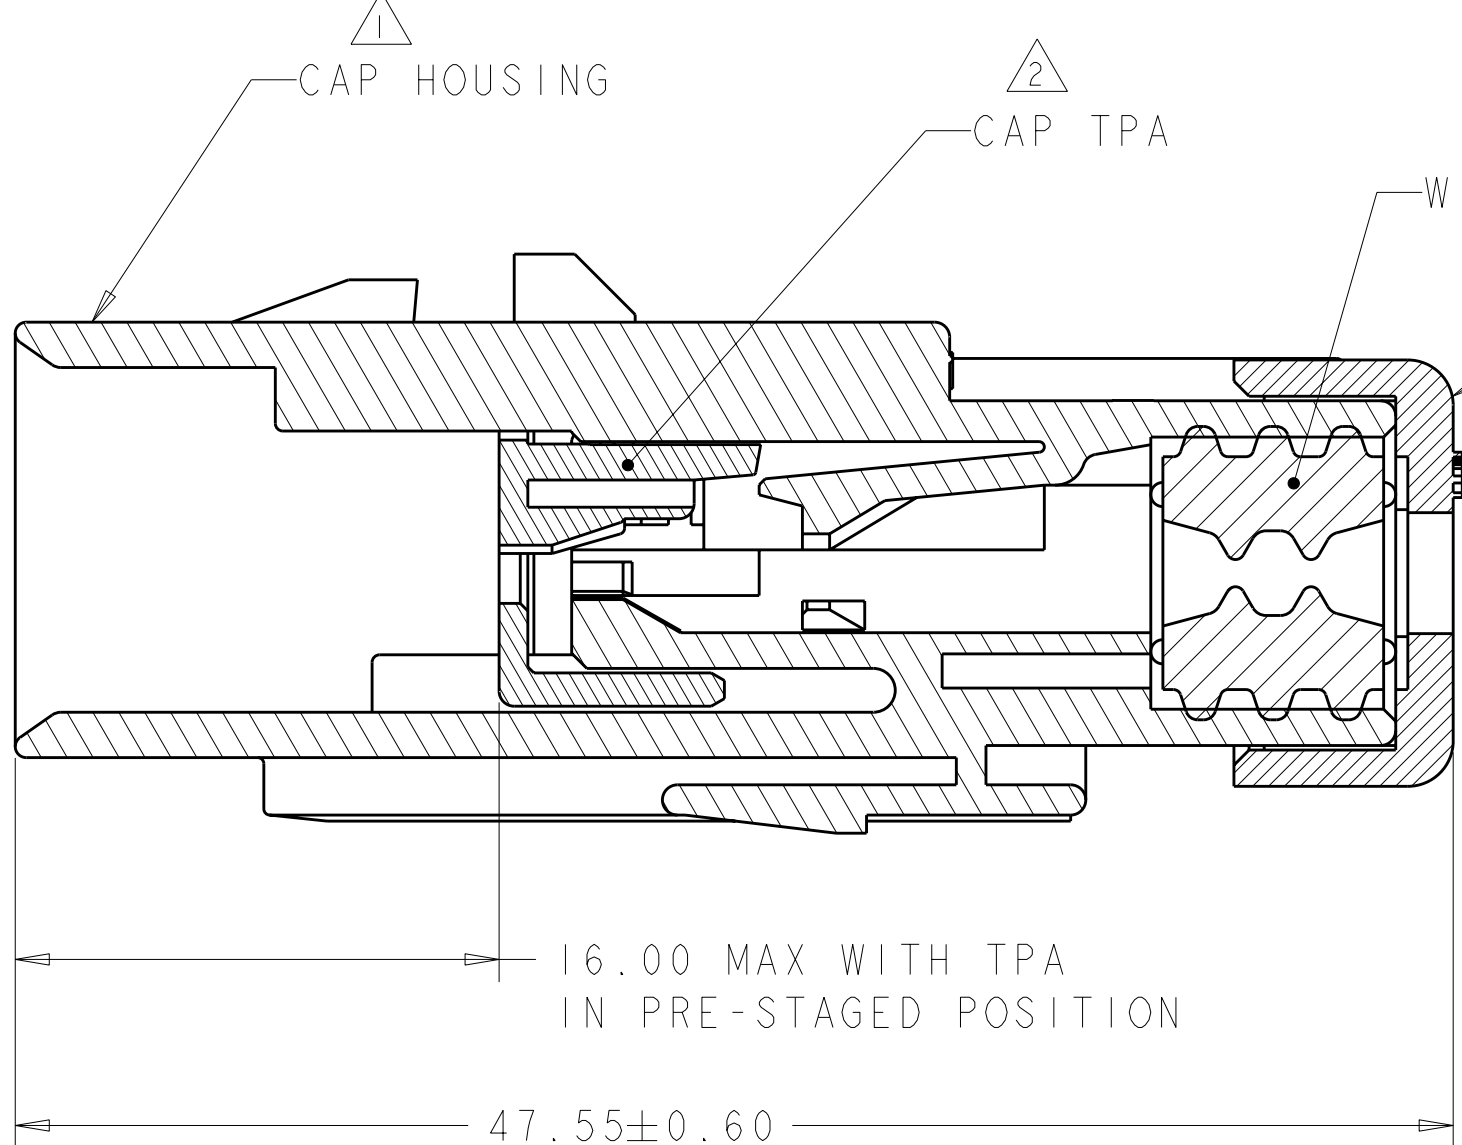

1 CAP HOUSING

2 CAP TPA


3 WIRE SEAL

1 CAP COVER


16.00 MAX WITH TPA
IN PRE-STAGED POSITION

47.55±0.60


SECTION A - A

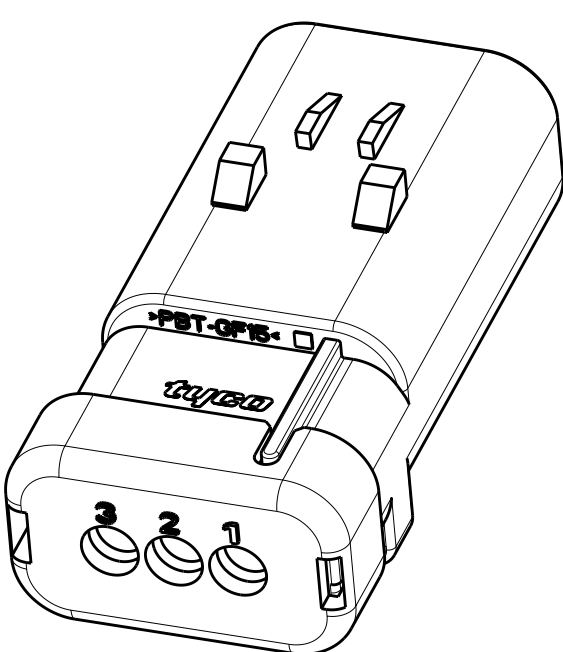

SCALE 2:1



SCALE 2:1

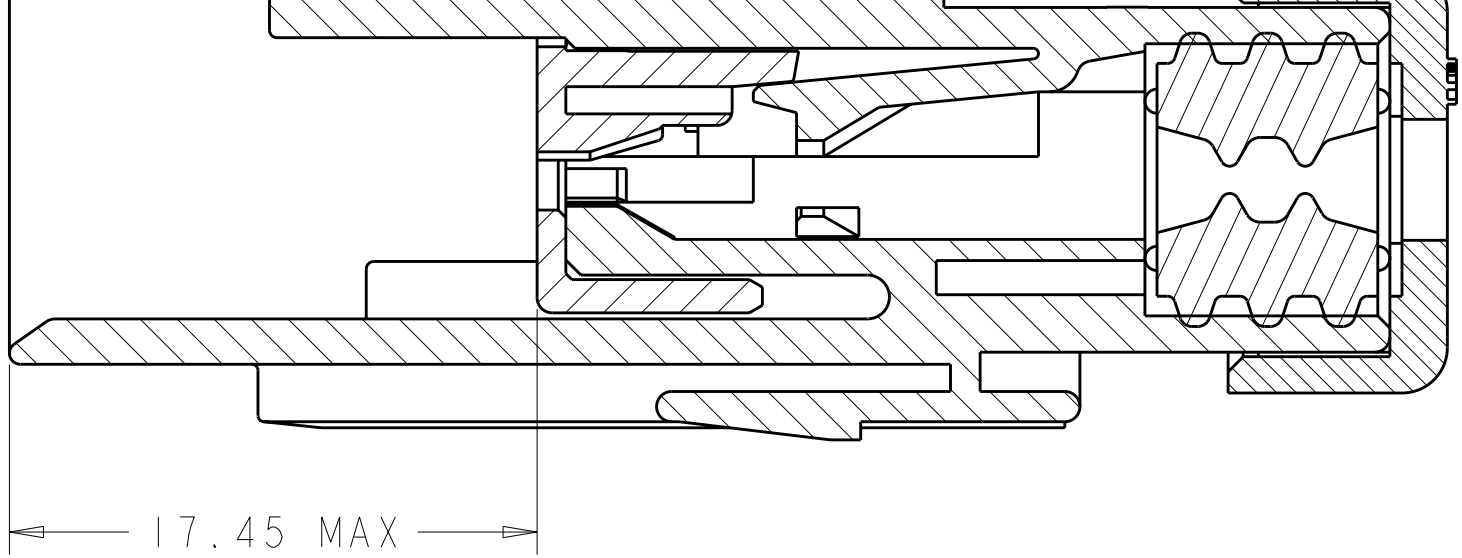

17.45 MAX

SECTION A - A
WITH TPA IN CLOSED POSITION

D	GREEN	776535-4
C	YELLOW	776535-3
B	GRAY	776535-2
A	RED	776535-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Y. PETERSON 22FEB00	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK R. GREINER	NAME CAP ASSEMBLY, 3 POSITION, SINGLE ROW, REDUCED DIA WIRE SEAL AMPSEAL 16	
		APVD M. TRULLI	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL	FINISH	PRODUCT SPEC 108-2184	A200779C-776535	
		APPLICATION SPEC 114-13065	SCALE 4:1 SHEET 1 OF 1 REV B2	
		WEIGHT 10±1g		
		CUSTOMER DRAWING		