
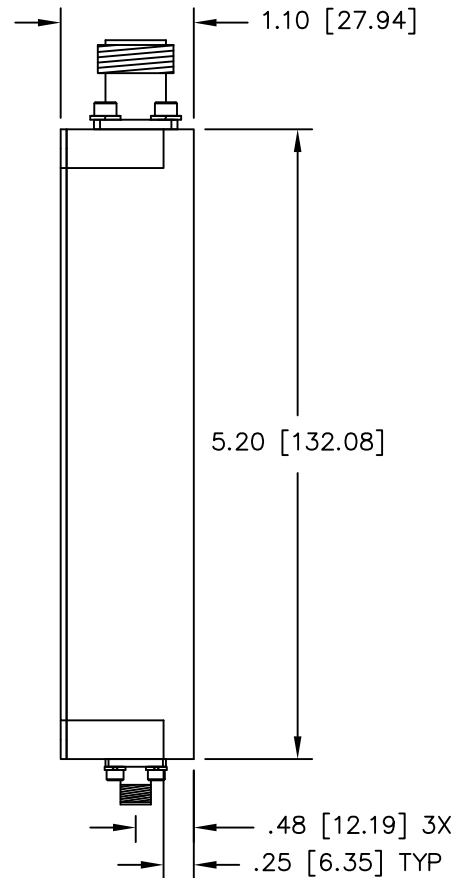


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
5712	A	INITIAL RELEASE	DG	7-15

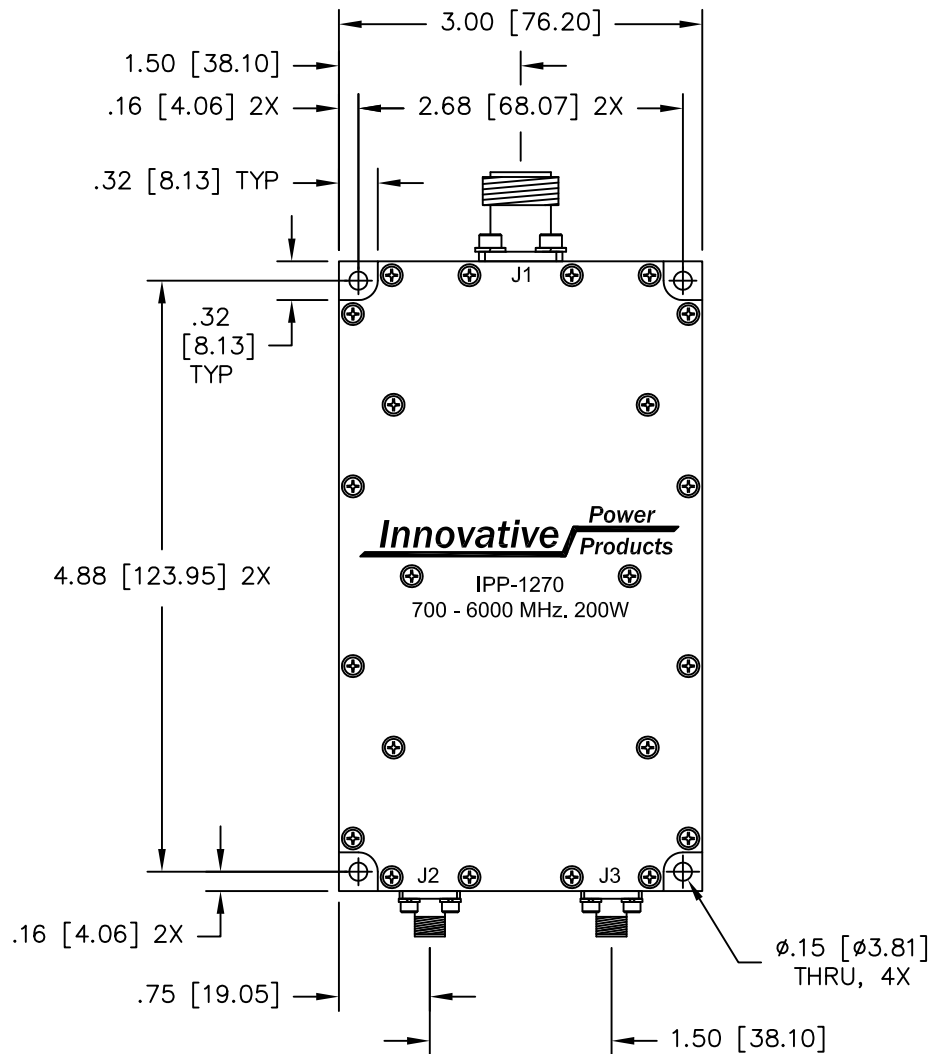

NOTES:

- CONNECTOR TYPE
J1: TYPE 'N' FEMALE
J2 - J3: TYPE 'SMA' FEMALE
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	700 - 6000 MHz.
INSERTION LOSS:	< 0.9 dB
VSWR:	< 1.35:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.3dB
POWER:	200 WATT
ISOLATION:	>8 dB
OPERATING TEMP:	-55°C TO +85°C

MATERIAL	AL. ALLOY 6061-T651	DWN S.Cornell	DATE 6-12-15	Innovative Power Products		
	FINISHELECTRODEPOSITED NICKEL PER QQ-N-290 .0003 MIN.SEMI-BRIGHT	ENG DG	DATE 6-15			
TOLERANCE	.XXX ±.005 .XX ±.02 ANG. ±1/2°	MANUF	DATE	TITLE OUTLINE 2-Way, 700-6000 MHz, 200W		
		CAGE CODE: 437R2		SIZE B	P/N IPP-1270	REV. A
		SHEET 1 OF 1	SCALE 1:1			