



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
8492	B	SEE DAR	DG	1-21
9020	C	SEE DAR	TJD	8-22
9666	D	SEE DAR	DG	4-24

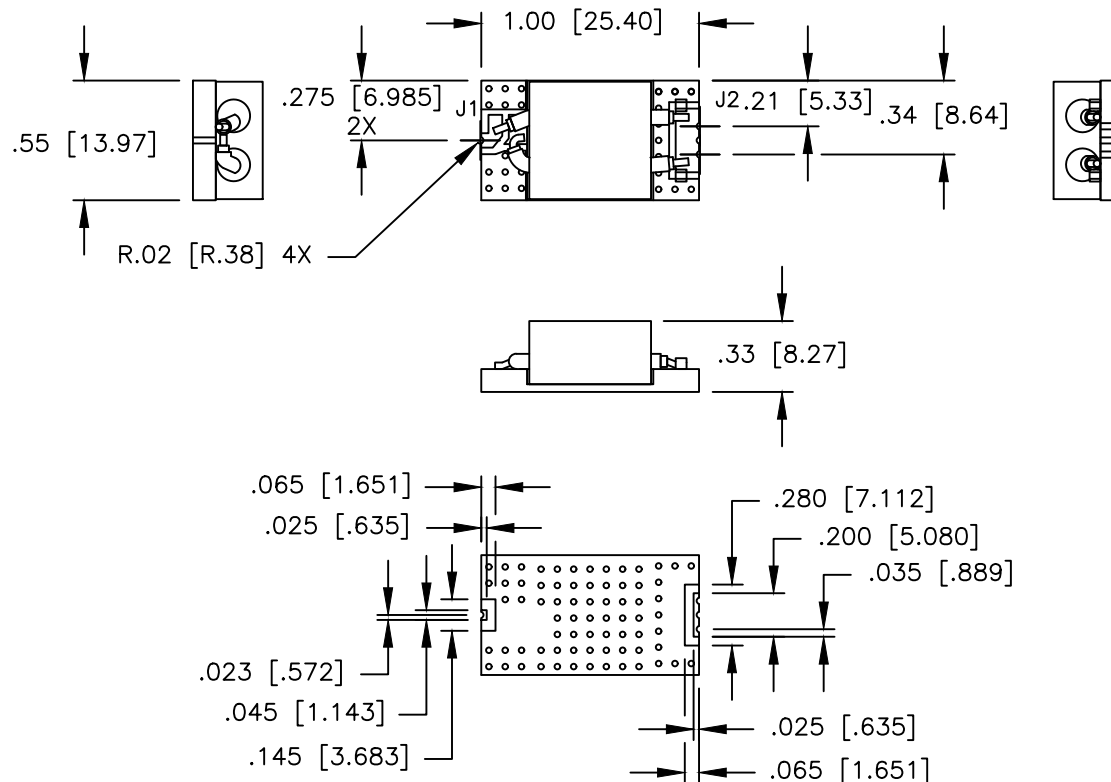

TAPE AND REEL ORIENTATION



DESPOOLING
DIRECTION

NOTES:

- DO NOT EXCEED 250° C WHEN INSTALLING.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	30 - 1000 MHz.
INSERTION LOSS:	30-50 MHz < 0.75 dB 50-1000 MHz < 0.60 dB
VSWR:	< 1.43:1
POWER:	100 WATT
IMPEDANCE:	J1: 50 OHM J2: 12.5 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN S.Cornell	DATE	2-27-18	Innovative ^{Power} _{Products}	
FINISH	ENG DG	DATE	2-18		
IMMERSION TIN	MANUF	DATE		TITLE OUTLINE, SINGLE ENDED IMPEDANCE TRANSFORMER, 30 - 1000 MHz 100 WATT	
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2	DATE			
SHEET 1 OF 1	SCALE	2:1		SIZE B	P/N IPP-5014
					REV. D