

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

# REVISIONS





REV LTR	DATE	ENG	MKTG	Q.A.
A	08/30/06 SH	LC	SD	LJ

## MAXIMUM CHARACTERISTICS DATA (IX-H)

TURN-ON(@10mA):  
+9Vdc  $\pm 10\%$   
UL 497B STRIKE VOLTAGE BREAKDOWN  
(100 Vdc /SEC RISE):  
+8.4 TO +9.6 Vdc  
RESISTANCE:  
 $1\Omega \pm 20\%$   
DATA RATE:  
UP TO 100Mbps  
MAX HOLDING CURRENT:  
400mA @ +20°C  
620mA @ -40°C  
290mA @ +50°C  
235mA @ +65°C

## GENERAL CHARACTERISTICS

SURGE:  
BELLCORE 1089 10/1000 $\mu$ s 100A  
TEMPERATURE:  
-40°C TO +65°C STORAGE/OPERATING  
WIRE RANGE:  
16 TO 28 AWG.  
CORD DIAMETER:  
0.114 TO 0.225 INCH W/ SMALL GROMMET  
0.250 TO 0.350 INCH W/ LARGE GROMMET  
APPLICATION:  
PANEL MOUNT.  
WEATHERIZED AFTER PROPER INSTALLATION OF  
GROMMETS AND TORQUING OF LID.  
ENVIRONMENTAL:  
MEETS BELLCORE #TA-NWT-000487 PROCEDURE 4.11,  
WIND DRIVEN RAIN (70MPH) RAIN INTRUSION TEST.

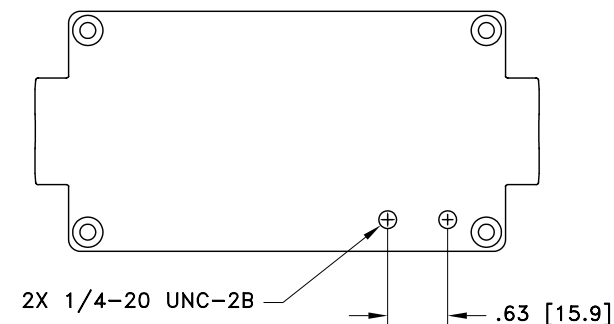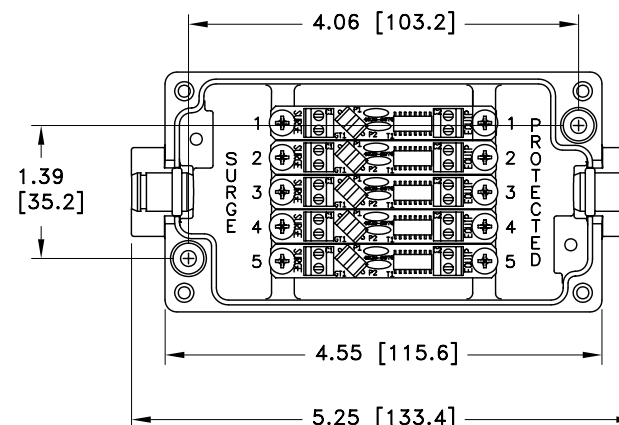


CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

## NOTES:

- TORQUE 4X M4-20mm LID SCREWS TO 11lbf-in MINIMUM.
- ENSURE THAT ALL GROMMETS ARE PROPERLY SEATED FOR ENVIRONMENTAL SPECIFICATIONS.

DRAFTER R. SWART	DATE 08/08/05	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-5H CUSTOMER PRINT			
MECH ENGINEER R. DUNNING	DATE 08/09/05				
ELEC ENGINEER L. CHANG	DATE 08/09/05				
MARKETING S. DOTTER	DATE 08/09/05				
QUALITY DEPT L. JACQUES	DATE 08/09/05	CAGE CODE 61114	FILE NAME -C1	SCALE NOTED	SHEET 1 OF 1