

DATASHEET

N(F) to N(F) 4 Hole Adapter

Product Name

1. NF4H-NF-001





N(F) to N(F) 4 Hole Adapter

Document No.	CRD-DS-2235-01
Date / Rev.	25.May.2023 / 1
Confidential level	N/A

1. Product

1-1. N(F) to N(F) 4 Hole Adapter

(P/N : NF4H-NF-001)

2. Specifications

2-1. Material

Body : Stainless Steel, Passivated

Center Conductor : BeCu, Au Plated

Insulator : PEI

2-2. Environmental

Operating Temperature : -50°C to 135°C

2-3. Electrical

Impedance : 50Ω Typ.

Operating Freq. : DC to 18GHz

VSWR : 1.20 : 1 @18GHz Typ.

1.30 : 1 @18GHz Max.

Insertion Loss : -0.07dBx $\sqrt{f}$

RF Leakage : -100dB




Document No.	CRD-DS-2235-01
Date / Rev.	25.May.2023 / 1
Confidential level	N/A

3. Drawing

3-1. N(F) to N(F) 4 Hole Adapter

(P/N : NF4H-NF-001)

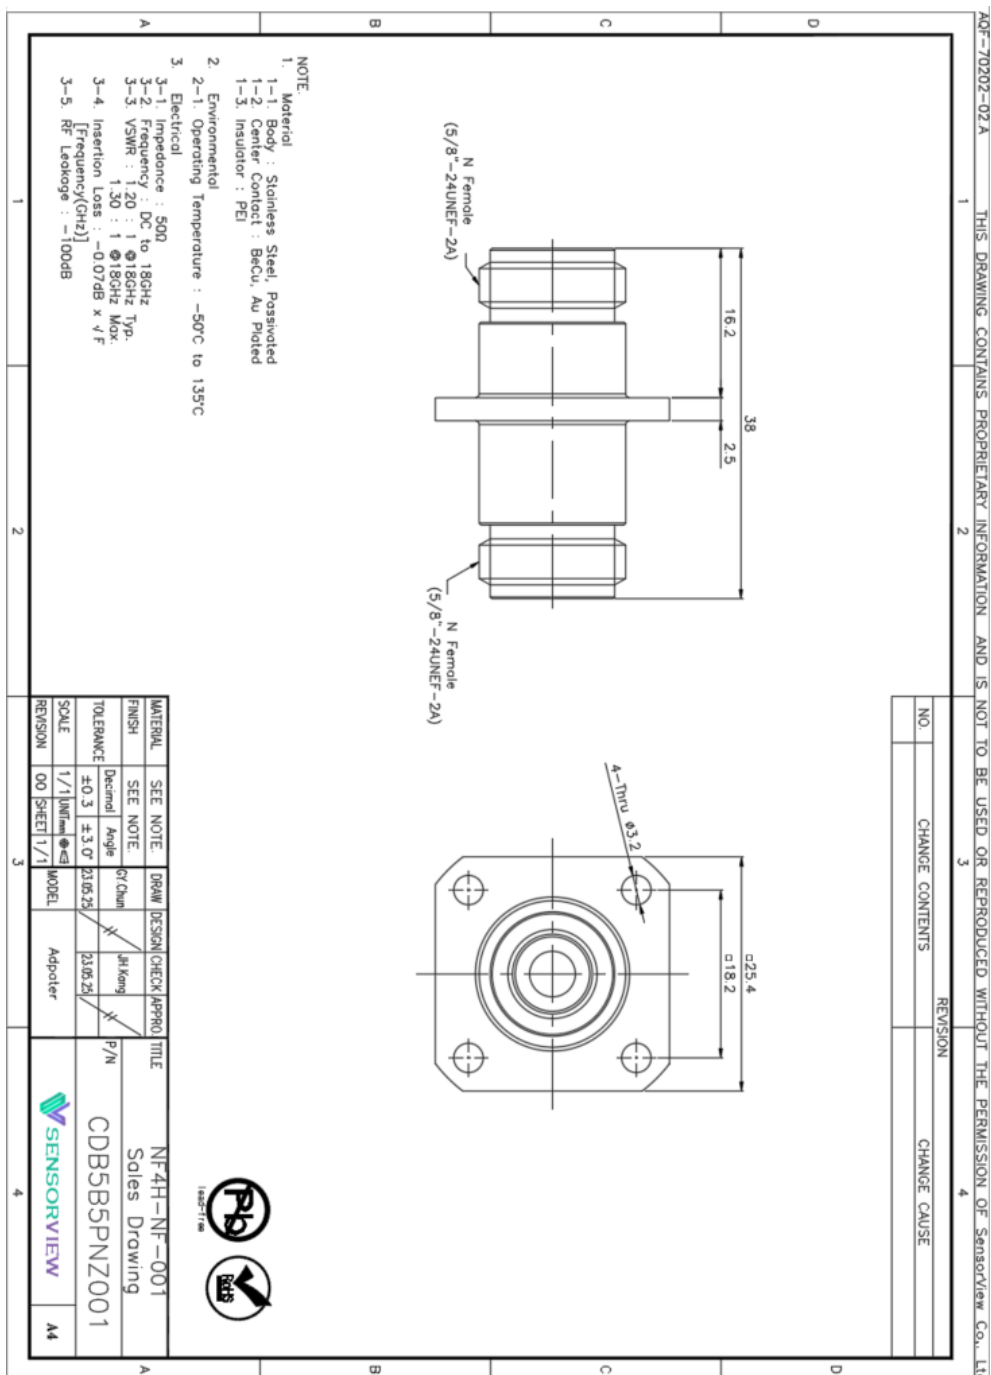



N(F) to N(F) 4 Hole Adapter

Document No.

CRD-DS-2235-01

Date / Rev.

25.May.2023 / 1

Confidential level

N/A

4. Data

4-1. N(F) to N(F) 4 Hole Adapter (P/N : NF4H-NF-001)

