

# DATASHEET

## N(F) to N(F) Bulk Head Adapter

### Product Name

1. NFBH-NF-003





# N(F) to N(F) Bulk Head Adapter

|                    |                 |
|--------------------|-----------------|
| Document No.       | CRD-DS-2251-09  |
| Date / Rev.        | 01.Jun.2023 / 1 |
| Confidential level | N/A             |

## 1. Product

### 1-1. N(F) to N(F) Bulk Head Adapter

(P/N : NFBH-NF-003)

## 2. Specifications

### 2-1. Material

Body : Stainless Steel, Passivated

Center Conductor : BeCu, Au Plated

Insulator : PEI

### 2-2. Environmental

Operating Temperature : -50°C to 135°C

### 2-2. Electrical

Impedance : 50Ω Typ.

Operating Freq. : DC to 18GHz

VSWR : 1.15 : 1 @18GHz Typ.

1.20 : 1 @18GHz Max.

Insertion Loss : -0.07dB x  $\sqrt{f}$

RF Leakage : -100dB




# N(F) to N(F) Bulk Head Adapter

|                    |                 |
|--------------------|-----------------|
| Document No.       | CRD-DS-2251-09  |
| Date / Rev.        | 01.Jun.2023 / 1 |
| Confidential level | N/A             |

## 3. Drawing

### 3-1. N(F) to N(F) Bulk Head Adapter

(P/N : NFBH-NF-003)

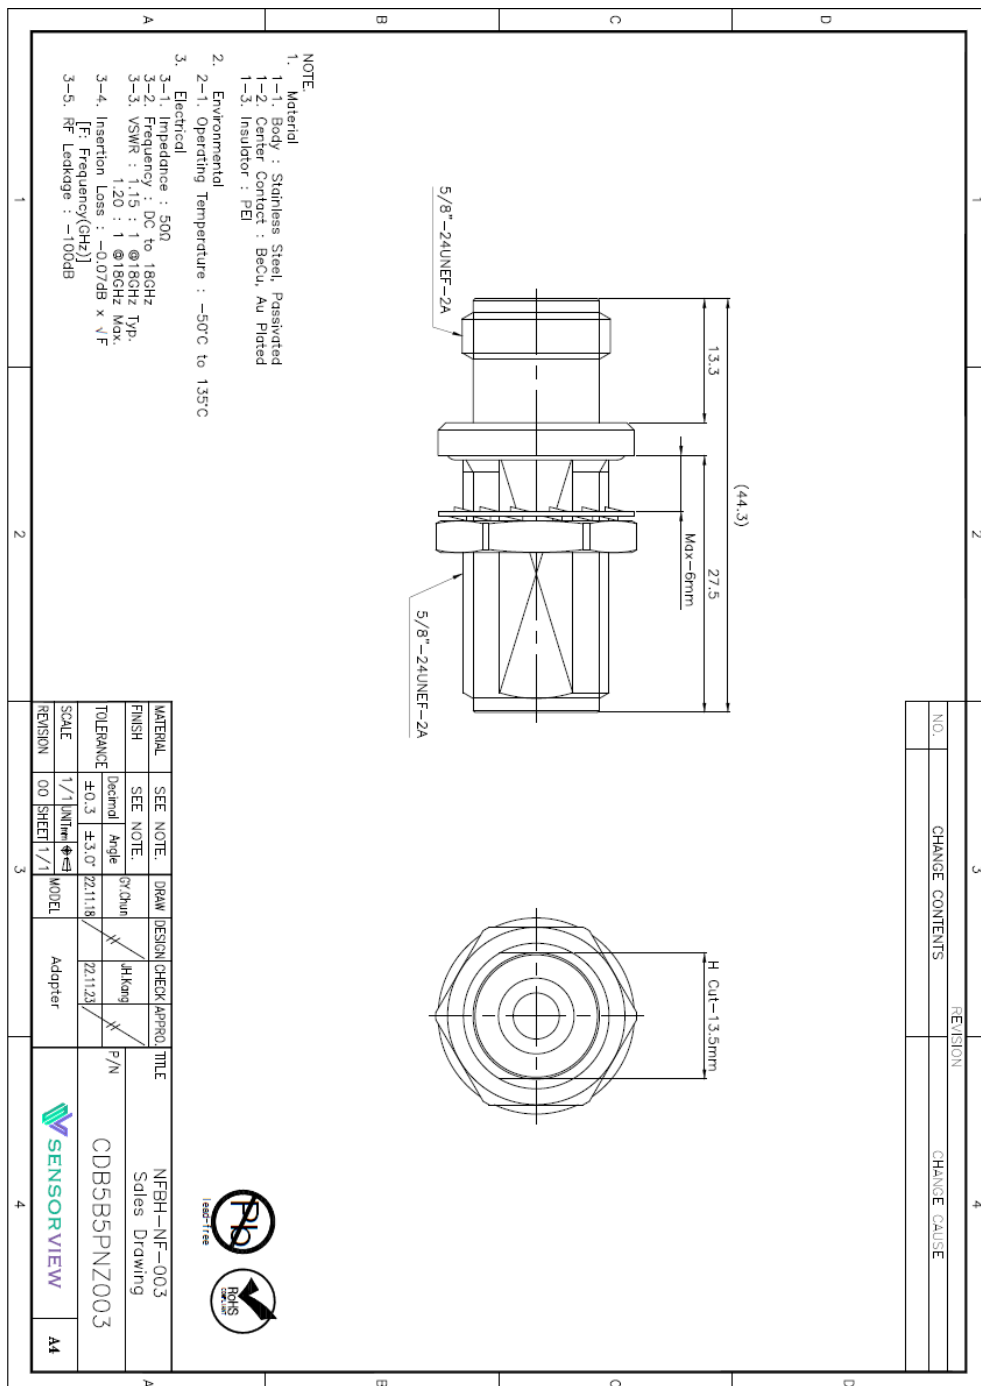



# N(F) to N(F) Bulk Head Adapter

|                    |                 |
|--------------------|-----------------|
| Document No.       | CRD-DS-2251-09  |
| Date / Rev.        | 01.Jun.2023 / 1 |
| Confidential level | N/A             |

## 4. Data

### 4-1. N(F) to N(F) Bulk Head Adapter

(P/N : NFBH-NF-003)

