

ignion<sup>™</sup>


Your innovation.  
Accelerated.

# OMNIA mXTEND<sup>™</sup> (NN03-410)

DATASHEET

## OMNIA mXTEND<sup>™</sup>: A STANDARD ANTENNA SOLUTION FOR MOBILE FREQUENCY BANDS.

The OMNIA mXTEND<sup>™</sup> chip antenna component is engineered to provide high-performance multiband coverage in wireless devices, supporting a wide array of communication standards across Cellular, GNSS, and Wi-Fi/BLE technologies. This versatile antenna solution allows for seamless integration into devices that require robust, multi-frequency operation while minimizing design complexity.

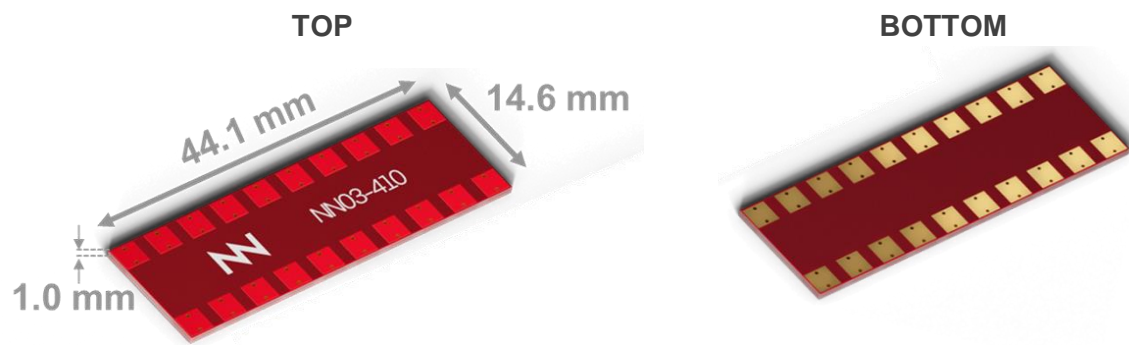

**Material:** The OMNIA mXTEND<sup>™</sup> chip antenna component is built on glass epoxy substrate.

### Most used industries.

- Smart Metering
- Industrial IoT
- Automotive Telematics
- Asset Tracking & Logistics

### OMNIA mXTEND<sup>™</sup> benefits.

- **High Performance:** Provides reliable and consistent signal strength across Cellular, GNSS, and Wi-Fi/BLE, ensuring robust connectivity even in challenging environments.
- **Multiband:** Supports a broad range of frequencies, ensuring global compatibility for mobile, location-based, and data transmission services.
- **Simplified Integration:** A single antenna part with a triple-port configuration reduces the need for multiple components, simplifying your design and lowering costs.
- **Reliability:** An off-the-shelf standard product that requires no customization, allowing for quicker deployment and reduced time-to-market.

### Operation bands summary.

The OMNIA mXTEND<sup>™</sup> SMD antenna component covers a broad spectrum of frequencies, ensuring comprehensive support for Cellular Networks (4G, 5G, NB-IoT, LTE-M), GNSS Systems (GPS, GLONASS, Galileo, BeiDou), and Wi-Fi/BLE and many more within the range of 400 MHz to 8000 MHz.

## 1 AVAILABLE CONFIGURATIONS SUMMARY

| Configuration                          | Frequency range                                  | Frequency regions |
|--|--|-------------------|
| <u>CELLULAR IoT + GNSS + Wi-Fi/BLE</u> | 790 – 960 MHz, 1561 – 1606 MHz & 2400 – 2500 MHz | 3                 |

**Table 1** - List of available configurations included in the datasheet.


## 2 DETAILED AVAILABLE CONFIGURATIONS

### 2.1 CELLULAR IoT + GNSS + Wi-Fi/BLE CONFIGURATION

| Technical Features | 790 – 960 MHz   | 1561 – 1606 MHz | 2400 – 2500 MHz |
|--------------------|-----------------|-----------------|-----------------|
| Average Efficiency | > 55 %          | > 75 %          | > 65 %          |
| Peak Gain          | 0.9 dBi         | 4.0 dBi         | 3.5 dBi         |
| VSWR               | < 2.6:1         | < 1.5:1         | < 2:1           |
| Radiation Pattern  | Omnidirectional |                 |                 |
| Polarization       | Linear          |                 |                 |
| Weight (approx.)   | 1.23 g          |                 |                 |
| Temperature        | -40 to +125 °C  |                 |                 |
| Impedance          | 50 Ω            |                 |                 |

**Table 2** – Technical features. Measures from the evaluation board (100 mm x 69 mm x 1 mm).

## ANTENNA FOOTPRINT: 3 PORT CONFIGURATION

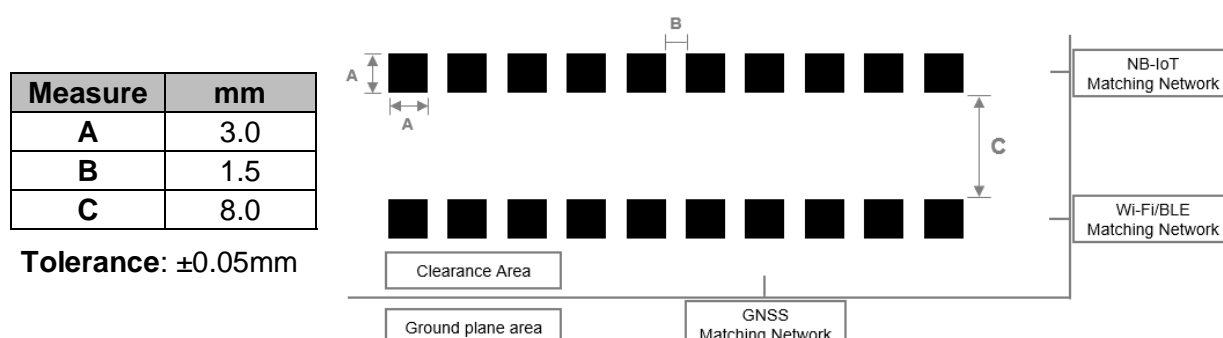

**Table 3** – Footprint dimensions related to the 3-port solution.

If you are designing a device with a different size or operating frequency than shown above, you can assess the performance of this configuration using our free-of-charge [Oxion<sup>™</sup>](#) platform. This platform provides a complete design report, including expected performance and tailored design guide, within 24 hours. For additional information about Ignion's range of R&D services, please visit: <https://ignion.io/resources-support/technical-center/engineering-support/>. If you require further assistance, please contact [support@ignion.io](mailto:support@ignion.io).

Purchase this or other evaluation boards through our main distributors by visiting the following link: <https://ignion.io/distributors/>.

ignion<sup>N</sup>

Your innovation.  
Accelerated.

Contact:  
[support@ignion.io](mailto:support@ignion.io)  
+34 935 660 710