
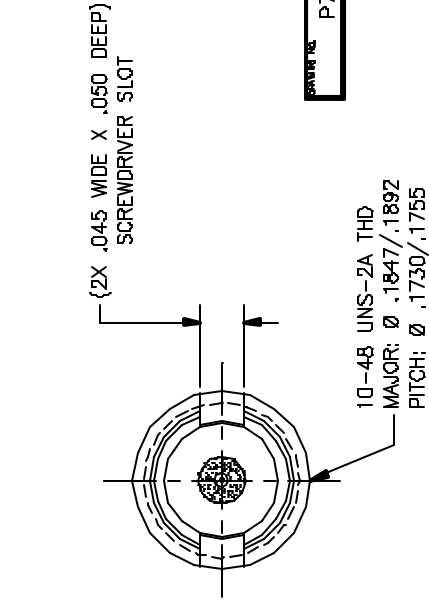


P/N	APPLICABLE NOTE(S)	Ø A	INTERFACE(S)
-10C	1,2,3	(.120)	LIMITED DETENT
-20C	1,2,3	(.116)	FULL DETENT

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
-	A	ECO 11598	05/17/00
-	B	ECO 18112	04/22/05
-	C	ECO 18171	05/04/05
-	P	MAQ	

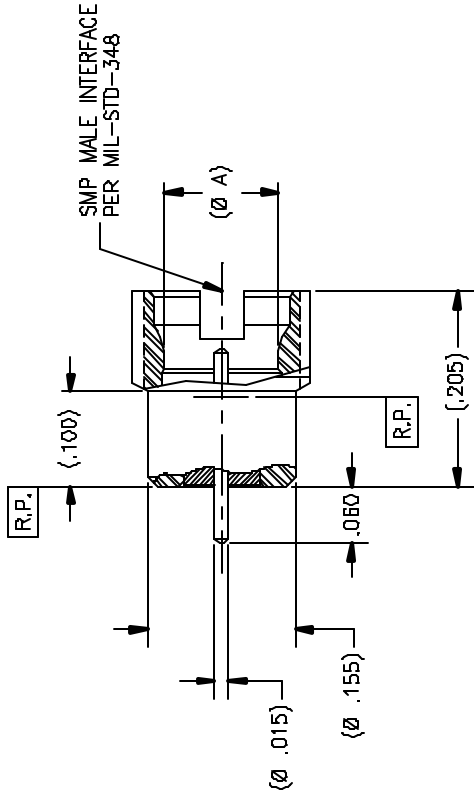

DATE: P761

NOTE(S):

- MATERIAL(S):
 - BODY 303 SST PER ASTM A-582.
 - CENTER CONDUCTOR: KOVAR PER ASTM F-15.
 - GLASS: CORNING 7070.
 - INSULATOR: TORLON PER MIL-P-46179.
- FINISH(ES):
 - BODY AND CENTER CONDUCTOR:
 - GOLD PLATE PER ASTM B-488, TYPE 1, GRADE A, .00050/.00100 THICK OVER NICKEL PER QQ-N-290, CLASS 1, .000050/.000100 THICK.
 - GLASS (FORM & COLOR): OPTIONAL.
 - INSULATOR: NONE.
- ELECTRICAL PERFORMANCE(S):
 - NOMINAL IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: DC TO 26.0 GHz.
 - VSWR: 1.35:1 MAX TO 26.0 GHz.
 - INSERTION LOSS: 0.1 dB DC TO 12.0 GHz.
0.2 dB MAX TO 26.0 GHz.

APPLICABLE TENSQITE DOCUMENTS			
WORK STD	FRIED. NIT	ASSY. NIT	
NA	NA	NA	
TOLERANCES AND NOTES EXCEPT AS NOTED			
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/32 DECIMALS ± .005 ANGLES ± 1/2° HOLE FINISH 125 R/A 1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE NET EXCEPT WHERE SHOWN OTHERWISE 2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 5. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 6. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 7. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 8. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 9. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 10. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 11. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 12. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 13. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 14. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE 15. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE TO BE TO THE CENTER OF THE HOLE			
TENSQITE			
SEE NOTE(S)			
SIZE			
REVISION			
HIGH PERFORMANCE TABLES			
Lotto Beach, California 90015			
TITLE			
SMP MALE HERMETIC SEAL-THREAD-IN			
PANEL MOUNT TO STRAIGHT TERMINATION			
SCALE			
10:1			
SHEET 1 OF 1			
DRAWING NO.			
P761			