



P/N		SMP INTERFACE (Ø A)	
-10CSF	LIMITED DETENT	.120	
-20CSF	SMOOTH BORE	.125	
-30CSF	FULL DETENT	.116	

REV		DESCRIPTION		DATE		BY	
-	C	ECO	11569	05/22/08		IMG	
-	D	ECO	12057	08.02.00		DKN	
-	E	ECO	12443	10.30.00		IMG	

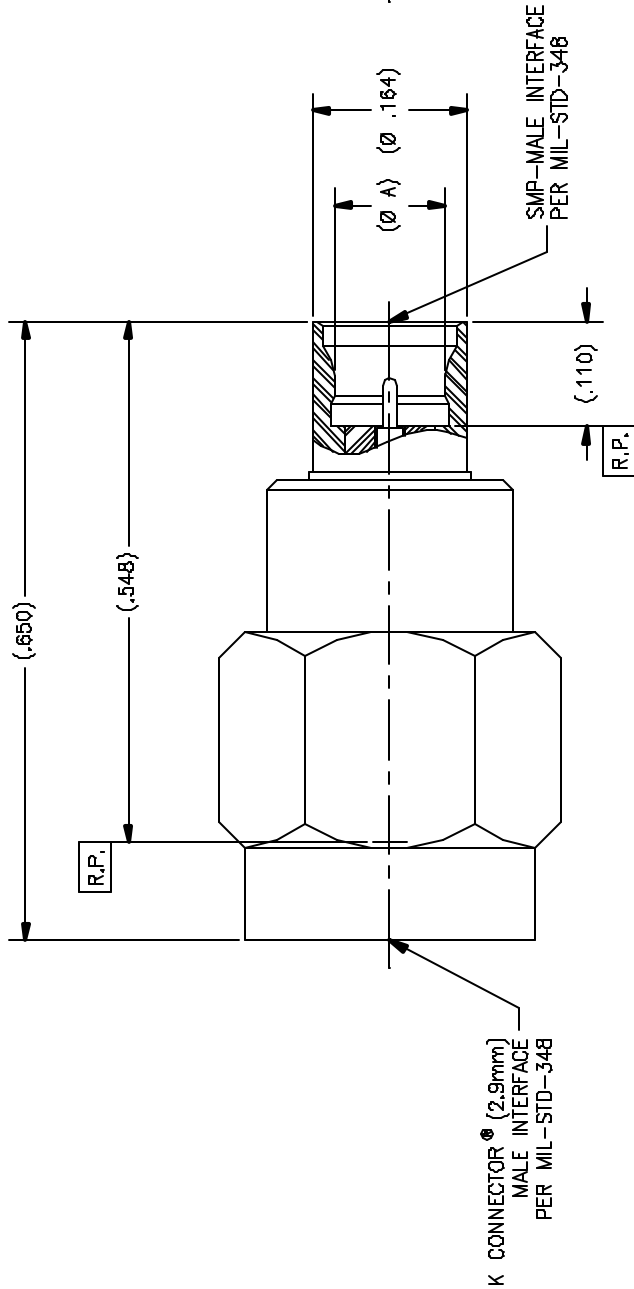

FORMING NO.	P902	REV.	E
-------------	------	------	---



NOTE(S):

- MATERIAL(S):
 - BODY (SMP & K CONNECTOR®) & COUPLING NUT: 303 SST PER ASTM A-582
 - CONTACT & RETAINING RING: BeCu ALLOY PER ASTM B-196
 - GASKET: SILICONE RUBBER PER ZZ-R-765
 - BEAD: (PROPRIETARY-HIGH TEMP. APP.)
 - INSULATOR: PTFE PER ASTM D-1710
- FINISH(ES):
 - BODY & COUPLING NUT: PASSIVATE PER ASTM A-967
 - CONTACT: GOLD PLATE PER ASTM B-488 OVER NICKEL UNDERPLATE PER QQ-N-290
 - GASKET, RETAINING RING, BEAD & INSULATOR: NONE
- ELECTRICAL PERFORMANCE:
 - FREQUENCY RANGE: DC-40 GHz
 - R.F. INSERTION LOSS: 0.5 dB MAX TO 40 GHz
 - VSWR: 1.7:1 MAX TO 40 GHz

K CONNECTOR® IS A REGISTERED TRADEMARK OF ANRITSU COMPANY

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE SPECIFIED	
1.	MAXIMUM FINISH	Ø / .005	AS	1.	MAXIMUM FINISH
2.	MAXIMUM PLATE	0.005	MAX	2.	MAXIMUM PLATE
3.	MAXIMUM UNDERPLATE	0.005	MAX	3.	MAXIMUM UNDERPLATE
4.	MAXIMUM BEAD	0.005	MAX	4.	MAXIMUM BEAD
5.	MAXIMUM GASKET	0.005	MAX	5.	MAXIMUM GASKET
6.	MAXIMUM RETAINING RING	0.005	MAX	6.	MAXIMUM RETAINING RING
7.	MAXIMUM INSULATOR	0.005	MAX	7.	MAXIMUM INSULATOR
8.	MAXIMUM COUPLING NUT	0.005	MAX	8.	MAXIMUM COUPLING NUT
9.	MAXIMUM BODY	0.005	MAX	9.	MAXIMUM BODY
10.	MAXIMUM CONTACT	0.005	MAX	10.	MAXIMUM CONTACT

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE SPECIFIED	
1.	MAXIMUM FINISH	Ø / .005	AS	1.	MAXIMUM FINISH
2.	MAXIMUM PLATE	0.005	MAX	2.	MAXIMUM PLATE
3.	MAXIMUM UNDERPLATE	0.005	MAX	3.	MAXIMUM UNDERPLATE
4.	MAXIMUM BEAD	0.005	MAX	4.	MAXIMUM BEAD
5.	MAXIMUM GASKET	0.005	MAX	5.	MAXIMUM GASKET
6.	MAXIMUM RETAINING RING	0.005	MAX	6.	MAXIMUM RETAINING RING
7.	MAXIMUM INSULATOR	0.005	MAX	7.	MAXIMUM INSULATOR
8.	MAXIMUM COUPLING NUT	0.005	MAX	8.	MAXIMUM COUPLING NUT
9.	MAXIMUM BODY	0.005	MAX	9.	MAXIMUM BODY
10.	MAXIMUM CONTACT	0.005	MAX	10.	MAXIMUM CONTACT

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE SPECIFIED	
1.	MAXIMUM FINISH	Ø / .005	AS	1.	MAXIMUM FINISH
2.	MAXIMUM PLATE	0.005	MAX	2.	MAXIMUM PLATE
3.	MAXIMUM UNDERPLATE	0.005	MAX	3.	MAXIMUM UNDERPLATE
4.	MAXIMUM BEAD	0.005	MAX	4.	MAXIMUM BEAD
5.	MAXIMUM GASKET	0.005	MAX	5.	MAXIMUM GASKET
6.	MAXIMUM RETAINING RING	0.005	MAX	6.	MAXIMUM RETAINING RING
7.	MAXIMUM INSULATOR	0.005	MAX	7.	MAXIMUM INSULATOR
8.	MAXIMUM COUPLING NUT	0.005	MAX	8.	MAXIMUM COUPLING NUT
9.	MAXIMUM BODY	0.005	MAX	9.	MAXIMUM BODY
10.	MAXIMUM CONTACT	0.005	MAX	10.	MAXIMUM CONTACT

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE SPECIFIED	
1.	MAXIMUM FINISH	Ø / .005	AS	1.	MAXIMUM FINISH
2.	MAXIMUM PLATE	0.005	MAX	2.	MAXIMUM PLATE
3.	MAXIMUM UNDERPLATE	0.005	MAX	3.	MAXIMUM UNDERPLATE
4.	MAXIMUM BEAD	0.005	MAX	4.	MAXIMUM BEAD
5.	MAXIMUM GASKET	0.005	MAX	5.	MAXIMUM GASKET
6.	MAXIMUM RETAINING RING	0.005	MAX	6.	MAXIMUM RETAINING RING
7.	MAXIMUM INSULATOR	0.005	MAX	7.	MAXIMUM INSULATOR
8.	MAXIMUM COUPLING NUT	0.005	MAX	8.	MAXIMUM COUPLING NUT
9.	MAXIMUM BODY	0.005	MAX	9.	MAXIMUM BODY
10.	MAXIMUM CONTACT	0.005	MAX	10.	MAXIMUM CONTACT

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE SPECIFIED	
1.	MAXIMUM FINISH	Ø / .005	AS	1.	MAXIMUM FINISH
2.	MAXIMUM PLATE	0.005	MAX	2.	MAXIMUM PLATE
3.	MAXIMUM UNDERPLATE	0.005	MAX	3.	MAXIMUM UNDERPLATE
4.	MAXIMUM BEAD	0.005	MAX	4.	MAXIMUM BEAD
5.	MAXIMUM GASKET	0.005	MAX	5.	MAXIMUM GASKET
6.	MAXIMUM RETAINING RING	0.005	MAX	6.	MAXIMUM RETAINING RING
7.	MAXIMUM INSULATOR	0.005	MAX	7.	MAXIMUM INSULATOR
8.	MAXIMUM COUPLING NUT	0.005	MAX	8.	MAXIMUM COUPLING NUT
9.	MAXIMUM BODY	0.005	MAX	9.	MAXIMUM BODY
10.	MAXIMUM CONTACT	0.005	MAX	10.	MAXIMUM CONTACT