



P/N	APPLICABLE NOTE(S)	INTERFACE(S)	(Ø A)	REVISIONS		
				ZONE	REV	DATE
-10CCSF	1,2,3	FULL DETENT	.116	-	E	EC0 12057
-20CCSF	1,2,3	LIMITED DETENT	.120	-	F	EC0 12641
-30CCSF	1,2,3	SMOOTH BORE	.125	-	G	EC0 13309
				-	G	05.08.01
				-	ACS	

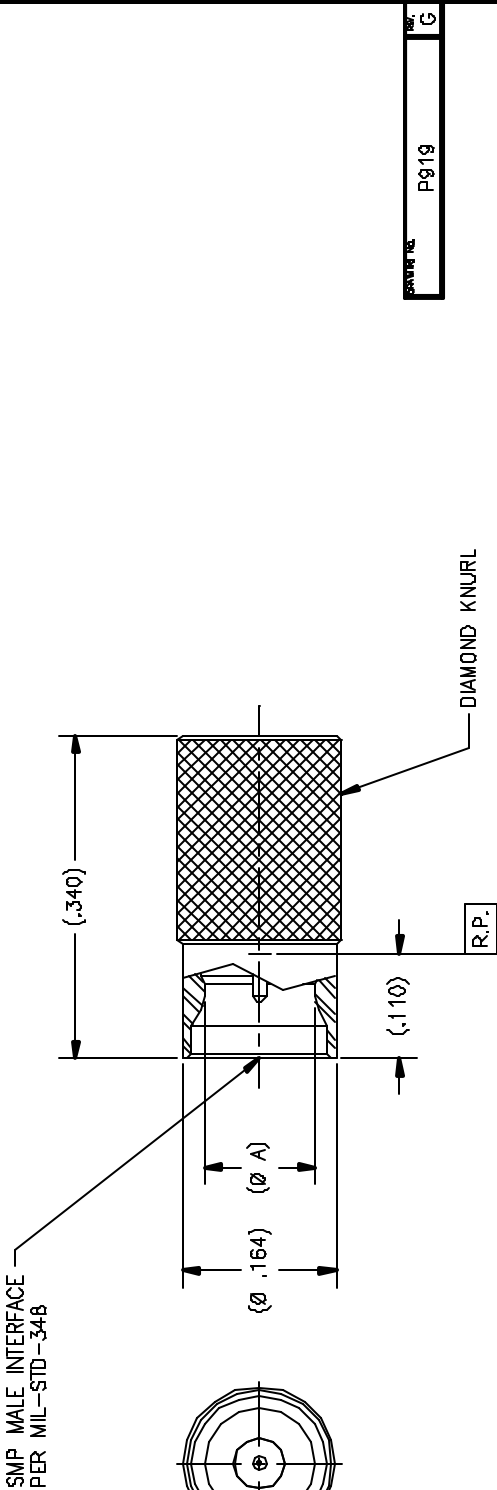

- NOTE(S):
- MATERIAL(S):
 - BODY: 303 SST PER ASTM A-582.
 - INSERT: BRASS ALLOY PER ASTM B-16
 - CONTACT: BeCu ALLOY PER ASTM B-196.
 - INSULATOR: TEFLON PER ASTM D-1710
 - EPOXY: SIGMA VF TYPE HV.
 - FINISHE(S):
 - BODY: PASSIVATE PER ASTM A-967
 - INSERT & CONTACT: GOLD PLATE PER ASTM B-488
OVER NICKEL PLATE PER AMS-QQ-N-280.
 - EPOXY & INSULATOR: NONE
 - ELECTRICAL PERFORMANCES:
 - FREQUENCY RANGE: DC-18GHz
 - VSWR: 1.20:1 MAX DC-15GHz
1.25:1 MAX TO 18GHz
 - POWER HANDLING: 20 dBm MAX



APPLICABLE TENSQITE DOCUMENTS				TOLERANCES AND NOTES EXCEPT AS NOTED				SEE NOTE(S)			
WORK STD	FRID. NET	ASSY. NET		DIMENSIONS ARE IN INCHES	UNLESS OTHERWISE SPECIFIED	TEST PART	TEST PART	SIZE	PRECISION	REQUIREMENT	
NA	NA	NA	NA	LINEAR .0015 MAX	ANGULAR ± 1/2°						
				RADIUS ± 1/32							
				1. MACHINE FINISH: 63/100							
				2. BREAK ALL SHARP EDGES AND ROUNDS							
				3. MACHINED SURFACES: 0.005 MAX SURFACE FINISH							
				4. MACHINED SURFACES: 0.005 MAX SURFACE FINISH							
				5. MACHINED SURFACES: 0.005 MAX SURFACE FINISH							
				6. MACHINED SURFACES: 0.005 MAX SURFACE FINISH							
				7. DIMENSIONS TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				8. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				9. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				10. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				11. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				12. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							
				13. TOLERANCES TO BE MET EXCEPT WHERE SHOWN OTHERWISE							

NOTICE

THIS DRAWING IS THE PROPERTY OF TENSQITE, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TENSQITE, INC. ANY UNAUTHORIZED REPRODUCTION OR TRANSMISSION OF THIS DRAWING IS PROHIBITED AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.

Tensqite

HIGH PERFORMANCE CABLES
& INTERCONNECT SYSTEMS
Little Beach, California 90615

TITLE SMP MALE STRAIGHT 50 OHMS
LOAD TERMINATION

SCALE 10/1

SIZE 10/1

DATE 05.14.01

BY

CHKD BY

APP'D BY

SIZE C 50990

WORKING NO. P919

REV. G