
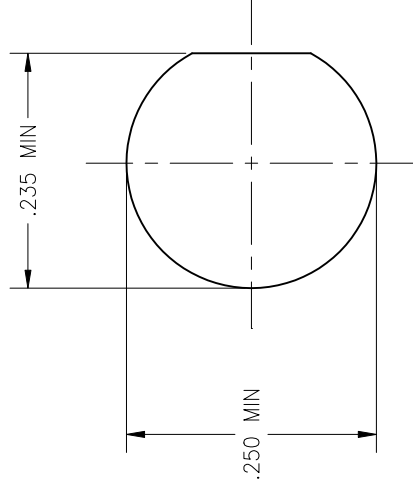
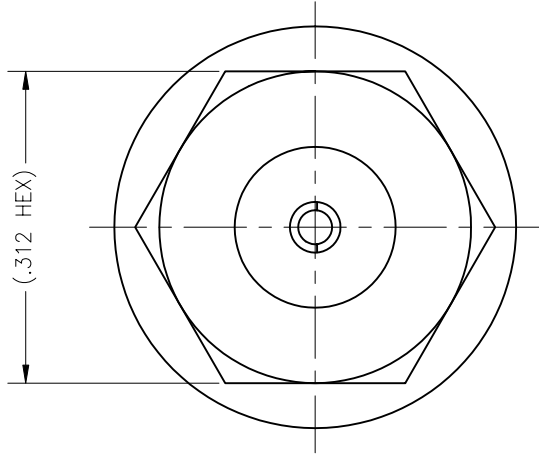


P/N	APPLICABLE NOTE(S)
CC	1,2
CCSF	1,2
CCCE	1,2
CCNP	1,2

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
—	—	—	—
—	—	—	—
—	—	—	—

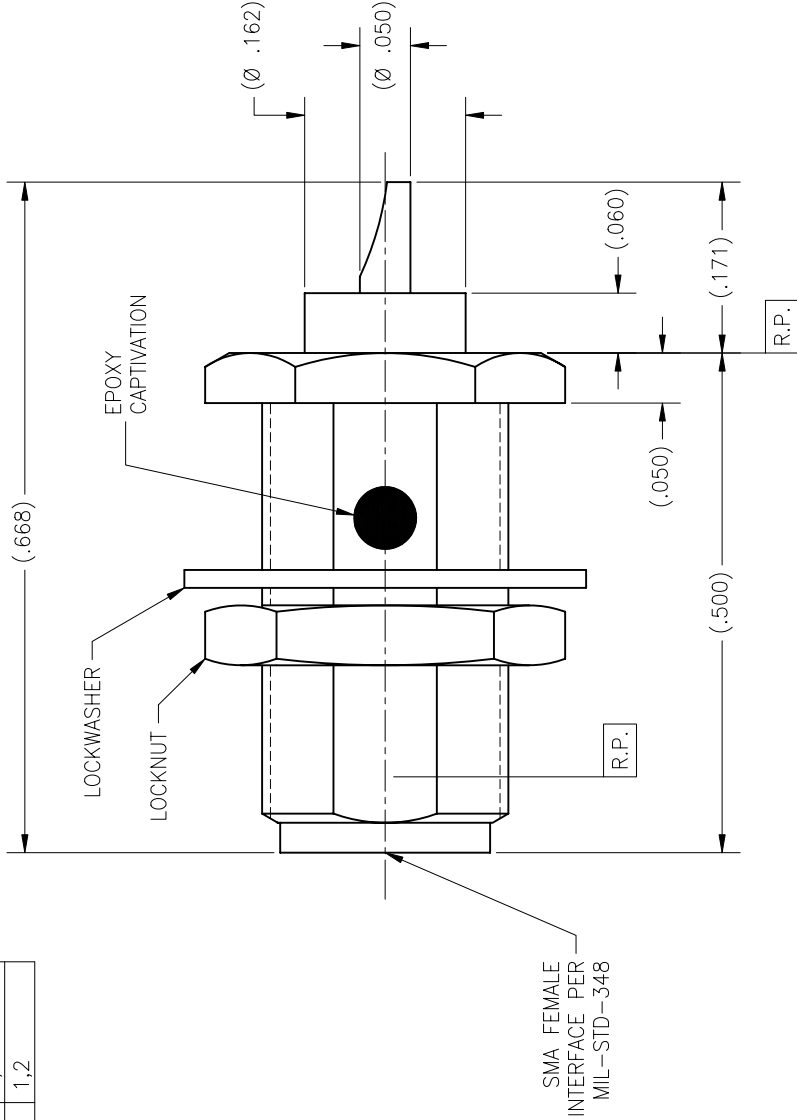

RECOMMENDED
MOUNTING HOLE

NOTE(S):

1. MATERIALS:
 - 1.1 BODY & LOCKNUT: 303 SST PER ASTM A-582.
 - 1.2 INSULATOR: PTFE PER ASTM D-1710
 - 1.3 LOCKWASHER: 410 SST PER ASTM B-139.
 - 1.4 CENTER CONDUCTOR: BeCu ALLOY C173 PER ASTM B-196.
 - 1.5 EPOXY: SIGMA VF TYPE HV
2. FINISH(ES):
 - 2.1 BODY, LOCKNUT & LOCKWASHER:
(FOR CCSF): PASSIVATED PER ASTM A-967.
(FOR CCNP): NICKEL PLATED PER AMS-QQ-N-290.
(FOR CC & CCCE): GOLD PLATED PER ASTM B-488 OVER NICKEL PLATED PER AMS-QQ-N-290.
 - 2.2 CENTER CONDUCTOR:
GOLD PLATED PER ASTM B-488 OVER NICKEL PLATED PER AMS-QQ-N-290.
 - 2.3 INSULATOR & EPOXY: NONE

DRAWING NO.	5110
REV.	—

APPLICABLE TENSOLITE DOCUMENTS				TOLERANCES AND NOTES EXCEPT AS NOTED				SEE NOTES				SEE NOTES		
WORK STD	PROD INST	ASST INST	NA	DIMENSIONS ARE IN INCHES	LINEAR	ANGULAR	FRACTION	DATE	APPROVAL INITIALS	DATE	MATERIAL	SIZE	SPECIFICATION	PROCUREMENT
NA	NA	NA	NA	± .015 ± .005 ± 1/2	± .005	ANGULAR ± 1/2°								
				1. MACHINE FINISH: $\frac{63}{\text{RMS}}$				Tensolite						
				2. BREAK ALL SHARP EDGES .003 MAX.				TITLE SMA FEMALE BULKHEAD FEEDTHROUGH STRAIGHT TO SOLDER POT TERMINATION						
				3. MACHINED FILLETS .005 MAX.				SCALE 10/1						
				4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH.				SUB-DIRECTORY/NAME 0L						
				5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 TYP. UNLESS OTHERWISE SPECIFIED.				SHEET 1 OF 1						
				6. DIMENSIONS TO BEAMS TO BEAM CENTERLINE.				DRAWN BY IMG 03.21.02						
				7. DIMENSIONS TO BEAMS TO BEAM CENTERLINE.				CHECKED						
				8. THREADS PER H-28.				QUALITY						
				9. REMOVE ALL BURRS.				ENGINEERING						
				10. REMOVE ALL BURRS.				ATV 05.10.02						
				RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.				SIZE C 30990						
								DRAWING NO. 5110						
								REV. —						