


4

3


2

1

P/N	APPLICABLE NOTES	(A) SLOT
-1	1,2	.012
-1CC	1,2	.012
-1CCCE	1,2	.012
-1CCCESF	1,2	.012
-1CCSF	1,2	.012
-1SF	1,2	.012
-2	1,2	.018
-2CC	1,2	.018
-2CCCE	1,2	.018
-2CCCESF	1,2	.018
-2CCSF	1,2	.018
-2SF	1,2	.018
-3	1,2	.028
-3CC	1,2	.028
-3CCCE	1,2	.028
-3CCCESF	1,2	.028
-3CCSF	1,2	.028
-3SF	1,2	.028
-4	1,2	.036
-4CC	1,2	.036
-4CCCE	1,2	.036
-4CCCESF	1,2	.036
-4CCSF	1,2	.036
-4SF	1,2	.036

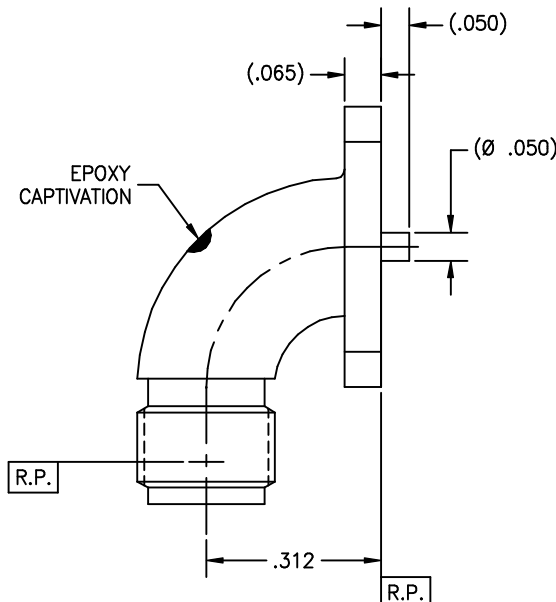

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	BY
-	A	ECO 14481 (Consolidate all dwgs)	05.02.02	ATV
-	B	ECO 14628	06.19.02	ATV
-	C	ECO 20619	10.08.07	DKN

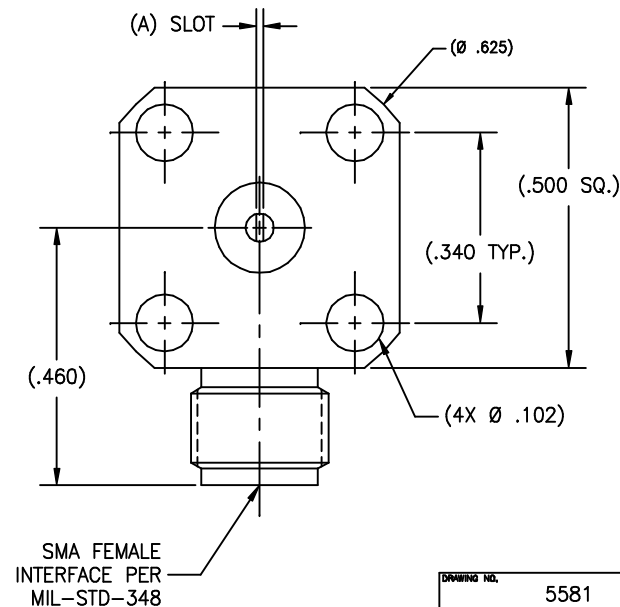

DRAWING NO.	5581	REV.	C
-------------	------	------	---

MATERIAL(S):	ELECTRICAL(S):	MECHANICAL(S):	ENVIRONMENTAL(S):
Body: 304 sst per SAE-AMS-5511. Center Conductor: BeCu alloy per ASTM B-196. Dielectric: PTFE per ASTM D-1710. Epoxy: (for CC's): Sigma VF Type HV. (for CE's): Ablebond 16-1	Impedance: 50 Ohms nominal. Frequency Range: DC to 18 GHz. VSWR: 1.06 + .005 x f(GHz). Insertion Loss: .10 dB max @ 6GHz. Working Voltage: 335 Vrms max @ sea level. Dielectric Withstanding Voltage: 1,500 Vrms min. R.F. HiPot Voltage: 1,000 Vrms min @ 5MHz. Corona Level: 375 Vrms @ 70,000 ft. Insulation Resistance: 5,000 MegOhms min. R.F. Leakage: -60 dB min. from 2-3 GHz. Contact Resistance: Initial: Center Contact: 3.0 Milliohm max. Outer Contact: 2.0 Milliohm max. After Environment: Center Contact: 4.0 Milliohm max. Outer Contact: NA.	Mating Characteristics: Interface per Mil-Std-348. Force To Engage & Disengage: Torque: 2 inch-pounds max. Longitudinal Force: NA. Center Contact Retention Force: Axial Force: 6 pounds min. Center Contact Captivation: Axial Force: 6 pounds max. Radial Torque: 4 inch-ounces max. Connector Durability: 500 cycles min @ 12 cycles/minute max. Permeability: Less than 2.0 mu.	Temperature Range: -65°C to +125°C. Thermal Shock: Mil-Std-202, Method 107, Test Cond. C. Moisture Resistance: Mil-Std-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity. Corrosion: Mil-Std-202, Method 101, Test Cond. B. Vibration: Mil-Std-202, Method 204, Test Cond. D. Shock: Mil-Std-202, Method 213, Test Cond. I.

FINISH(ES):	APPLICABLE TENSOLITE DOCUMENTS	TOLERANCES AND NOTES EXCEPT AS NOTED	SEE NOTES	SIZE	SEE NOTES	—
Body: (for SF's) Passivate per ASTM A-967. Body: (for Basic & CC's) Gold plate per ASTM B-488, over nickel under plate per AMS-QQ-N-290. Center Conductor: Gold plate per ASTM B-488, over nickel under plate per AMS-QQ-N-290.	WORK STD PROD INST ASSY INST	DIMENSIONS ARE IN INCHES LINEAR .XX ±.015 XXX ±.005 ANGULAR ± 1/2° FRACTION ± 1/32 1. MACHINE FINISH: 32 / RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET BEFORE PLATING. 7. CHAMFER ALL THREADS 45°. 8. THREADS PER H-28 9. REMOVE PRATED EDGES ON TEFLON. 10. REMOVE ALL BURRS.	MATERIAL APPROVAL INITIALS DATE DRAWN BY R.C. 03.27.02 CHECKED BY TEST ENGG QUALITY DESIGN ENGG MFG ENGG	Tensolite HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS Long Beach, California 90815 TITLE SMA FEMALE RADIUS RIGHT ANGLE 4 HOLE FLANGE (.500 SQ) MOUNT TO VER. SLOT TERMINATION SCALE 6:1 SUB-DIRECTORY/FILENAME OL SHEET 1 OF 1 C 30990 5581 REV. C		