P/N	APPLICABLE NOTE(S)
SF	1,2
CCSF	1,2

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	BY
—	—	—	—	—

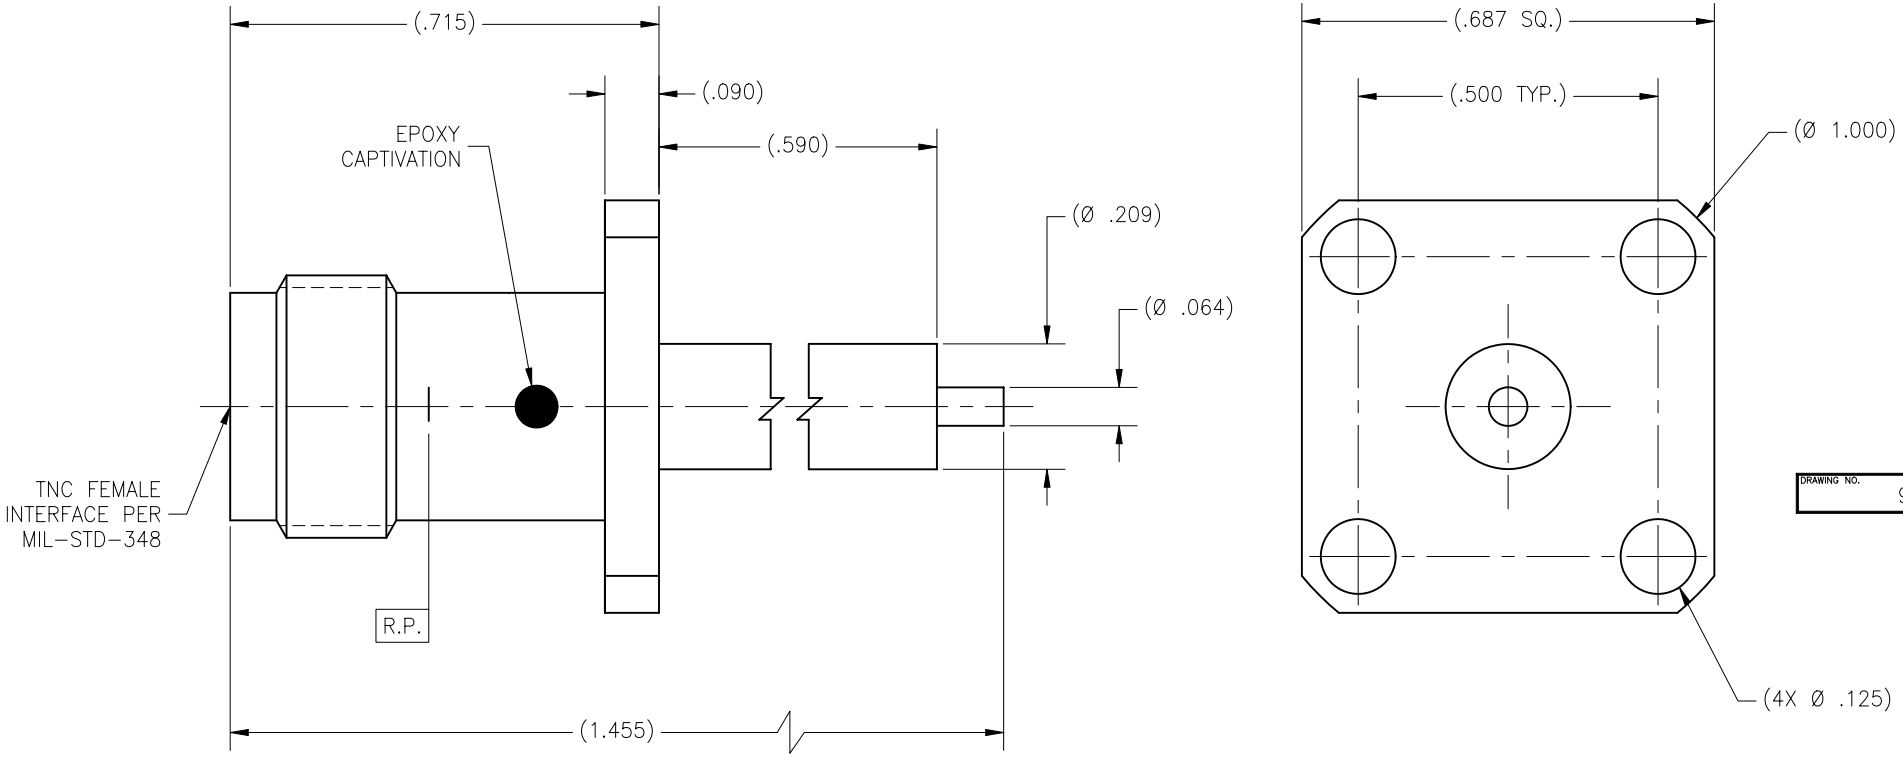

DRAWING NO.	REV.
9028	—

NOTE(S):

1. MATERIALS:
   - 1.1 BODY: 303 SST PER ASTM A-582.
   - 1.2 INSULATOR: PTFE PER ASTM D-1710
   - 1.3 CENTER CONDUCTOR: BeCu ALLOY C173 PER ASTM B-196.
   - 1.4 EPOXY: (FOR CCSF) SIGMA VF TYPE HV
2. FINISH(ES):
   - 2.1 BODY: PASSIVATED PER ASTM A-967.
   - 2.2 CENTER CONDUCTOR : GOLD PLATED PER ASTM B-488 OVER NICKEL PLATED PER AMS-QQ-N-290.
   - 2.3 INSULATOR & EPOXY: NONE

NOTICE

THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY TENSOLITE COMPANY AND ALL DESIGN, MANUFACTURING REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.

TOLERANCES AND NOTES EXCEPT AS NOTED

DIMENSIONS ARE IN INCHES.
LINEAR .XX ±.015 .XXX ±.005 ANGULAR ± 1/2°
FRACTION ± 1/32

1. MACHINE FINISH: 63 √ RMS
2. BREAK ALL SHARP EDGES .003 MAX.
3. MACHINED FILLETS .005 MAX.
4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH.
5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R.
6. DIMENSIONS TO BE MET BEFORE PLATING.
7. CHAMFER ALL THREADS 45°.
8. THREADS PER H-28
9. REMOVE FRAYED EDGES ON TEFLON.
10. REMOVE ALL BURRS.

MATERIAL	SIZE	SPECIFICATION	PROCUREMENT
SEE NOTES	–	SEE NOTES	–

NEXT ASSY

APPROVAL	INITIALS	DATE
DRAWN BY	IMG	04.12.02
CHECKED		
QUALITY		
ENGINEERING	ATV	04.12.02

Tensolite
HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS
Long Beach, California 90815

TITLE TNC FEMALE 4 HOLE FLANGE (.687 SQ.) PANEL MOUNT STRAIGHT TO TERMINATION

SCALE	SUB-DIRECTORY\FILENAME	SHEET	OF
6/1	OL_	1	1

SIZE	CAGE CODE	DRAWING NO.	REV.
C	30990	9028	—