

OM1502-11

Datasheet | 5G NR UHB Diversity Receive Module

Product Features

- Broadband frequency range: 3300MHz~4200MHz;
- Low noise finger;
- Flexible gain configuration ($\Delta=33\text{dB}$);
- No DC blocking capacitors required;
- MIPI 3.0 compatible;
- Covering 3GPP and 5G sub 6GHz low/mid bands:
42, 43, 48, n77, and n78;
- Small package ($2 \times 1.6 \times 0.7 \text{ mm}$).

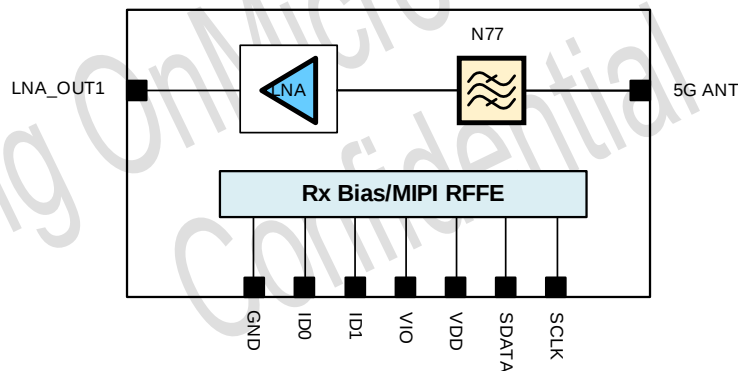
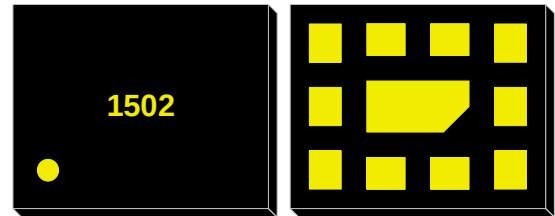


Figure 1. Functional Block Diagram.