

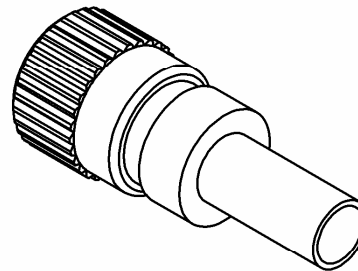



STRAIGHT PLUG CRIMP TYPE**FOR CABLE L910/34****R129A.083.000**

Series : ECO DIN1.6/5.6

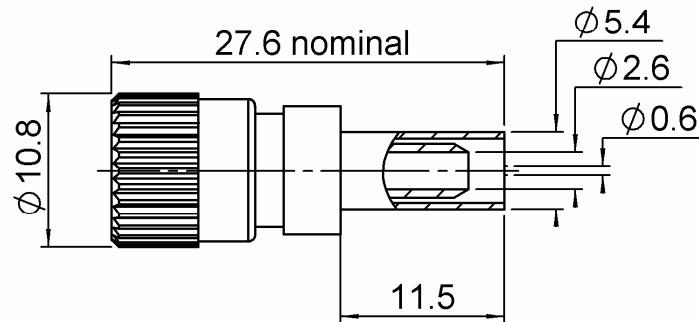

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NICKEL
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT	BRONZE	GOLD
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	BRASS	NICKEL
-	-	-
-	-	-

Issue : 0917 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STRAIGHT PLUG CRIMP TYPE**R129A.083.000****FOR CABLE L910/34**

Series : ECO DIN1.6/5.6

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	75	Ω
Frequency	0-1	GHz
VSWR	1.22 + 0.0000	x F(GHz) Maxi
Insertion loss	NA	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	330	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	1000	M Ω mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3.00	8.00	12.5	0.00	9.50	0.00

Assembly instruction : **Crimp 01**Recommended cable(s)
L910/34

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	NA N mini
- torque	0.15 N.cm

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	30 N mini
Axial force – Opposite end	30 N mini
Torque	NA N.cm mini

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.211.000	CRIMPING TOOL	4.52

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.0000 mm

Mating life	100 Cycles mini
Weight	7.6000 g

ENVIRONMENTAL

Operating temperature	-40/+85 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHER CHARACTERISTICS**Issue : 0917 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 