

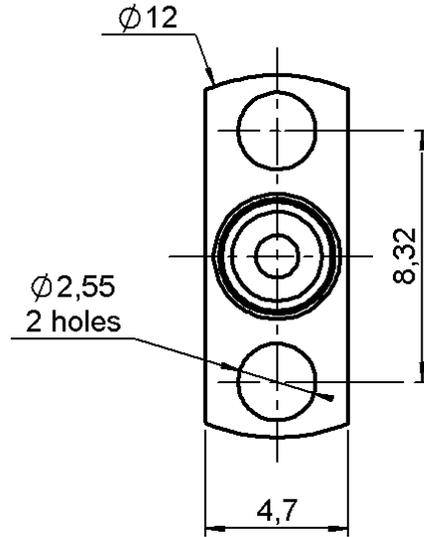


TWO HOLE FLANGE SHROUD 0.4MM


R222.450.001

FULL DETENT

Series : SMP

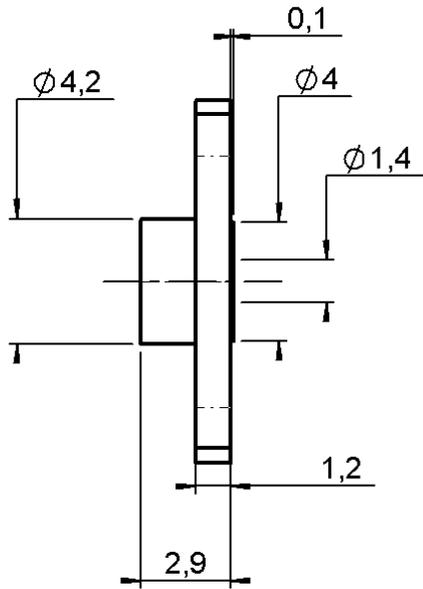


PANEL CUT OUT



	mm	
	Maxi	mini
A	4.15	4.05
B	2.60	2.50
C	8.38	8.28



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	STAINLESS STEEL	PASSIVATED .
CENTER CONTACT	-	-
OUTER CONTACT	-	-
INSULATOR	-	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0436 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



TWO HOLE FLANGE SHROUD 0.4MM

R222.450.001

FULL DETENT

Series : SMP

PACKAGING

SPECIFICATION

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance		NA	Ω
Frequency		NA	GHz
VSWR	NA +	0.000	x F(GHz) Maxi
Insertion loss		NA	\sqrt{F} (GHz) dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating		NA	Veff Maxi
Dielectric withstanding voltage		NA	Veff mini
Insulation resistance		NA	M Ω mini

Operating temperature	-65/+165	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHERS CHARACTERISTICS

Assembly instruction

Others :

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating end	NA	N	mini
Axial force – Opposite end	NA	N	mini
Torque	NA	N.cm	mini
Recommended torque			
Mating	NA	N.cm	
Panel nut	NA	N.cm	
Mating life	100	Cycles	mini
Weight	0.420	g	

Issue : 0436 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TWO HOLE FLANGE SHROUD 0.4MM**R222.450.001****FULL DETENT**

Series : SMP

**ADDITIONAL INFORMATIONS
MOUNTING INSTRUCTIONS**

1- Check the quality of the soldering, as well as the position of the glass seal in the package

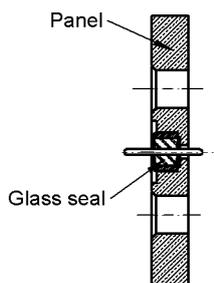


2- Place the receptacle and pre-assemble screw on the package.

Mount the aligning tool R282.860.020 into the receptacle to ensure a good concentricity.

Screw the receptacle on the package.

Remove the aligning tool

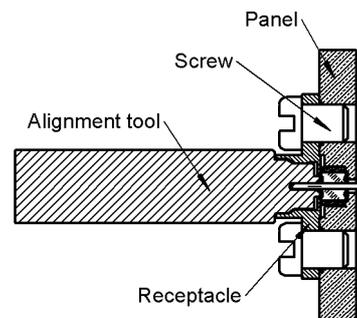

Issue : 0436 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.